

EXTERIOR WALL RECESSED

This collection of led wall recessed luminaires is ideal for directional lighting or a subtle accent. They provide safety, add atmosphere and guarantee additional style to your project.

www.deltalight.com/EWR



To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url. E.g. www.deltalight.com/2020424 or www.deltalight.com/heli-x-screen





INDEX

EXTERIOR WALL RECESSED



LOGIC MINI R
EXT 792



HELI X SCREEN
EXT 799



LOGIC MINI S
EXT 792



LOGIC W L
EXT 793



LOGIC W S
EXT 793



LED S C R
EXT 797



LED S GO IN FORTE
EXT 797


HELI X SCREEN	EXT 799
LEDS C R	EXT 797
LEDS GO IN FORTE	EXT 797
LOGIC MINI R	EXT 792
LOGIC MINI S	EXT 792
LOGIC W L	EXT 793
LOGIC W S	EXT 793

REQUIREMENTS

INSTALLATION


CONCRETE BOX 191
270 11 191

315 x 80




CONCRETE BOX 192
270 11 192

135 x 125



CONCRETE PACK LOGIC W L
304 32 96

315 x 80



CONCRETE PACK LOGIC W S
304 33 96

135 x 125



OPTIONS

INSTALLATION

CONCRETE BOX 188
270 11 188



Ø60 x 65

Ø67 x 70

CONTROL GEAR



LED POWER SUPPLY
24V-DC / 20W
300 89 24 20



146 x 55 x 19



LOGIC MINI W



55 x 50

55 x 50

CRI > 80

LOGIC MINI W R

LOGIC MINI W S



LED 0,6W / 40lm / 24V

LED 0,6W / 40lm / 24V

304 30 12 ◇

◇ = A / W

304 31 12 ◇

◇ = A / W




CE 0,2 IP54

OPTIONS
CONCRETE BOX 188
LED POWER SUPPLY 24V-DC

CE 0,2 IP54

OPTIONS
CONCRETE BOX 188
LED POWER SUPPLY 24V-DC

LOGIC W

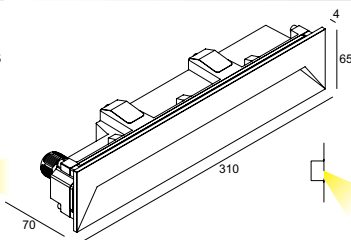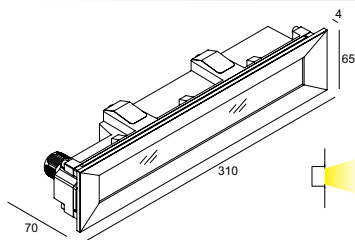

BOX / 110-135

BOX / 110-135

BOX / 115-140

CRI > 80

LOGIC W L F

LOGIC W L

CRI > 90

LOGIC W S

3000
K

LED CLUSTER 9,5W / 1270lm / 350mA

LED CLUSTER 9,5W / 1270lm / 350mA

3000
K

LED 7,1W / 774lm / 350mA

304 32 02 83 ◇

◇ = A / N / W

304 32 01 83 ◇

◇ = A / N / W

304 33 811 930 ◇

◇ = A / N / W

INCL. 1 x PG11
220-240V / 50-60Hz

◇ CE 1.0 IP65

REQUIREMENTS
CONCRETE BOX 191
or
CONCRETE PACK LOGIC W L

INCL. 1 x PG11
220-240V / 50-60Hz

◇ CE 1.0 IP65

REQUIREMENTS
CONCRETE BOX 191
or
CONCRETE PACK LOGIC W L

INCL. 1 x PG11
110-240V / 50-60Hz

◇ CE 1.0 IP65

REQUIREMENTS
CONCRETE BOX 192
or
CONCRETE PACK LOGIC W S









FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

CONCRETE BOX 151
302 19 21

42 x 42 x 58

43 x 43

CONCRETE BOX TR 152
302 19 22


42 x 42 x 58

43 x 43

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

LEDS C®



41 x 38

CRI > 80

LEDS C® R ST

4000 K

LED [A] 1,1W / 130lm / 350mA

302 20 34 ◇
◇ = ANO**3000 K**


LED [A] 1,1W / 120lm / 350mA

302 20 32 ◇
◇ = ANO

CE 0,1 IP67

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM

LEDS GO IN FORTE



38 x 38 x 45

LEDS GO IN FORTE

LED [A] 1,1W / 130lm / 350mA

302 10 34 ◇
◇ = ANO

LED [A] 1,1W / 120lm / 350mA

302 10 32 ◇
◇ = ANO

CE 0,1 IP67

OPTIONS
CONCRETE BOX 151
CONCRETE BOX TR 152
LED POWER SUPPLY 350mA-DC / DIM



FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

A B C

CONCRETE BOX 187

80 x 95 x 70

85 x 100

270 11 187

CONTROL GEAR


LED POWER SUPPLY

ALL INFO ON FOLD-OUT COVER

CTRL
DELTA
R

HELI X
SCREEN LED





75 x 87 x 60

CRI > 80

HELI X SCREEN LED

4000
K

LED [A] 1,1W / 130lm / 350mA

202 04 24 ◇

◇ = A / N

3000
K

LED [A] 1,1W / 120lm / 350mA

202 04 22 ◇

◇ = A / N

◇

CE

0,3

IP54

OPTIONS

CONCRETE BOX 187

LED POWER SUPPLY 350mA-DC / DIM

OTHER CRI OR KELVIN ON REQUEST

deltalight.com EXT 799