

EXTERIOR WALL SURFACE

Upgrade your façade with soft lighting elements or create a playful lighting pattern on your wall. Delta Light's wall mounted luminaires can do both. A remarkable feature in the wall surface range is the use of led in combination with a lens, fusing architectural light effects and energy efficiency.

www.deltalight.com/EWS



To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url. E.g. www.deltalight.com/23210811930 or www.deltalight.com/kix



INDEX

EXTERIOR WALL SURFACE



SUPERNOVA XS X
INT 805



MONTUR SQL
INT 815



KIX
EXT 819



MONO LED
EXT 835



VIKTOR
EXT 847



BUTLER W
INT 807



MONTUR R
INT 815



INDUSTRIAL S
EXT 823



GALA L LED
EXT 839



TWEETER X W
EXT 849



MONTUR S
EXT 810



SONTUR R
INT 815



LOOK OUT
EXT 825



WANT-IT
INT 841



NOX
EXT 851



MONTUR M
EXT 810



STIG
EXT 817



TOPIX L X
EXT 827



VISA X LED
EXT 843



ULTRA X LED
EXT 853




MONTUR L
EXT 811



KIX S
EXT 818



YUPI X
EXT 829



TIGA LED
EXT 843



DOX 100
EXT 855



SONTUR L
EXT 811



KIX M
EXT 819



MOMBA LED
EXT 831



VISION OUT
EXT 845

BUTLER W	EXT 807
DOX 100	EXT 855
GALA L LED	EXT 839
INDUSTRIAL S	EXT 823
KIX	EXT 819
KIX M	EXT 819
KIX S	EXT 818
LOOK OUT	EXT 825
MOMBA LED	EXT 831
MONO LED	EXT 835
MONTUR L	EXT 811
MONTUR M	EXT 810
MONTUR R	EXT 815
MONTUR S	EXT 810
MONTUR SQL	EXT 815
NOX	EXT 851
SONTUR L	EXT 811
SONTUR R	EXT 815
STIG	EXT 817
SUPERNOVA XS X	EXT 805
TIGA LED	EXT 843
TOPIX L X	EXT 827
TWEETER X W	EXT 849
ULTRA X LED	EXT 853
VIKTOR	EXT 847
VISA X LED	EXT 843
VISION OUT	EXT 845
WANT-IT	EXT 841
YUPI X	EXT 829







SUPERNOVA XS X

NEW



NEW



CRI > 80

3000
K

FULL / GLASS OPAL



SUPERNOVA XS 260 X

LED CLUSTER 10W / 900lm

274 87 2610 83 ◇

◇ = N / W

NON ADJUSTABLE
220-240V / 50-60Hz

◇ CE 2,4 IP64

SUPERNOVA XS PIVOT 260 X

LED CLUSTER 10W / 900lm

274 88 2610 83 ◇

◇ = N / W

ADJUSTABLE 0°-45° / 360°
220-240V / 50-60Hz

◇ CE 2,9 IP64



CRI > 90

3000
K


FE

2700
K

FE



BUTLER W

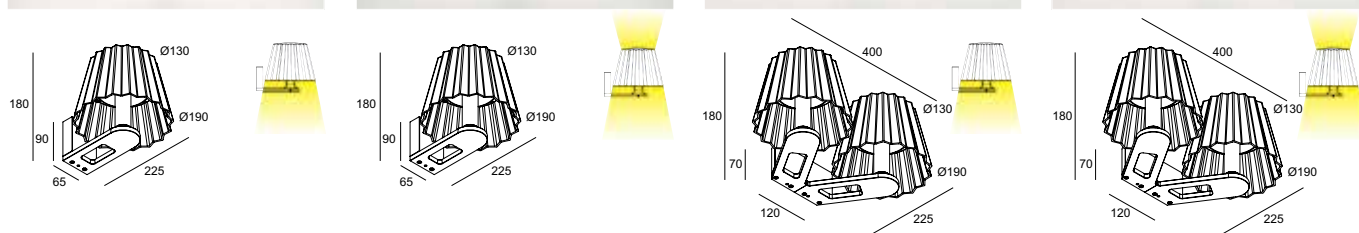

BUTLER W	BUTLER W DOWN-UP	BUTLER W D	BUTLER W D DOWN-UP
LED CLUSTER 16W / 1216lm	LED CLUSTER 6W / 500lm (UP) LED CLUSTER 10W / 760lm (DOWN)	2 x LED CLUSTER 16W / 1216lm	2 x LED CLUSTER 6W / 500lm (UP) 2 x LED CLUSTER 10W / 760lm (DOWN)
222 031 11 93 ED8 ◇ ◇ = A / B	222 031 12 93 ED8 ◇ ◇ = A / B	222 032 11 93 ED8 ◇ ◇ = A / B	222 032 12 93 ED8 ◇ ◇ = A / B
LED CLUSTER 16W / 1154lm	LED CLUSTER 6W / 475lm (UP) LED CLUSTER 10W / 725lm (DOWN)	2 x LED CLUSTER 16W / 1154lm	2 x LED CLUSTER 6W / 475lm (UP) 2 x LED CLUSTER 10W / 725lm (DOWN)
222 031 11 92 ED8 ◇ ◇ = A / B	222 031 12 92 ED8 ◇ ◇ = A / B	222 032 11 92 ED8 ◇ ◇ = A / B	222 032 12 92 ED8 ◇ ◇ = A / B
220-240V / 50-60Hz MAINS DIMMING (FE)	220-240V / 50-60Hz MAINS DIMMING (FE)	220-240V / 50-60Hz MAINS DIMMING (FE)	220-240V / 50-60Hz MAINS DIMMING (FE)
⏏ CE 1.3 IP56	⏏ CE 1.5 IP56	⏏ CE 2.8 IP56	⏏ CE 3.2 IP56

DESIGN BY ARIK LEVY & DELTA LIGHT®
WWW.DELTALIGHT.COM/BUTLERBYARIKLEVY











MONTUR S




IK07



IK07



MONTUR M



IK07

CRI > 80

MONTUR S LED

3000
K

LED CLUSTER 6,3W / 808lm / 350mA

232 112 83 ◇
◇ = B

2700
K

NEW

LED CLUSTER 6,3W / 808lm / 350mA

232 112 82 ◇
◇ = B

INCL. GLASS OPAL
100-240V / 50-60Hz

◇ CE 2.0 IP65

MONTUR M LED

LED CLUSTER 6,3W / 840lm / 350mA

232 212 83 ◇
◇ = B

LED CLUSTER 6,3W / 840lm / 350mA

232 212 82 ◇
◇ = B

INCL. GLASS OPAL
100-240V / 50-60Hz

◇ CE 2.6 IP65

MONTUR M E27

CTRL
DELTA
R

A60 max. 40W


232 213 00 ◇
◇ = B

INCL. GLASS CLEAR
E27Ls / 100-240V / 50-60Hz

◇ CE 2.5 IP65


OPTIONS
LED SOLUTION - PAG TEC 4-5

MONTUR L

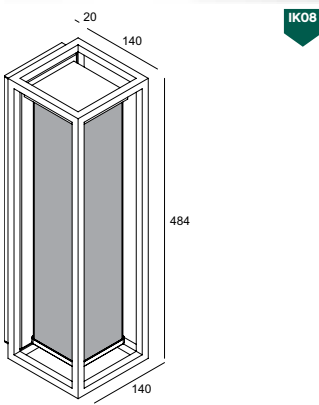

IK08

SONTUR L

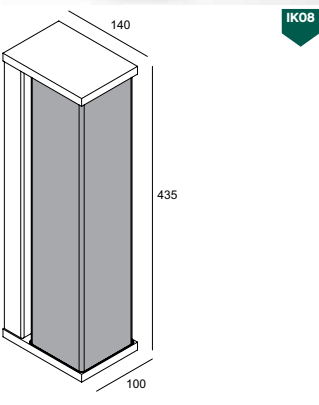

IK08

CRI > 80

3000
K

MONTUR L PC LED

LED CLUSTER 14,7W / 1960lm / 700mA

232 318 83 ◇
◇ = B

INCL.PC OPAL
220-240V / 0 | 50-60Hz
◇ CE 2.6 IP54

SONTUR L LED

LED CLUSTER 14,7W / 1960lm / 700mA

232 008 83 ◇
◇ = B

INCL.PC OPAL
220-240V / 0 | 50-60Hz
◇ CE 1.5 IP54



THONE ARCHITECTUUR / INTERIOR DESIGN TIM VAN STEENBERGEN










MONTUR




SONTUR

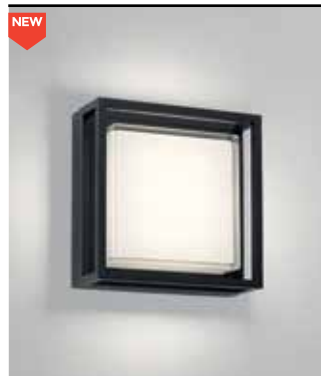

IK07



IK07



IK07

CRI > 80

MONTUR SQL LED

3000
K

LED CLUSTER 7,4W / 1000lm / 350mA

232 812 83 ◇
◇ = B2700
K

LED CLUSTER 7,4W / 1000lm / 350mA

232 812 82 ◇
◇ = BINCL. GLASS OPAL
100-240V / 50-60Hz

◇ CE 2,1 IP65

MONTUR R LED

LED CLUSTER 6,3W / 840lm / 350mA

232 712 83 ◇
◇ = B

LED CLUSTER 6,3W / 840lm / 350mA

232 712 82 ◇
◇ = BINCL. GLASS OPAL
100-240V / 50-60Hz

◇ CE 2,1 IP65

SONTUR R LED


LED CLUSTER 6,3W / 840lm / 350mA

232 711 83 ◇
◇ = B

LED CLUSTER 6,3W / 840lm / 350mA

232 711 82 ◇
◇ = BINCL. GLASS OPAL
100-240V / 50-60Hz

◇ CE 1,8 IP65

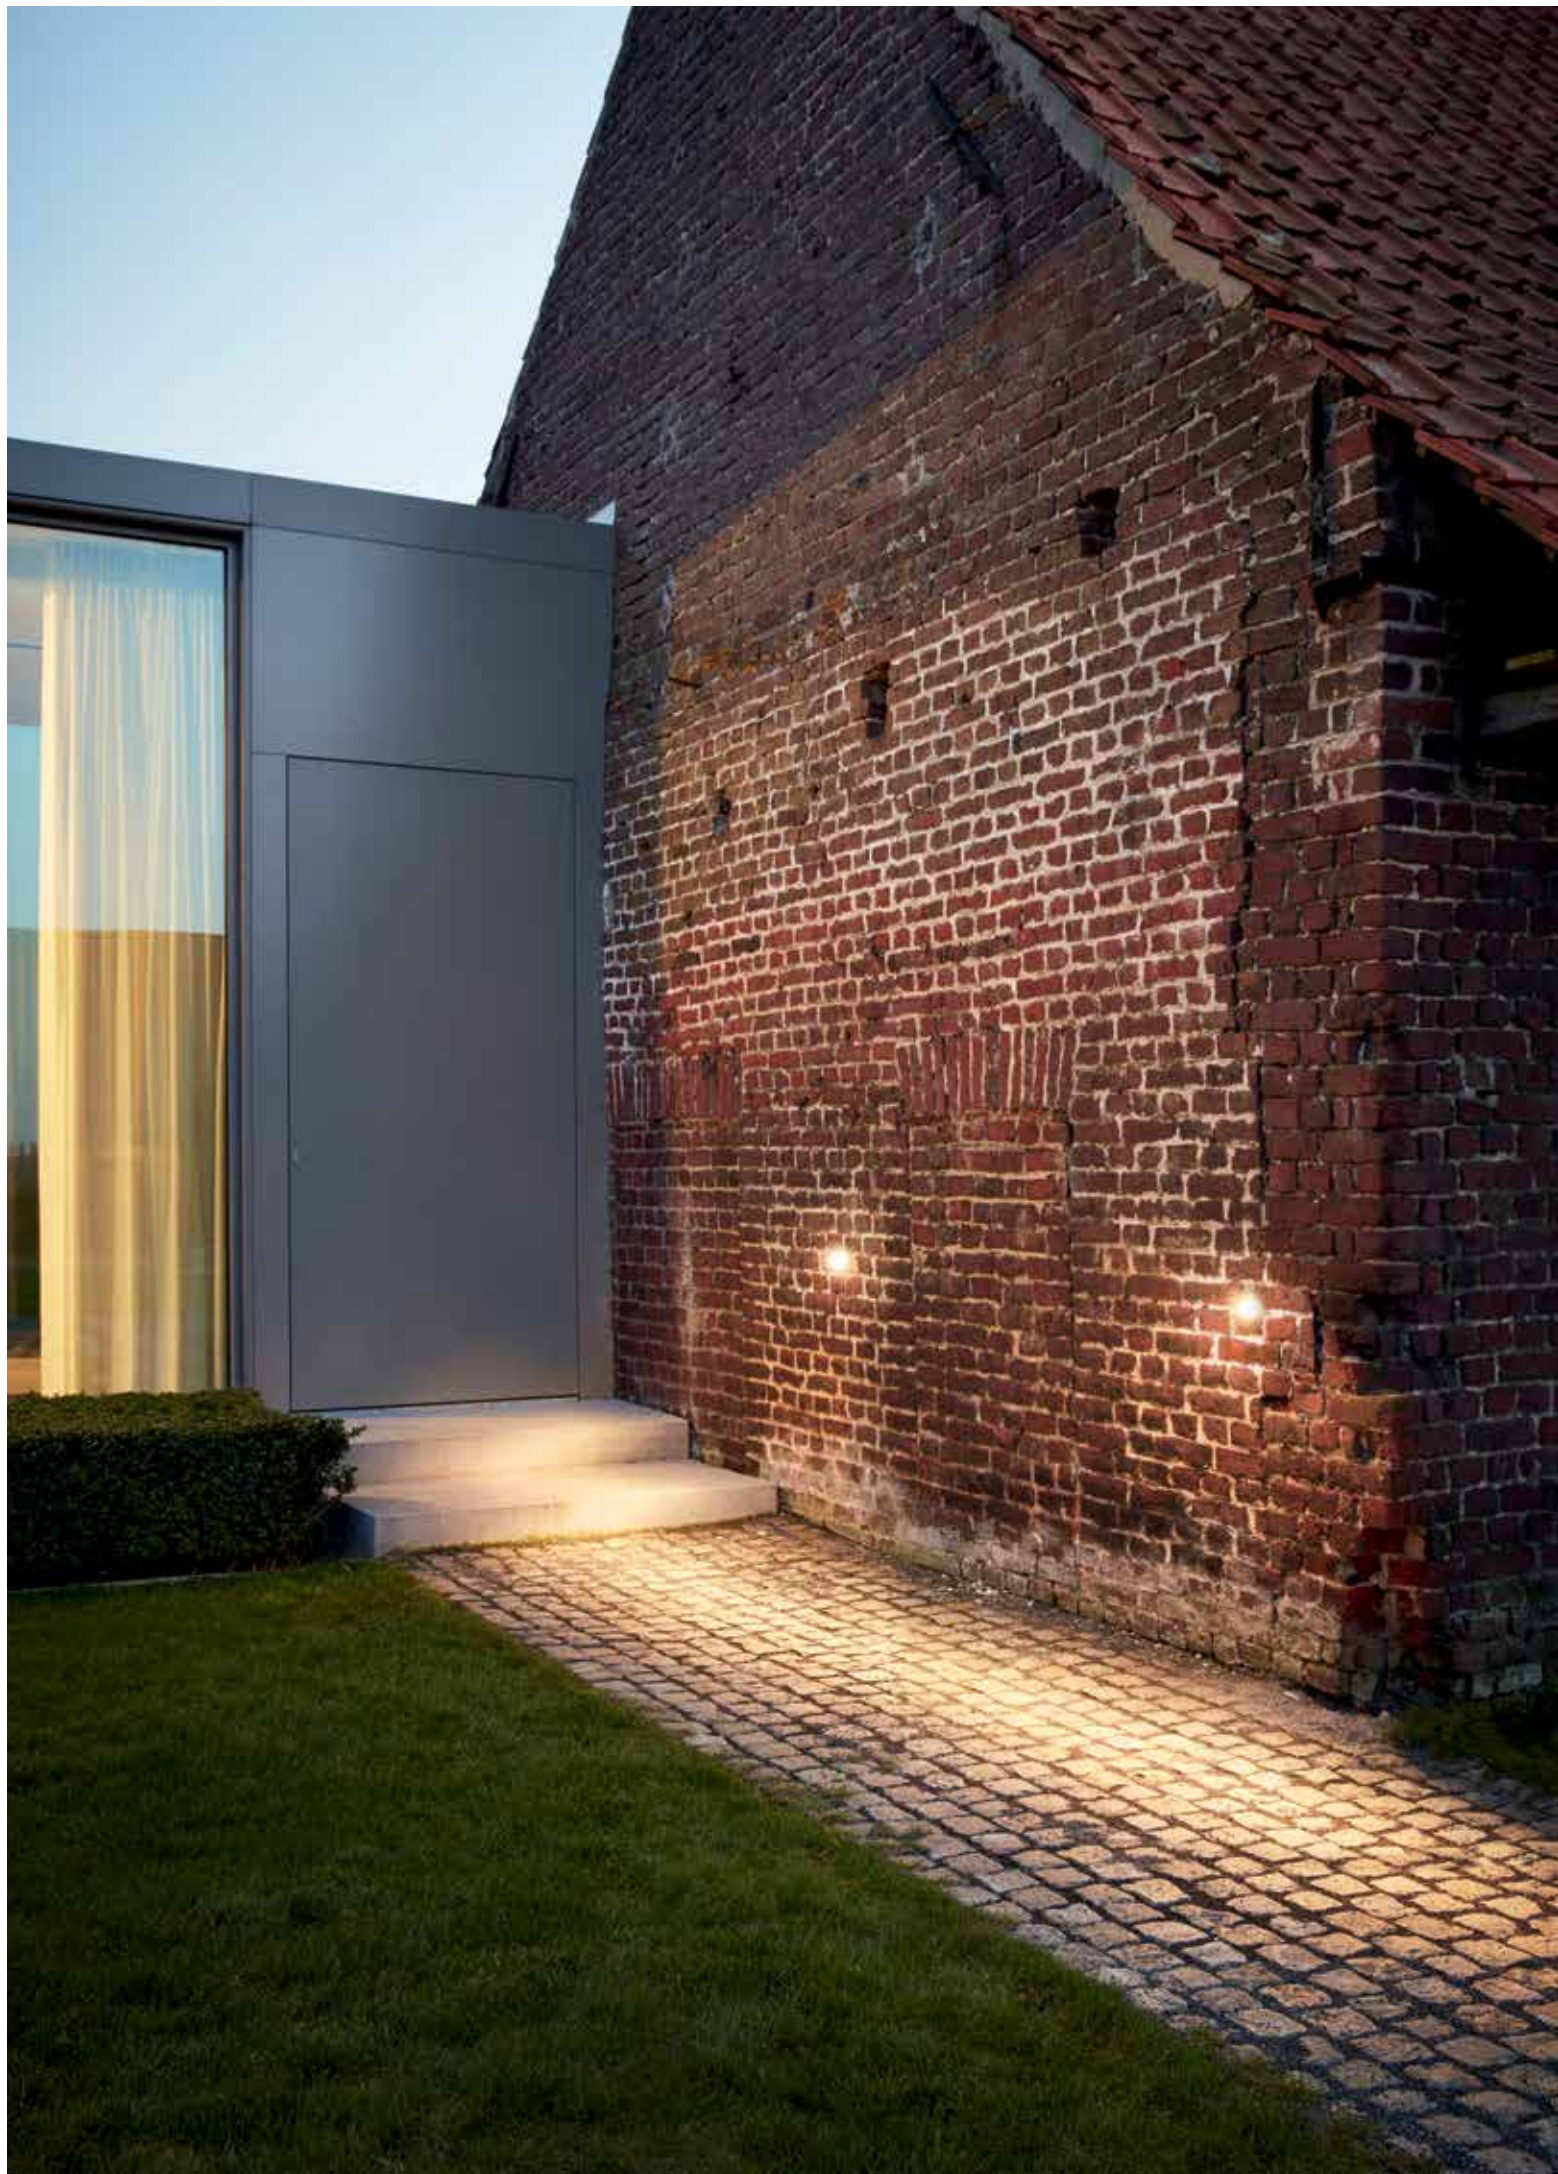

FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

STRAP

232 20 99

MAX. Ø200mm



CONTROL GEAR

LED POWER SUPPLY

ALL INFO ON FOLD-OUT COVER




STIG N + STRAP



STIG

NEW



CRI > 80

STIG

3000
K

LED [E] 6W / 570lm / 500mA
LED [E] 8,7W / 723lm / 700mA

232 20 83 ◇
◇ = N

ADJUSTABLE
INCL. 1 x CABLE H05 RN-F 2 x 1mm² 2m

◇ CE 0.5 IP65

OPTIONS
STRAP
LED POWER SUPPLY 500-700mA-DC / DIM



KIX + HONEYCOMB KIX + KAP KIX

FULL INFO TECHNICAL CHAPTER

OPTIONS

CONTROL GEAR

LED POWER SUPPLY

ALL INFO ON FOLD-OUT COVER

INSTALLATION

STRAP

232 20 99

MAX. Ø200mm

FULL INFO TECHNICAL CHAPTER

ACCESSORIES

KAP KIX ◇

232 10 00 ◇

◇ = N

Ø102 / Ø81 / H98

HONEYCOMB KIX ◇

232 10 03 ◇

◇ = N

Ø70

DELTA R

KIX S

CRI > 80

3000 K

SP 10°

KIX S

LED [A] 1,1W / 120lm / 350mA

LED [A] 1,6W / 168lm / 500mA

LED [A] 2,3W / 223lm / 700mA

232 08 831 ◇

◇ = A / N

ADJUSTABLE

INCL. 1 x CABLE H05 RN-F 2 x 1mm² 2m

CE

0,3

IP65

OPTIONS

STRAP

LED POWER SUPPLY 350-700mA-DC / DIM



CRI > 90

KIX M

3000
K

LED 6,4W / 587lm / 350mA

REFL
FL
30°232 12 933 ◇
◇ = A / NADJUSTABLE
INCL. 1 x KAP STRIPER B (REMOVABLE)
100-240V / 50-60Hz

CE 0,9 IP65



IK07

CRI
DELTA
R

CRI > 90

KIX

3000
KLED [F] 3,2W / 243lm / 1050mA
LED [F] 4,3W / 279lm / 1400mALENS
SP
6°

NEW

232 10 939 ◇
◇ = A / N

ADJUSTABLE

CE 0,9 IP65

OPTIONS

LED POWER SUPPLY 1050-1400mA-DC / DIM

ACCESSORIES

KAP KIX

HONEYCOMB KIX

CRI > 90

3000
K

LED 7,1W / 774lm / 350mA

REFL
SP
11°232 10 811 931 ◇
◇ = A / NREFL
FL
30°232 10 811 932 ◇
◇ = A / NREFL
WFL
55°232 10 811 933 ◇
◇ = A / NWFL
120°232 10 811 930 ◇
◇ = A / N

ADJUSTABLE

100-240V / 50-60Hz

CE 0,9 IP65

ACCESSORIES

KAP KIX

HONEYCOMB KIX

CRI > 90

KIX HP

CRI
DELTA
R3000
K

LED [J] 16,8W / 1995lm / 500mA

REFL
SP
11°232 10 21 931 ◇
◇ = A / NREFL
FL
30°232 10 21 932 ◇
◇ = A / NREFL
WFL
55°232 10 21 933 ◇
◇ = A / N

ADJUSTABLE

CE 0,9 IP65

OPTIONS

LED POWER SUPPLY 500mA-DC / DIM


ACCESSORIES

KAP KIX

HONEYCOMB KIX





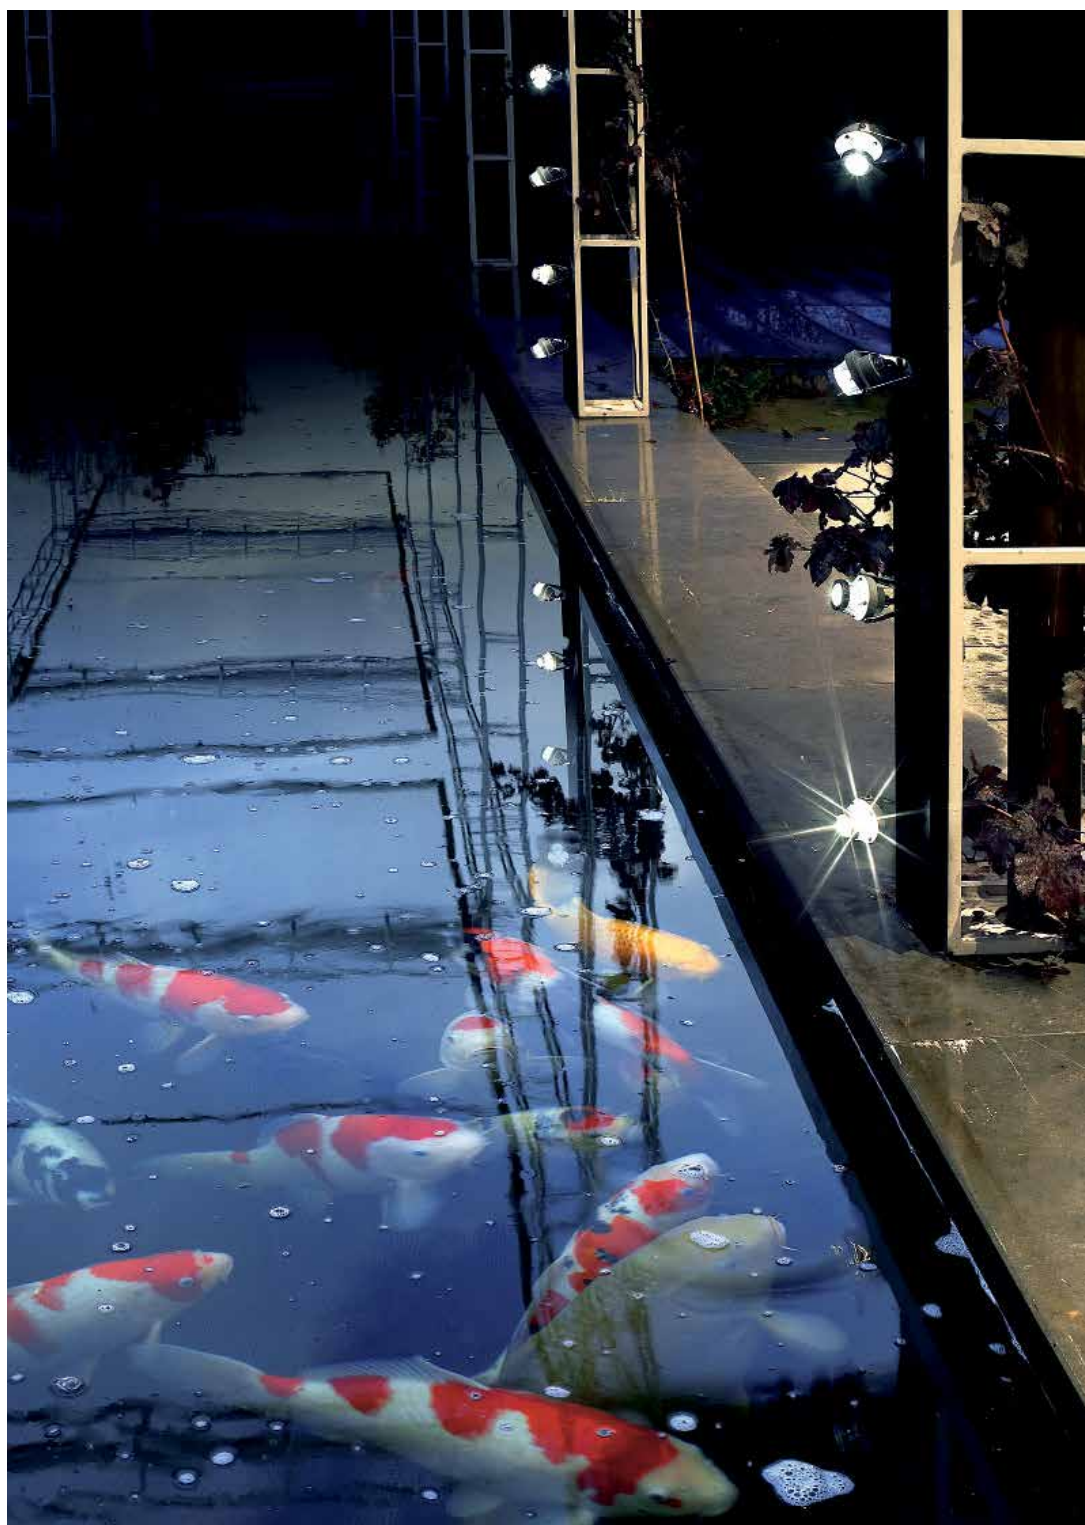


FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

CBOX

216 12 00



142 x 142 x 300

CBOX 350mA / 10W

216 14 35

140 x 140 x 173

142 x 142 x 300

STRAP

232 20 99

MAX. Ø200mm





CONTROL GEAR

LED POWER SUPPLY

ALL INFO ON FOLD-OUT COVER

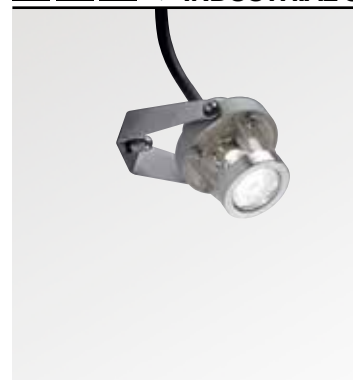

INDUSTRIAL S


CRI > 80

INDUSTRIAL S

4000
K

LED [A] 1,1W / 130lm / 350mA
 LED [A] 1,6W / 181lm / 500mA
 LED [A] 2,3W / 242lm / 700mA

306 01 04 ◇
 ◇ = A

3000
K

LED [A] 1,1W / 120lm / 350mA
 LED [A] 1,6W / 168lm / 500mA
 LED [A] 2,3W / 223lm / 700mA

306 01 02 ◇
 ◇ = A

INCL. 1 x CABLE HO5 RN-F 2 x 0,75mm² 2m


 IP67

OPTIONS


CBOX / CBOX 350mA

STRAP

LED POWER SUPPLY 350-700mA-DC / DIM



FULL INFO TECHNICAL CHAPTER			OPTIONS	
INSTALLATION				
CONCRETE BOX 153	43 x 43 x 60	43 x 43		
302 20 21				
CONCRETE BOX TR 154	43 x 43 x 60	43 x 43		
302 20 22				
CONTROL GEAR				
LED POWER SUPPLY				
ALL INFO ON FOLD-OUT COVER				



41 x 38

CRI > 80

LOOK OUT


3000
K

LED [A] 1,6W / 168lm / 500mA

304 13 12 ◇
◇ = A


CE 0,2 IP54

OPTIONS
CONCRETE BOX 153
CONCRETE BOX TR 154
LED POWER SUPPLY 500mA-DC / DIM

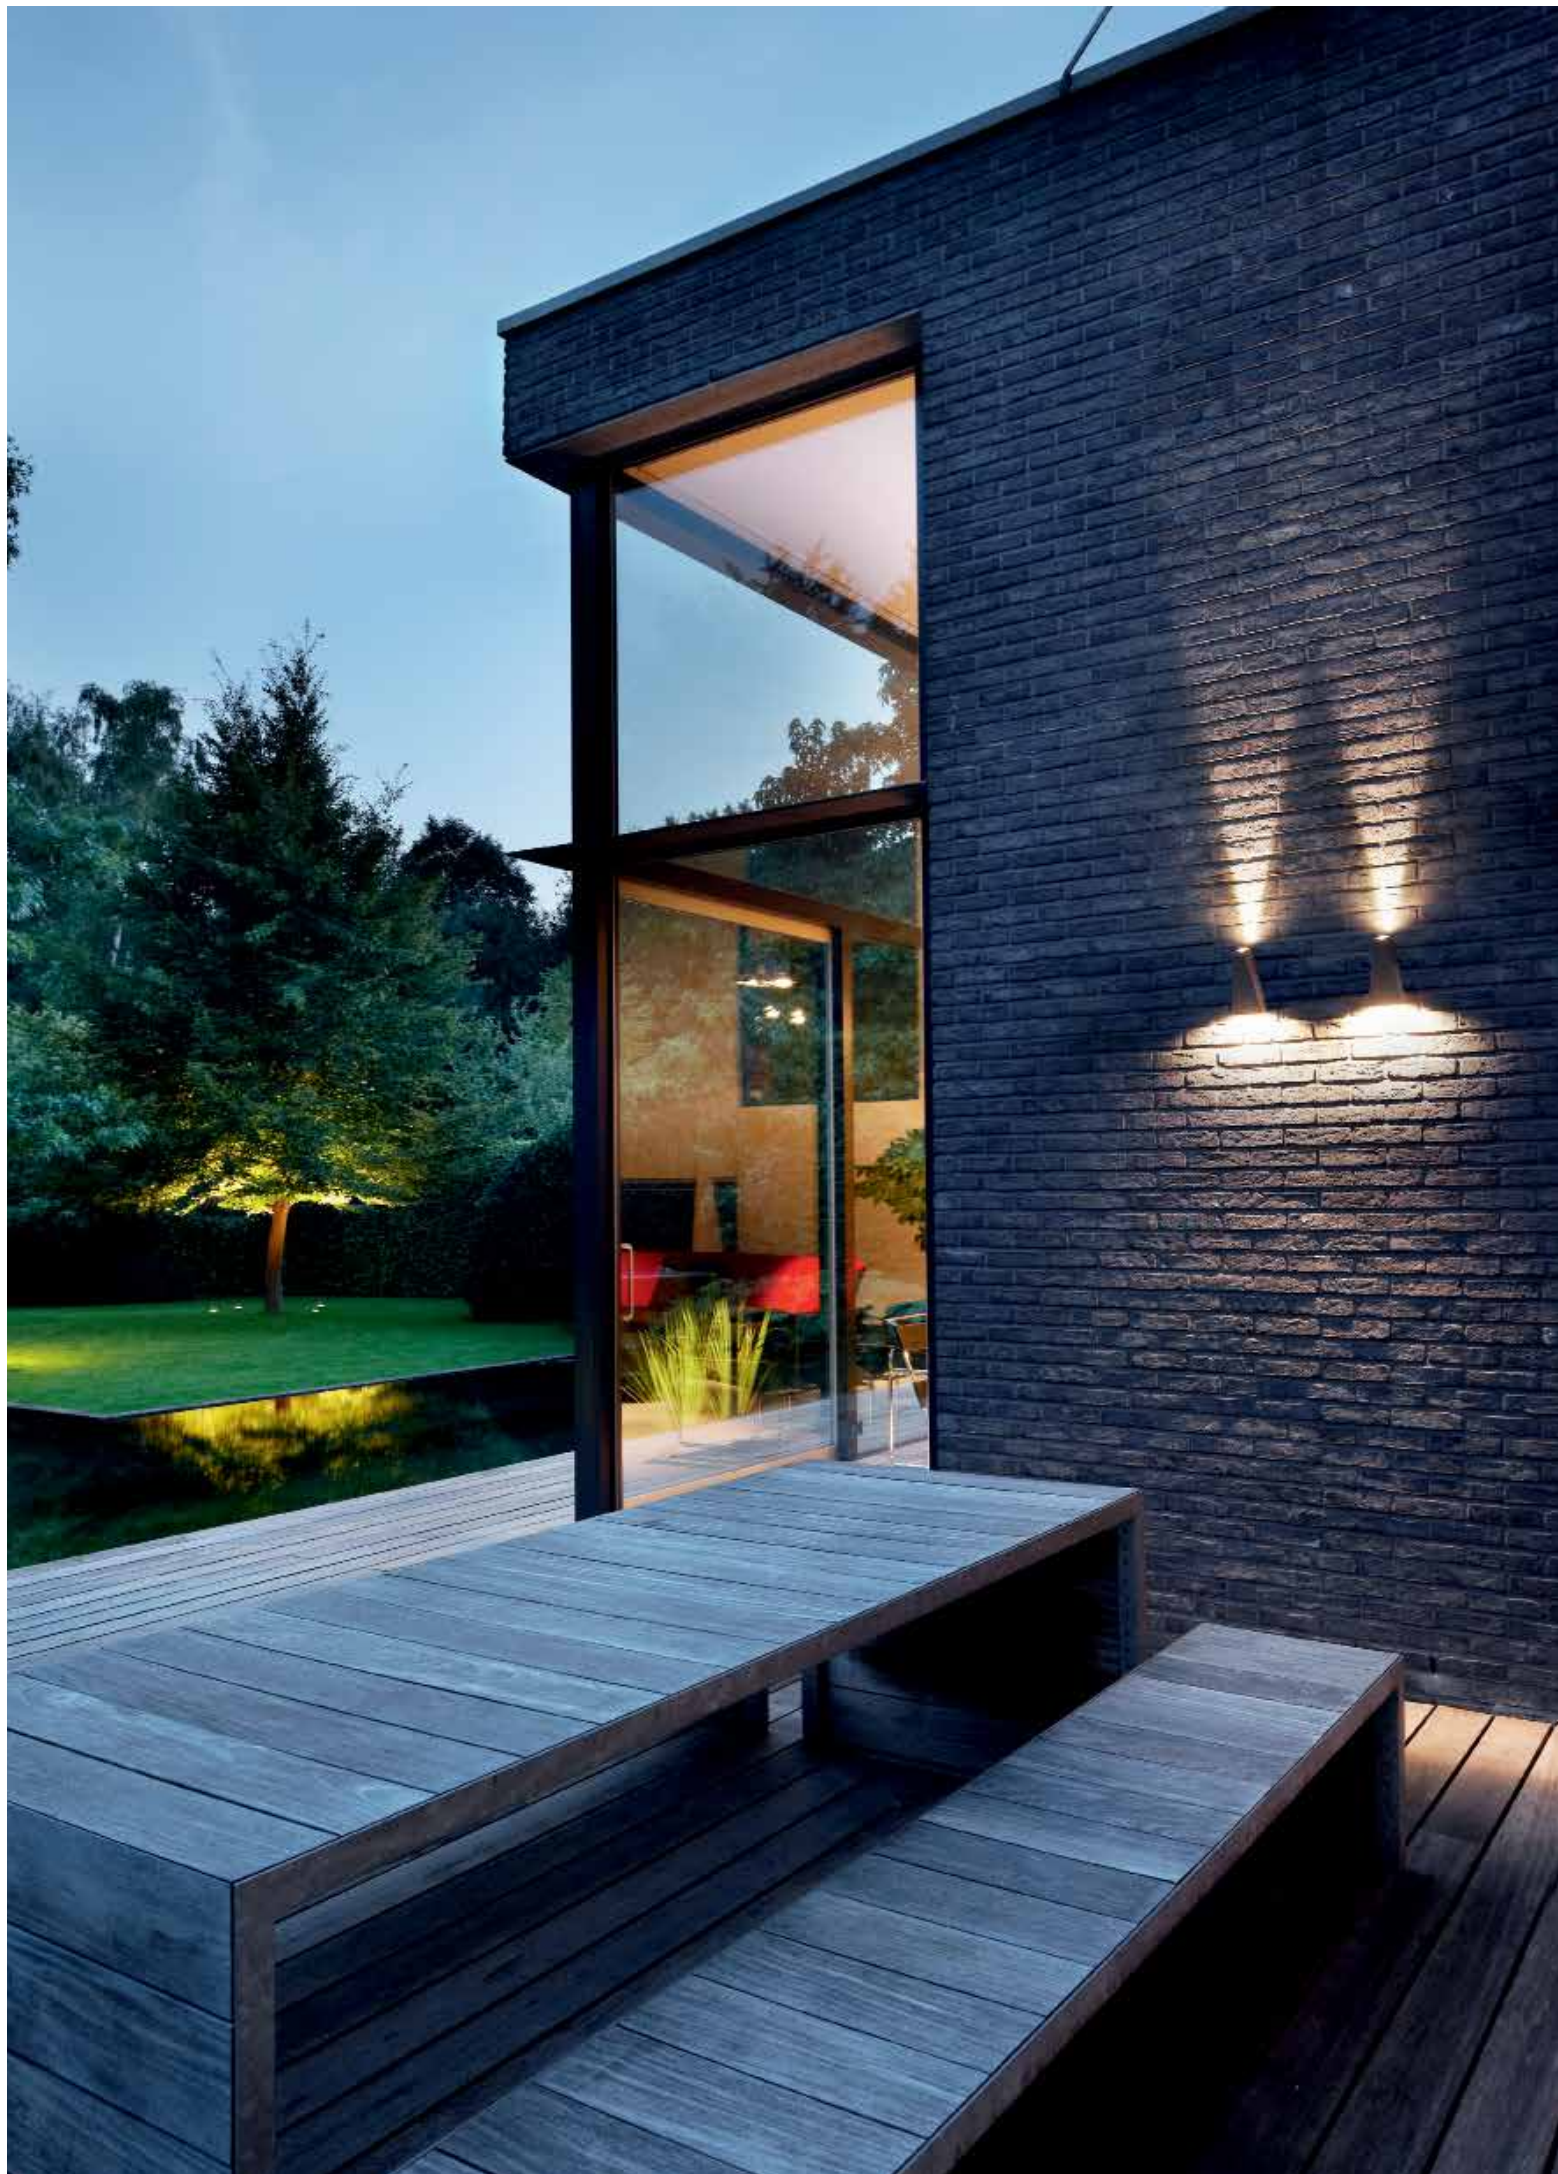



TOPIX L X



CRI > 80

TOPIX L X W W

3000
K

2 x LED 3,5W / 210lm / 350mA

304 17 52 ◇
◇ = A / G

120-240V / 50-60Hz

□ CE 1,0 IP55





FULL INFO TECHNICAL CHAPTER

OPTIONS


CONTROL GEAR

LED POWER SUPPLY

ALL INFO ON FOLD-OUT COVER



YUPI X



CRI > 80

3000
K

YUPI X LED

LED [A] 1,1W / 120lm / 350mA
LED [A] 1,6W / 168lm / 500mA

279 91 22 ◇
◇ = A / W



CE 0.5 IP65

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM





MOMBA LED



CRI > 80

3000
KLENS
SP
4°

MOMBA LED SP

LED 2,3W / 223lm / 700mA

225 20 18112 ◇
◇ = N

120-240V / 50-60Hz

◇ CE 0,9 IP65

MOMBA DOWN-UP LED SP

2 x LED 2,3W / 223lm / 700mA

225 20 18212 ◇
◇ = N

120-240V / 50-60Hz

◇ CE 1,3 IP65



CRI > 90

3000
K

MOMBA LED

LED 7,1W / 774lm / 350mA

225 20 811 930 ◇
◇ = A / N

100-240V / 50-60Hz

◇ CE 0,9 IP65

MOMBA DOWN-UP LED

2 x LED 7,1W / 774lm / 350mA

225 20 812 930 ◇
◇ = A / N

220-240V / 50-60Hz

◇ CE 1,3 IP65



MOMBA DOWN-UP LED SP



MOMBA DOWN-UP LED











MONO LED



CRI > 80

MONO LED

MONO DOWN-UP LED

3000
K

LED 7,1W / 928lm / 350mA

2 x LED 7,1W / 928lm / 350mA

223 11 811 930 ◇
◇ = A / G

223 51 812 930 ◇
◇ = A / G


100-240V / 50-60Hz

220-240V / 50-60Hz

□ CE 0,6 IP55

◇ CE 0,9 IP55



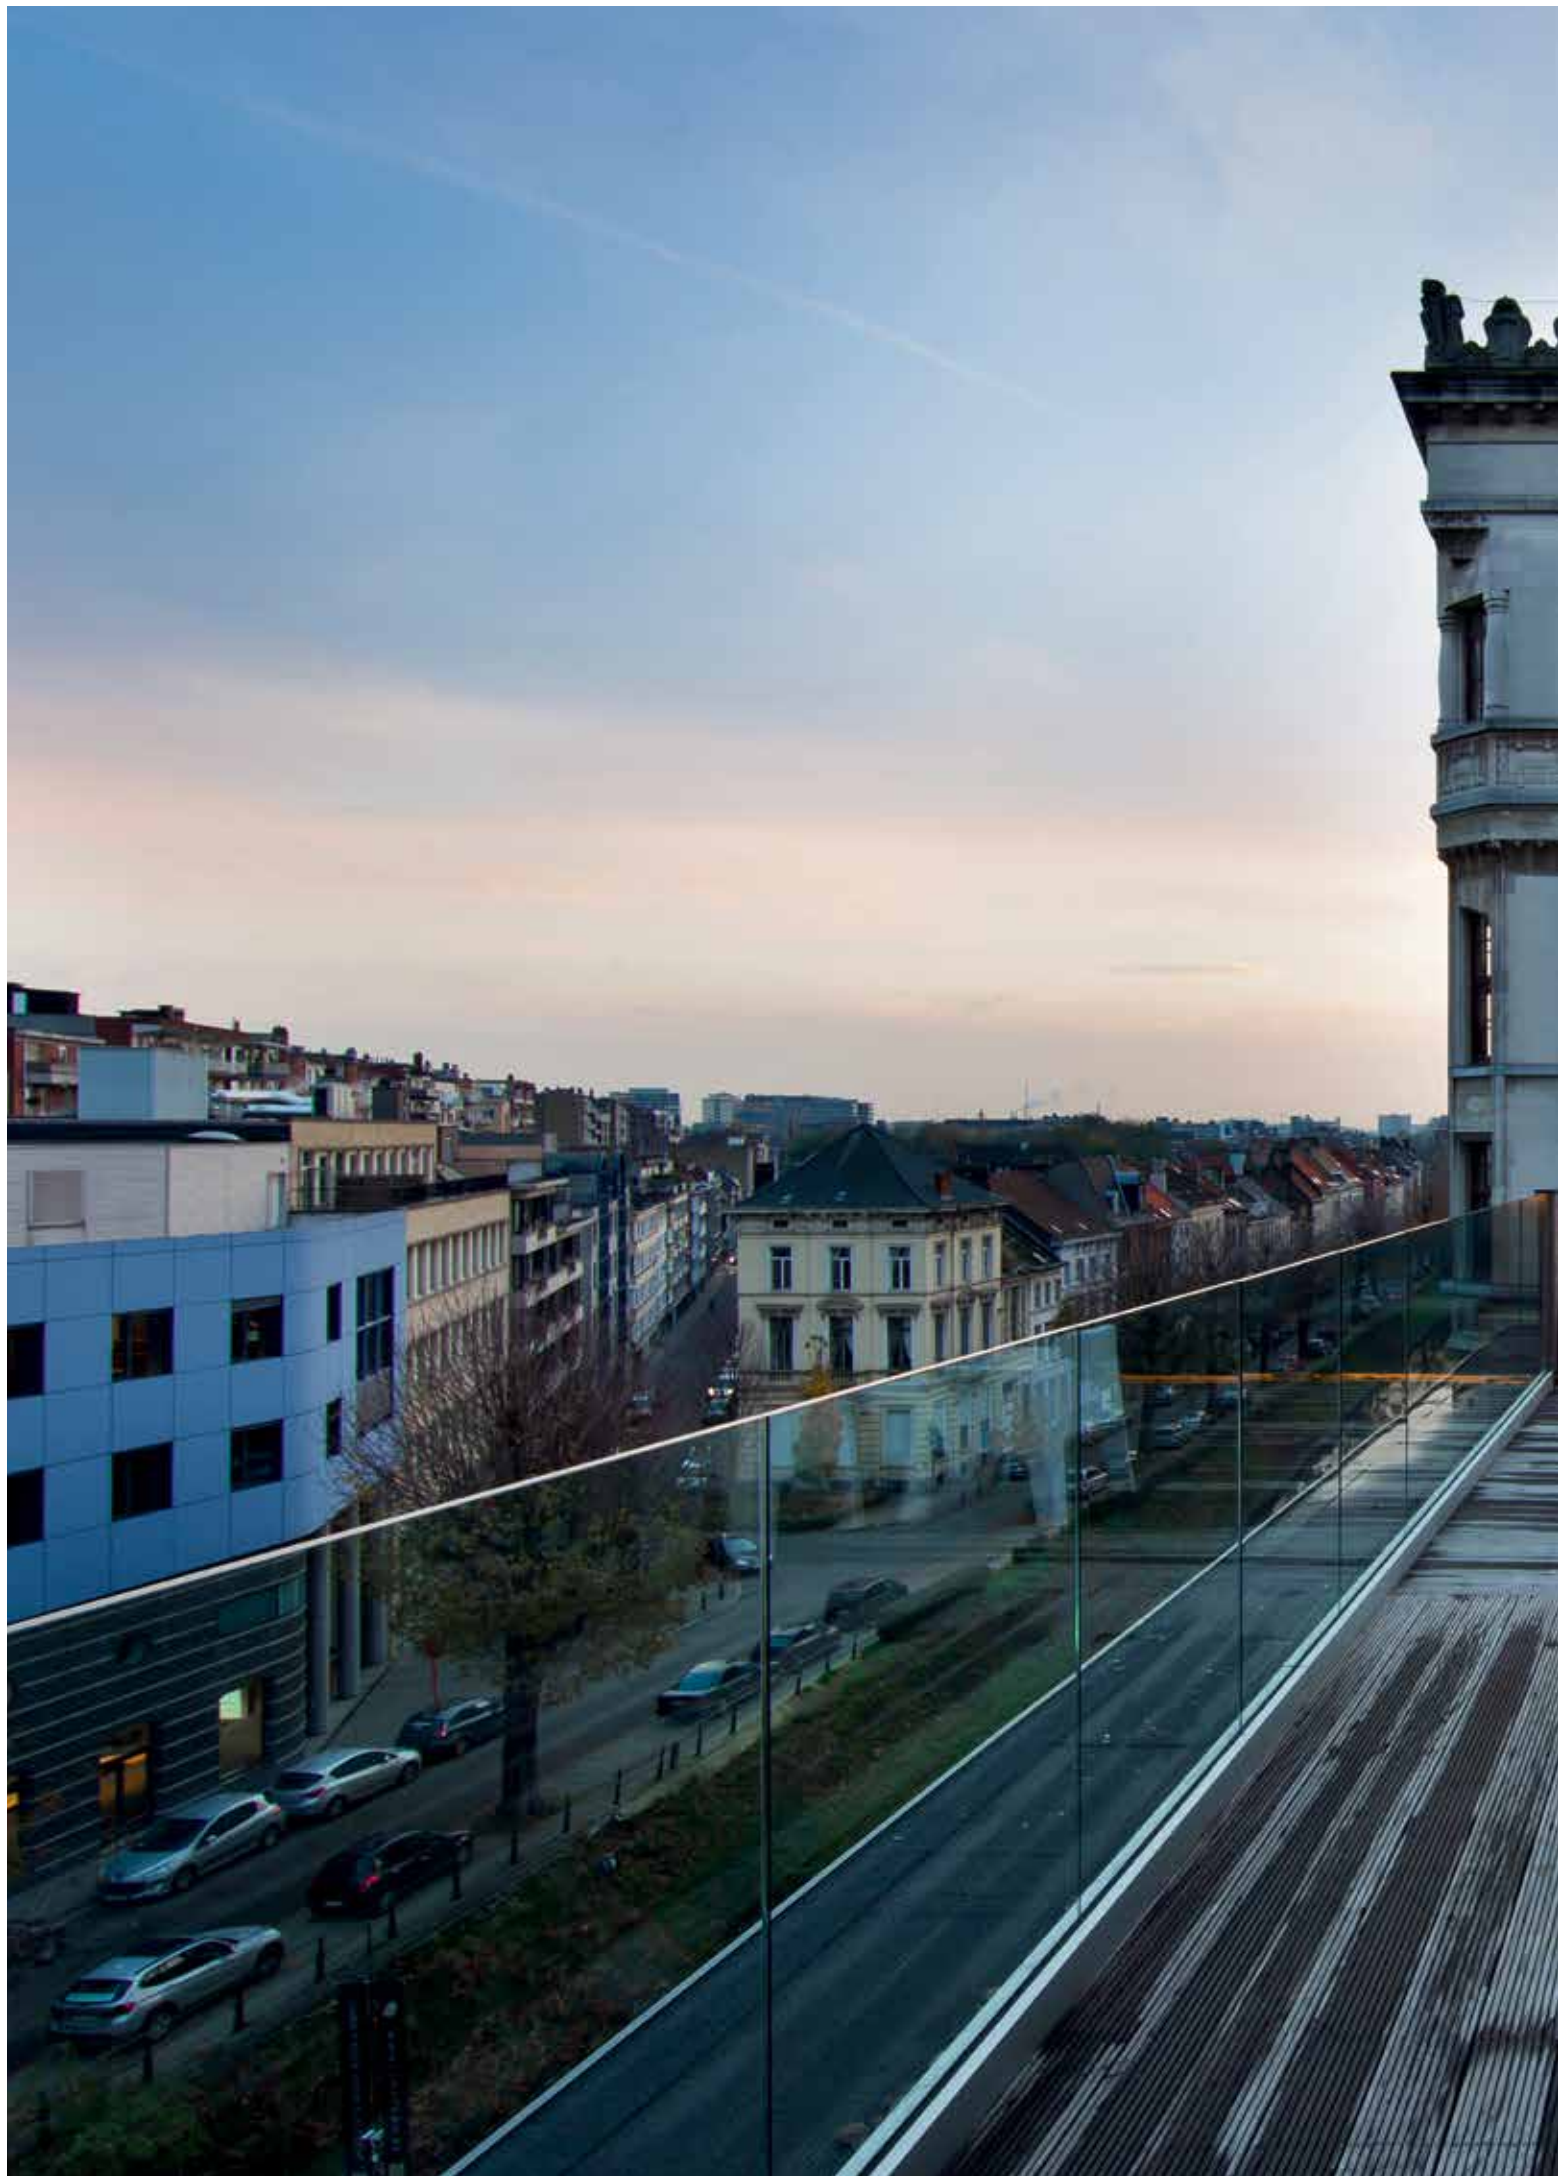








GALA L LED



CRI > 80

GALA L LED

3000
K


LED CLUSTER 6,3W / 840lm / 350mA

275 04 52 ◇
◇ = A / N / W2700
K

NEW

LED CLUSTER 6,3W / 840lm / 350mA

275 04 53 ◇
◇ = A / N / WNON ADJUSTABLE
100-240V / 50-60Hz



CRI > 90

GALA L OK LED

3000
K

2 x LED 4,7W / 542lm / 240mA

275 04 812 930 ◇
◇ = A / N / W2700
K

NEW

2 x LED 4,7W / 520lm / 240mA

275 04 812 920 ◇
◇ = A / N / WADJUSTABLE 20°
100-240V / 50-60Hz









WANT-IT

NEW

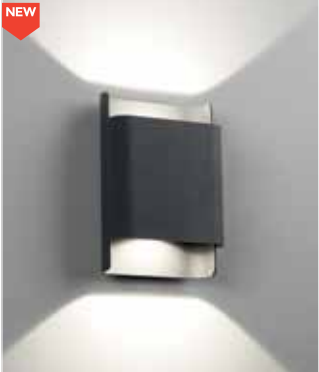

CRI > 90

WANT-IT S X

3000
K

2 x LED 4,7W / 542lm / 240mA

NON
DIM

275 14 812 930 ◇
◇ = A / N

2700
K

2 x LED 4,7W / 520lm / 240mA

NON
DIM

275 14 812 920 ◇
◇ = A / N


110-240V / 50-60Hz

CE 0,6 IP55





VISA X LED



CRI > 80

VISA X LED

3000
K


4 x LED 1,1W / 120lm / 350mA

275 06 24 ◇
◇ = G

120-240V / 50-60Hz

CE 1.2 IP55

TIGA LED



IK06

CRI > 90

TIGA LED

3000
K

LED 7,1W / 774lm / 350mA

FE

223 751 811 932 ED8 ◇
◇ = A / G / W

MAINS DIMMING (FE)
110-240V / 50-60Hz

CE 1.4 IP65

CRI > 90

TIGA LED BS

3000
K

LED 7,1W / 774lm / 350mA

FE

223 752 811 932 ED8 ◇
◇ = A / G / W

MAINS DIMMING (FE)
110-240V / 50-60Hz



CE 1.4 IP65







VISION OUT



CRI > 80

3000
K

VISION OUT LED

2 x LED 1,6W / 168lm/ 500mA

278 27 22 ◇
◇ = A / N

120-240V / 50-60Hz

□ CE 1,2 IP55

VISION S OUT LED

LED 1,6W / 168lm/ 500mA

278 26 22 ◇
◇ = A / N

120-240V / 50-60Hz


□ CE 1,1 IP55







VIKTOR



CRI > 80

VIKTOR

3000
K

LED CLUSTER 8,4W / 580lm / 350mA


223 80 12 ◇
◇ = A / N / W

220-240V / 50-60Hz

◇ CE 0.5 IP65



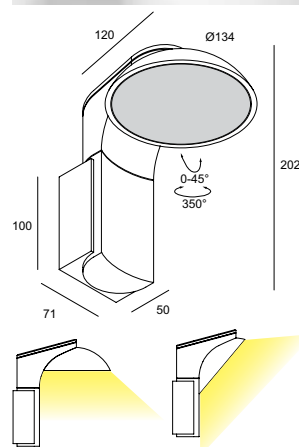

**TWEETER X W**

CRI > 90

TWEETER X W3000
K

LED 7,1W / 774lm / 350mA


206 40 811 930 ◇
◇ = NADJUSTABLE 0-45° / 350°
INCL. GLASS SBL
120-240V / 50-60Hz

IP54





NOX



CRI > 80

NOX LED

3000
K

LED 4,6W / 450lm / 500mA

225 11 4102 ◇
◇ = G

NON ADJUSTABLE
100-240V / 50-60Hz
◇ CE 0.8 IP55

NOX Hi

CRI
90
RA

QPAR51 max.35W



225 11 15 ◇
◇ = G

NON ADJUSTABLE
GU10 / 100-240V / 50-60Hz
◇ CE 0.8 IP55 0.5





ULTRA X LED



CRI > 90

ULTRA X LED

ULTRA X DOWN-UP LED

3000
K

LED 7,1W / 774lm / 350mA

2 x LED 7,1W / 774lm / 350mA

279 61 811 930 ◇
◇ = A / N / W

279 61 812 930 ◇
◇ = A / N / W

100-240V / 50-60Hz

220-240V / 50-60Hz

□ CE 0,6 IP55

◇ CE 0,9 IP55






ART1ST DESIGN STUDIO

CRI > 80

3000
K

REFL
FL
35°

DOX 100




DOX 100 LED

LED 9,5W / 830lm / 500mA

232 02 09 ◇
◇ = N

220-240V / 50-60Hz

◇ CE 0,9 IP65




DOX 100 DOWN-UP LED

2 x LED 9,5W / 830lm / 500mA

232 03 09 ◇
◇ = N

220-240V / 50Hz

◇ CE 1,3 IP65




DOX 100

TC-FSE max.9W

232 02 07 ◇
◇ = A

GX53 / 100-240V / 50-60Hz

◇ CE 0,7 IP65



DOX 100 DOWN-UP

2 x TC-FSE max.9W

232 03 07 ◇
◇ = A

GX53 / 100-240V / 50-60Hz

◇ CE 0,9 IP65



DOX 100 DOWN-UP LED



DOX 100 DOWN-UP



