

EXTERIOR FLOOR RECESSED

Floor recessed luminaires create a subtle and discrete, or a powerful light effect. Embedded in a well-planned lighting scheme, in-ground luminaires are perfect to highlight buildings, art, or natural elements such as trees, hedges or ponds. This collection offers a variety of lighting options, angles and effects.

www.deltalight.com/EFR



To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/21347811931 or www.deltalight.com/logic-r




INDEX

EXTERIOR FLOOR RECESSED

IP67



LED S C
EXT 863



LOGIC 60 R
EXT 867




LED S GO IN
EXT 863



LOGIC R WALLWASH
EXT 870



TACTIC 2
EXT 865




LOGIC R
EXT 871



LOGIC 60 R WALLWASH
EXT 866



LOGIC S
EXT 871



LOGIC 60 R SP
EXT 866



LOGIC R OK
EXT 875




LOGIC 60 R MOON
EXT 867




LOGIC F
EXT 879

LEDS C	EXT 863
LEDS GO IN	EXT 863
LOGIC 60 R	EXT 867
LOGIC 60 R MOON	EXT 867
LOGIC 60 R SP	EXT 866
LOGIC 60 R WALLWASH	EXT 866
LOGIC F	EXT 879
LOGIC R	EXT 871
LOGIC R OK	EXT 875
LOGIC R WALLWASH	EXT 870
LOGIC S	EXT 871
TACTIC 2	EXT 865




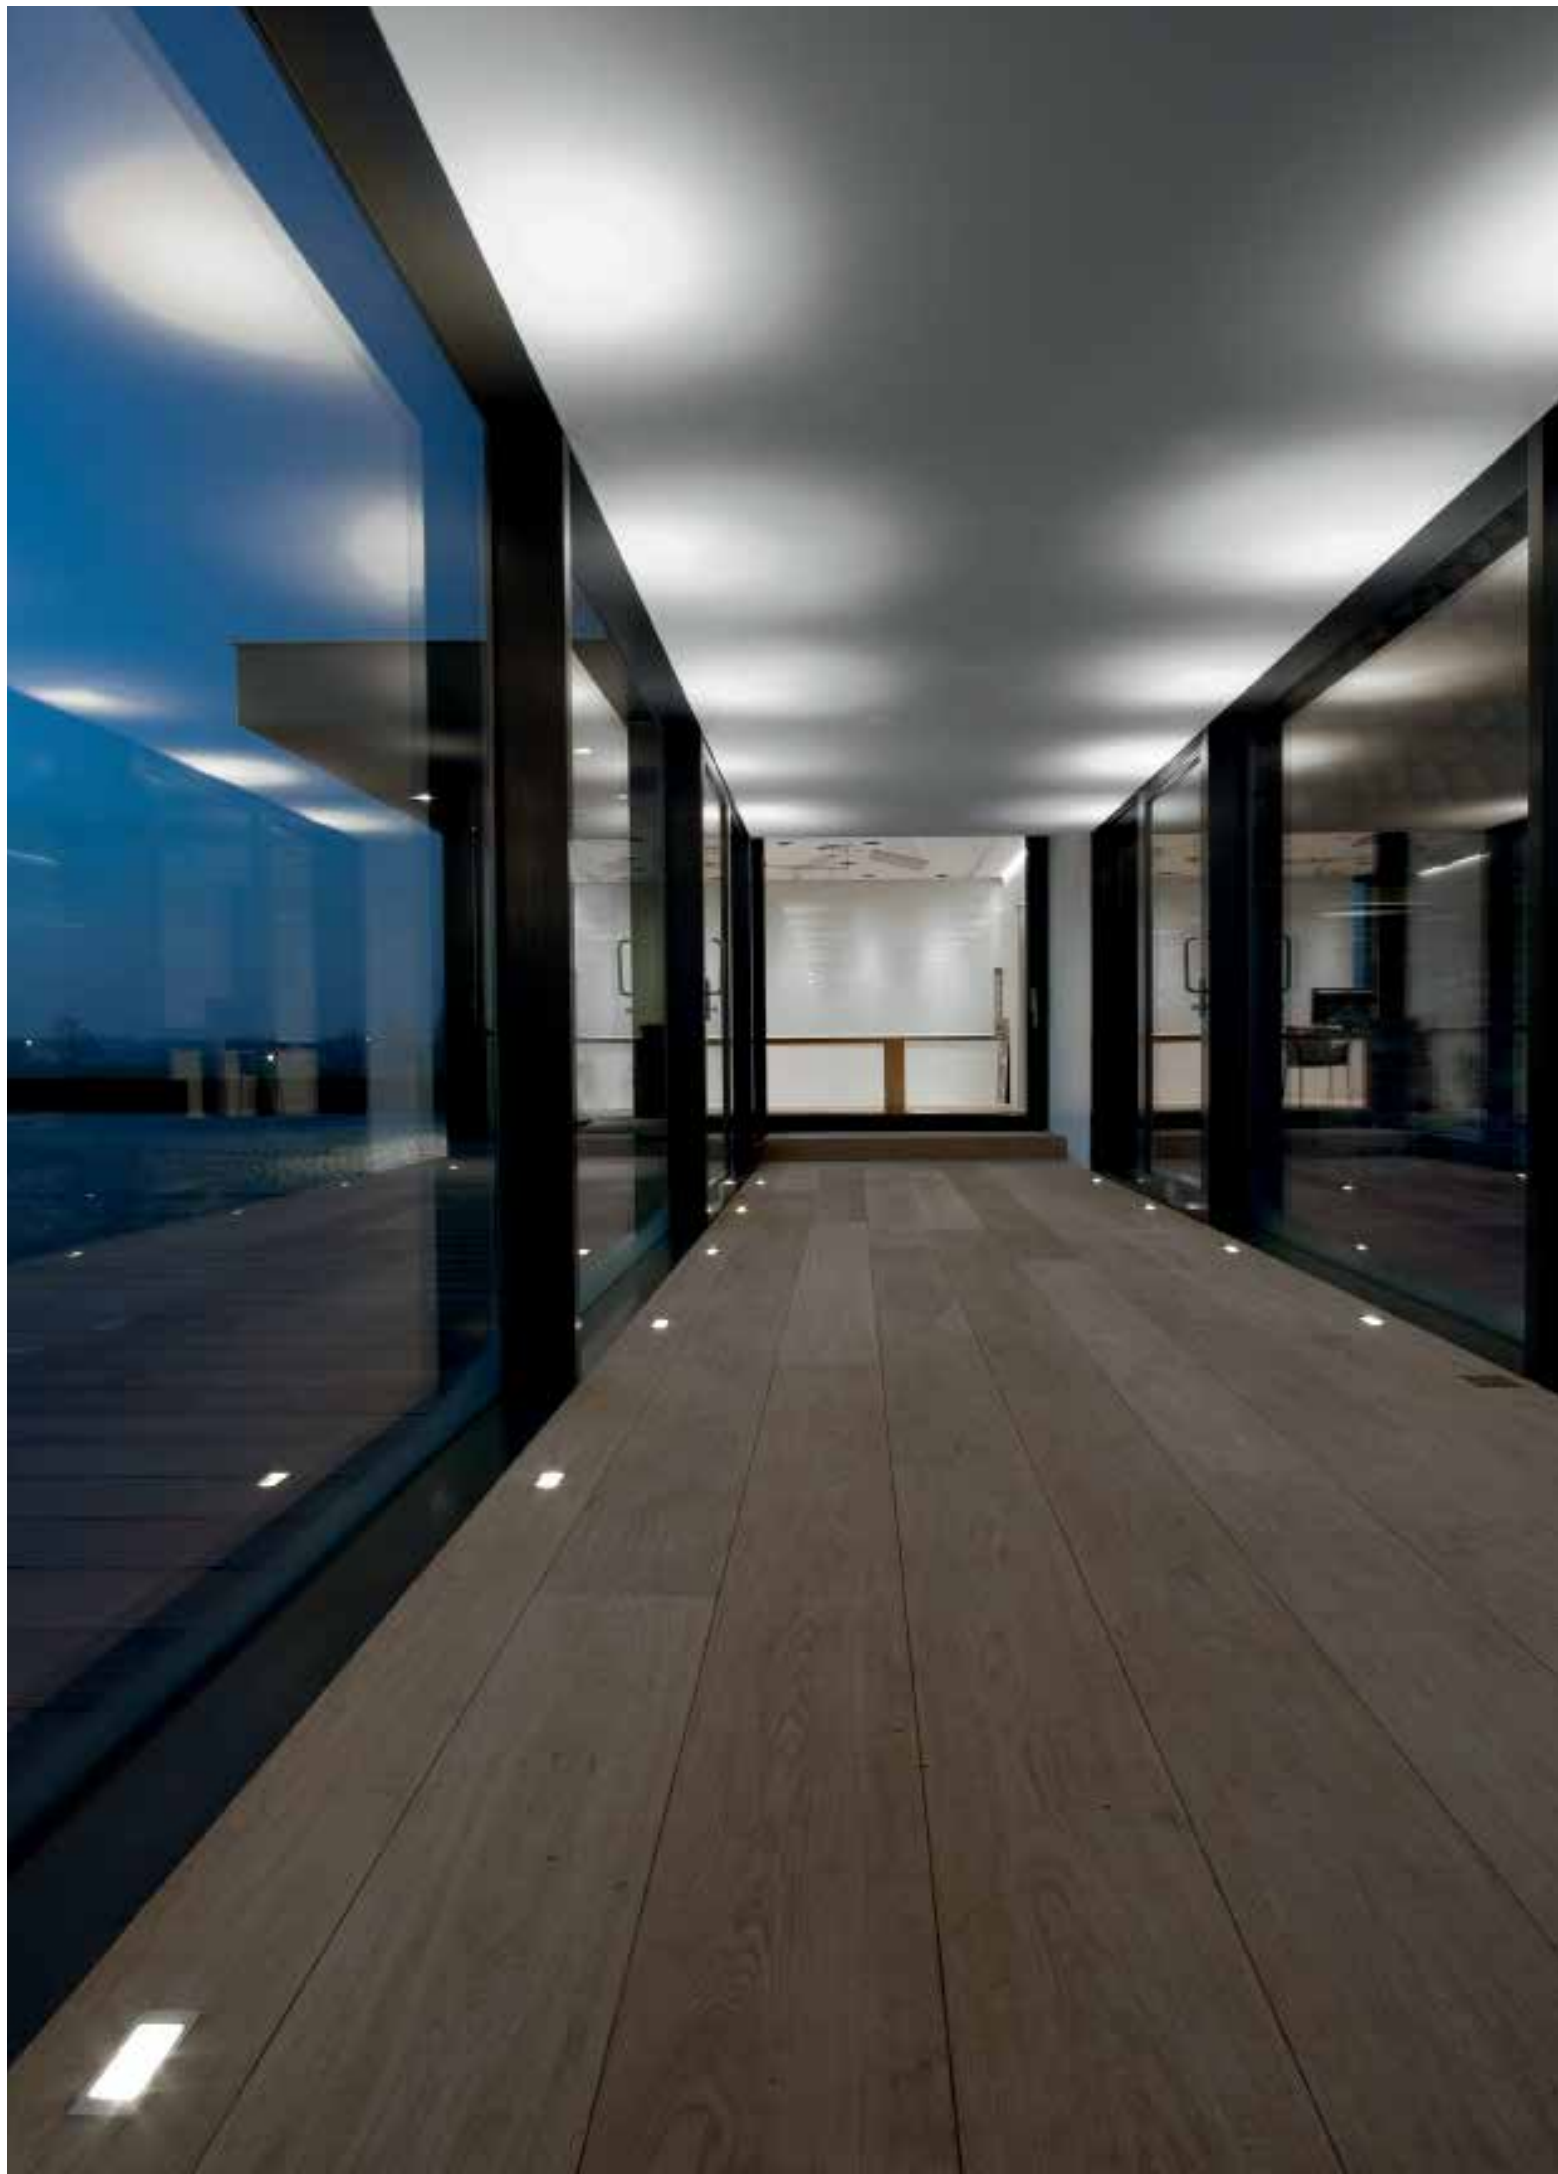





61 x 100

NEW



61 x 100

NEW

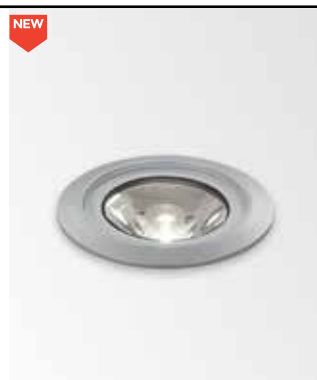

61 x 100

CRI > 80

LOGIC 60 R WALLWASH

3000 K


LED 4W / 335lm / 24V-DC



213 45 212 ◇
◇ = ANO



213 45 2125 ◇
◇ = ANO



LOGIC 60 R WALLWASH SBL LOGIC 60 R WALLWASH

INCL. 1 x CABLE H05 RN-F 2 x 1mm² 0,5m
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm

IP67

OPTIONS

LED POWER SUPPLY 24V-DC
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LOGIC 60 BOX R

LOGIC 60 R SP

LED [F] 2W / 208lm / 700mA
LED [F] 3,2W / 295lm / 1050mA

213 45 15 ◇
◇ = ANO

INCL. 1 x CABLE H05 RN-F 2 x 1mm² 0,5m
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm

IP67

OPTIONS

LED POWER SUPPLY 700-1050mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LOGIC 60 BOX R

LOGIC 60 R A SP

LED [F] 2W / 208lm / 700mA
LED [F] 3,2W / 295lm / 1050mA

213 46 15 ◇
◇ = ANO / B (BLACK ANODISED)

INCL. 1 x CABLE H05 RN-F 2 x 1mm² 0,5m
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm

IP67

OPTIONS

LED POWER SUPPLY 700-1050mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LOGIC 60 BOX R

FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION



LOGIC 60 BOX R
213 19 10

170 x 120 x 100

175 x 125 x 105

CBOX
216 12 00

140 x 140 x 173

142 x 142 x 300

IP68 CONNECTION KIT
216 12 01

95 x 45 x 25



IP68 CONNECTOR 3P
216 12 02

Ø 23 x 68



CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



LED POWER SUPPLY
24V-DC / 20W
300 89 24 20

146 x 55 x 19

LED POWER SUPPLY
24V-DC / 40W
300 89 24 40

242 x 46 x 36


LED POWER SUPPLY
24V-DC / 60W
300 89 24 60

215 x 44 x 31




LOGIC 60 R A SP


LOGIC 60




61 x 100



61 x 100



61 x 100



61 x 100

CRI > 90

LOGIC 60 R MOON

LOGIC 60 R A MOON

LOGIC 60 R

LOGIC 60 R A



LED [H] 7,1W / 774lm / 350mA

LED [H] 7,1W / 774lm / 350mA

LED [H] 7,1W / 774lm / 350mA

LED [H] 7,1W / 774lm / 350mA

213 45 10 811 932 ◇
◇ = ANO

213 46 10 811 932 ◇
◇ = ANO / B (BLACK ANODISED)

213 45 811 932 ◇
◇ = ANO

213 46 811 932 ◇
◇ = ANO / B (BLACK ANODISED)

INCL.1 x CABLE H05 RN-F 2 x 1mm² 0,5m
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm

INCL.1 x CABLE H05 RN-F 2 x 1mm² 0,5m
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm

INCL.1 x CABLE H05 RN-F 2 x 1mm² 0,5m
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm

INCL.1 x CABLE H05 RN-F 2 x 1mm² 0,5m
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm

CE 0.6 IP67

CE 0.6 IP67

CE 0.6 IP67

CE 0.6 IP67

OPTIONS

LED POWER SUPPLY 350mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LOGIC 60 BOX R

OPTIONS


LED POWER SUPPLY 350mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LOGIC 60 BOX R

OPTIONS

LED POWER SUPPLY 350mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LOGIC 60 BOX R

OPTIONS

LED POWER SUPPLY 350mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LOGIC 60 BOX R

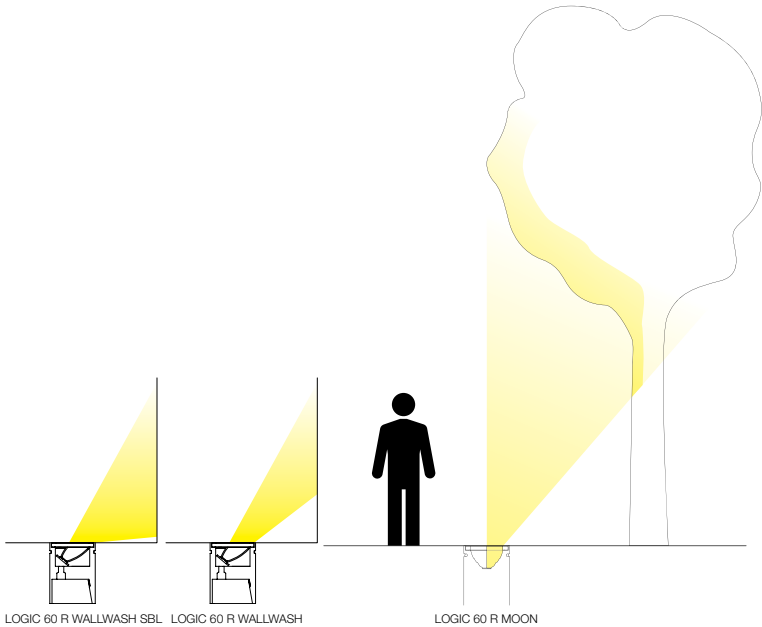





OPTIONS

INSTALLATION



GENIE BOX 80 S / 90 S 220 x 155 x 150 224 x 159 x 155
213 19 08

GENIE BOX 90 R 220 x 155 x 146 224 x 159 x 150
213 19 09


CBOX 140 x 140 x 173 142 x 142 x 300
216 12 00



LOGIC R WALLWASH




LOGIC R WALLWASH SBL



LOGIC R WALLWASH

LOGIC R WALLWASH SBL



93 x 125

CRI > 90

LOGIC R WALLWASH

3000
K

LED [H] 7,1W / 774lm / 350mA



213 473 811 930 ◇
◇ = ANO



213 474 811 930 ◇
◇ = ANO

INCL. CABLE H05 RN-F 2 x 1mm² 0,5m
INCL. IP68 CONNECTOR 3P
100-240V / 50-60Hz
IEC 60598-2-13: max. 150kg 25N/cm²
ESG 5mm

CE 1.0 IP67

OPTIONS
CBOX
GENIE BOX 90 R

LOGIC

93 x 125 LOGIC R A WALLWASH LED [H] 7,1W / 774lm / 350mA			
93 x 125 LOGIC R LED [H] 7,1W / 774lm / 350mA 213 47 811 931 $\diamond$ $\diamond$ = ANO 213 47 811 932 $\diamond$ $\diamond$ = ANO 213 47 811 933 $\diamond$ $\diamond$ = ANO			
93 x 125 LOGIC R A LED [H] 7,1W / 774lm / 350mA 213 48 811 931 $\diamond$ $\diamond$ = ANO / B (BLACK ANODISED) 213 48 811 932 $\diamond$ $\diamond$ = ANO / B (BLACK ANODISED) 213 48 811 933 $\diamond$ $\diamond$ = ANO / B (BLACK ANODISED)			
112 x 112 x 125 LOGIC S LED [H] 7,1W / 774lm / 350mA 213 49 811 931 $\diamond$ $\diamond$ = ANO 213 49 811 932 $\diamond$ $\diamond$ = ANO 213 49 811 933 $\diamond$ $\diamond$ = ANO			
INCL.CABLE H05 RN-F 2 x 1mm² 0,5m INCL.IP68 CONNECTOR 3P 100-240V / 50-60Hz IEC 60598-2-13: max.150kg 25N/cm² ESG 5mm CE 1,0 IP67 OPTIONS CBOX GENIE BOX 90 R			
INCL.CABLE H05 RN-F 2 x 1mm² 0,5m INCL.IP68 CONNECTOR 3P 100-240V / 50-60Hz IEC 60598-2-13: max.150kg 25N/cm² ESG 5mm CE 1,0 IP67 OPTIONS CBOX GENIE BOX 90 R			
INCL.CABLE H05 RN-F 2 x 1mm² 0,5m INCL.IP68 CONNECTOR 3P 100-240V / 50-60Hz IEC 60598-2-13: max.150kg 25N/cm² ESG 5mm CE 1,0 IP67 OPTIONS CBOX GENIE BOX 90 R			
INCL.CABLE H05 RN-F 2 x 1mm² 0,5m INCL.IP68 CONNECTOR 3P 100-240V / 50-60Hz IEC 60598-2-13: max.150kg 25N/cm² ESG 5mm CE 1,1 IP67 OPTIONS CBOX GENIE BOX 80 S / 90 S			




LOGIC S - IP68 CONNECTOR 3P



STUDIO 2 ARCHITECTS



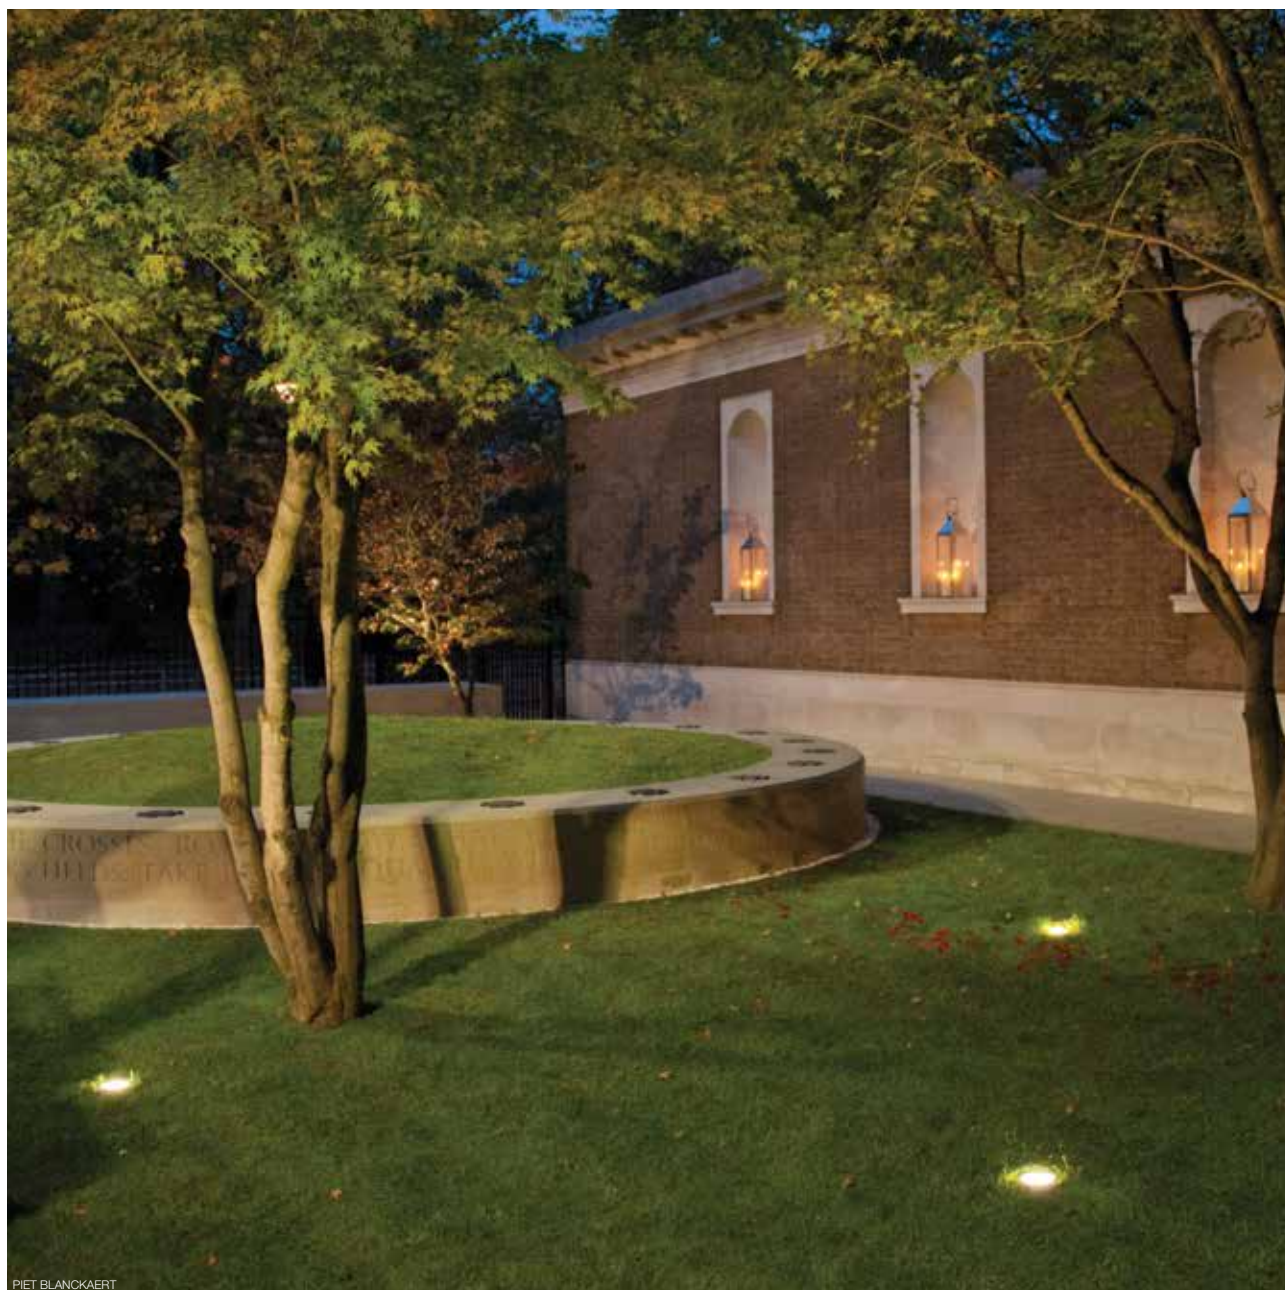

PIET BLANCKAERT

FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

LOGIC R OK BOX

213 50 10

285 x 225 x 195

290 x 230 x 215

IP68 CONNECTION KIT

216 12 01

95 x 45 x 25

CONTROL GEAR

LED POWER SUPPLY

ALL INFO ON FOLD-OUT COVER



LOGIC R OK BOX



ADJUSTABLE 0°-30° / 355°



LOGIC R OK - IP68 CONNECTION KIT
MOISTURE LOCK

NEW

CTRL DELTA R

LOGIC R OK

KIT x 195

CRI > 90

LOGIC R OK

3000 K

LED [F] 2W / 172lm / 700mA
LED [F] 3,2W / 243lm / 1050mA

LENS SP 6°

213 502 931 ◇
◇ = ANO

ADJUSTABLE 0°-30° / 355°
INCL.CABLE H05 RN-F 2 x 1mm² 0,5m
INCL.IP68 CONNECTOR 3P
IEC 60598-2-13: max.150kg 25N/cm²
ESG 5mm

CE 1,1 IP67

OPTIONS
LED POWER SUPPLY 700-1050mA-DC / DIM
LOGIC R OK BOX R
IP68 CONNECTION KIT

3000 K

LED [H] 7,1W / 774lm / 350mA
LED [H] 10,4W / 1075lm / 500mA

REFL FL 30°

213 501 811 932 ◇
◇ = ANO


ADJUSTABLE 0°-30° / 355°
INCL.CABLE H05 RN-F 2 x 1mm² 0,5m
INCL.IP68 CONNECTOR 3P
IEC 60598-2-13: max.150kg 25N/cm²
ESG 5mm

CE 1,1 IP67



OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM
LOGIC R OK BOX
IP68 CONNECTION KIT





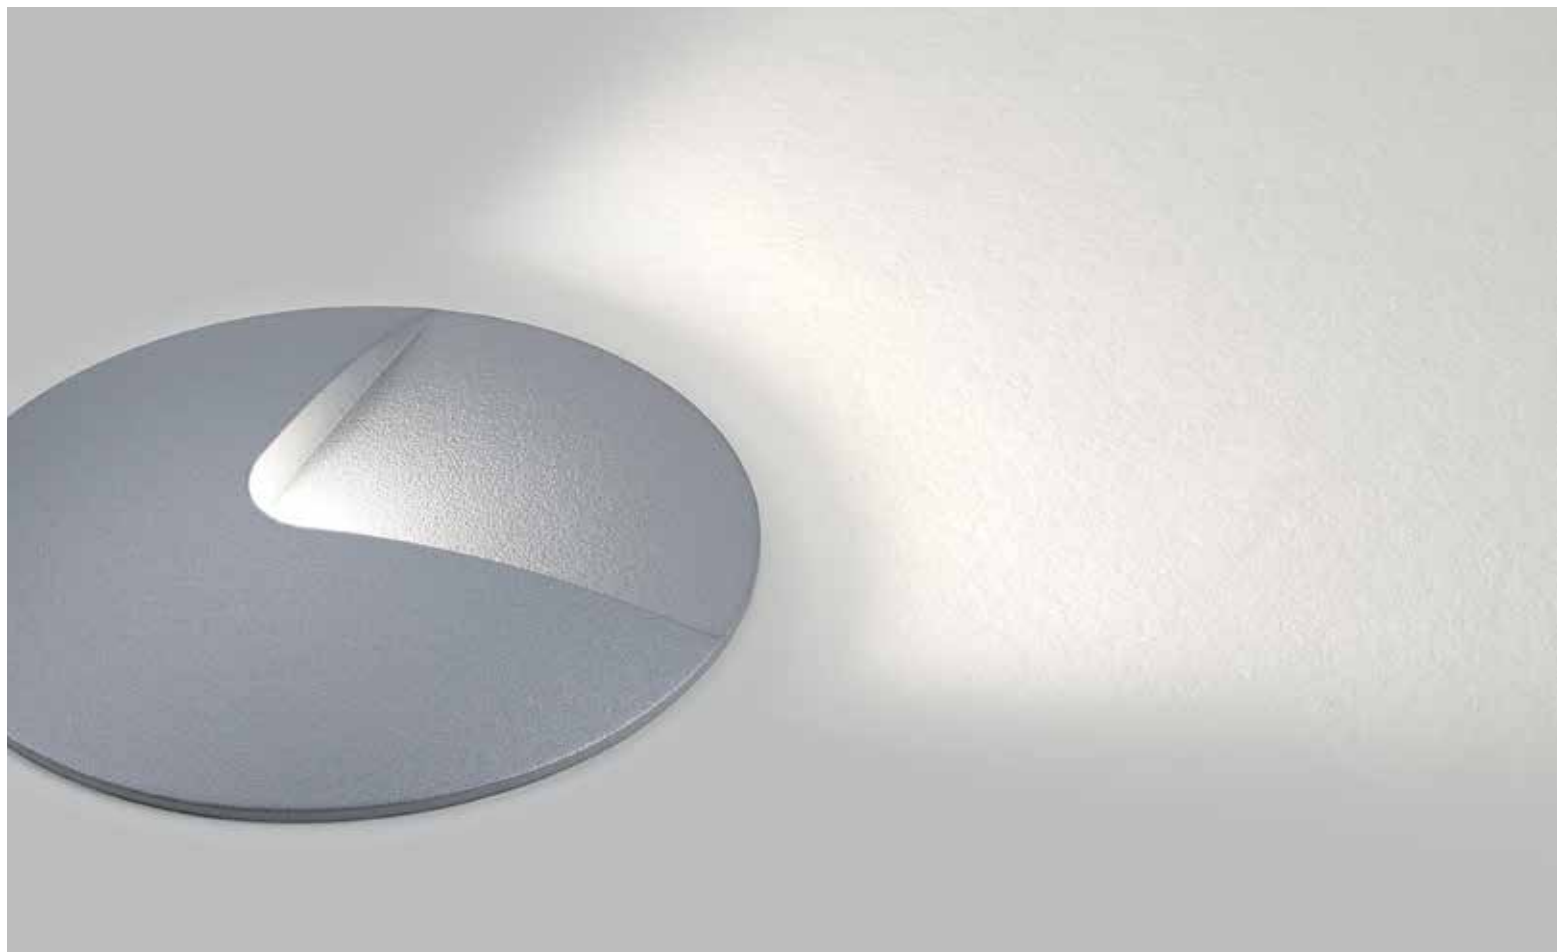

FULL INFO TECHNICAL CHAPTER			OPTIONS	
INSTALLATION				
GENIE BOX 90 R	220 x 155 x 146	224 x 159 x 150		
213 19 09				
CBOX	140 x 140 x 173	142 x 142 x 300		
216 12 00				
CONTROL GEAR				
LED POWER SUPPLY	146 x 55 x 19			
24V-DC / 20W				
300 89 24 20				

		LOGIC F	
			
			
 93 x 40		 93 x 40	
CRI > 80		LOGIC F1	
 3000 K		LOGIC F2	
LED 0,6W / 40lm / 24V-DC		2 x LED 0,6W / 40lm / 24V-DC	
213 47 112 ◇		213 47 122 ◇	
◇ = A		◇ = A	
max.600kg		max.600kg	
   IP67		   IP67	
OPTIONS GENIE BOX 90R CBOX LED POWER SUPPLY 24V-DC		OPTIONS GENIE BOX 90R CBOX LED POWER SUPPLY 24V-DC	