

EXTERIOR FLOOR SURFACE

The range of exterior floor fixtures constitutes the ideal directional or mood lighting. Position the fixtures at regular intervals to light garden paths, or use them throughout your landscape design for additional style and atmosphere. As in the wall surface range, several bollards combine led with a lens. The light effect is reinforced, resulting in maximum beam spread and powerful play of light. Outdoor fixtures using a lens provide a unique effect when used on their own, but can also add an attractive and artistic touch when used in a composition or well planned set-up. The striking light silhouettes enable you to play with light on wall, floor or ceiling.

www.deltalight.com/EFS



To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url. E.g. www.deltalight.com/22212312 or www.deltalight.com/bazil



INDEX

EXTERIOR FLOOR SURFACE



TWEETER X P
EXT 885



KIX M
EXT 894



AULA
EXT 905



OBLIX
EXT 919



MR. SENIOR
EXT 935



BAZIL
EXT 887



KIX M PIN
EXT 894



TOURNESOL
EXT 907



WALKER
EXT 923




VISIONAIR
EXT 937



SPYKER
EXT 889



KIX
EXT 895



NEW
BUTLER P
EXT 909



STRIPER
EXT 925



NEW
STIG
EXT 891



KIX PIN
EXT 895




NEW
MONTUR R P
EXT 911



MONOPOL LED
EXT 929



KIX S
EXT 893



INDUSTRIAL S
EXT 901



MONTUR S P
EXT 915



BOTANIC
EXT 933



KIX S PIN
EXT 893



NEW
STIEVE
EXT 903



MONTUR L P
EXT 915



MR. JUNIOR X
EXT 935

AULA	EXT 905
BAZIL	EXT 887
BOTANIC	EXT 933
BUTLER P	EXT 909
INDUSTRIAL S	EXT 901
KIX	EXT 895
KIX M	EXT 894
KIX M PIN	EXT 894
KIX PIN	EXT 895
KIX S	EXT 893
KIX S PIN	EXT 893
MONOPOL LED	EXT 929
MONTUR L P	EXT 915
MONTUR R P	EXT 911
MONTUR S P	EXT 915
MR. JUNIOR X	EXT 935
MR. SENIOR	EXT 935
OBLIX	EXT 919
SPYKER	EXT 889
STIEVE	EXT 903
STIG	EXT 891
STRIPER	EXT 925
TOURNESOL	EXT 907
TWEETER X P	EXT 885
VISIONAIR	EXT 937
WALKER	EXT 923



WWW.DELTALIGHT.COM/POLESANOBYDEANSKIRA
 FULL PRODUCT LAUNCH - AUTUMN 2017




WWW.DNA-ARCHITECTEN.BE

FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION		
CBOX 216 12 00	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT 216 12 01	95 x 45 x 25	
IP68 CONNECTOR 3P 216 12 02	Ø23 x 68	
PIN 11 229 01 11	41 x 79 x 403	

TWEETER X P

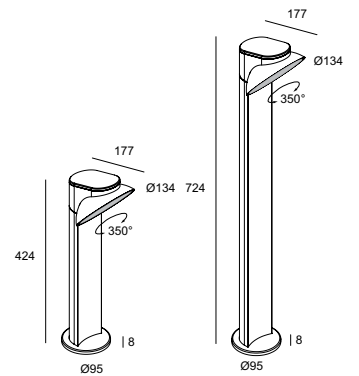

CRI > 90

TWEETER X P

3000
K

LED 7,1W / 774lm / 350mA


424mm **206 43 811 930** ◊
◊ = N

724mm **206 46 811 930** ◊
◊ = N

ADJUSTABLE
INCL. GLASS SBL
120-240V / 50-60Hz




IP54

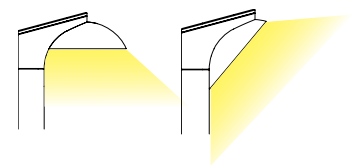
OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
PIN 11





FULL INFO TECHNICAL CHAPTER **OPTIONS**

INSTALLATION		
CBOX 216 12 00	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT 216 12 01	95 x 45 x 25	
IP68 CONNECTOR 3P 216 12 02	Ø23 x 68	
PIN 3 229 01 03	Ø108 x 404	

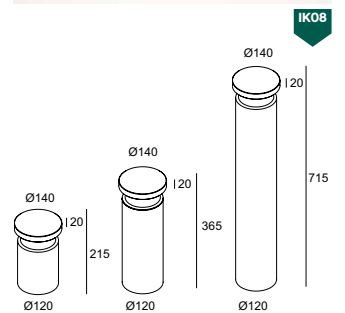

CRI > 80

3000 K

BAZIL

LED CLUSTER 11W / 735lm / 500mA

215mm **222 121 12** ◇
 ◇ = A-ANO / N-ANO / N-GOLD

LED CLUSTER 15W / 1020lm / 700mA

365mm **222 123 12** ◇
 ◇ = A-ANO / N-ANO / N-GOLD


715mm **222 126 12** ◇
 ◇ = A-ANO / N-ANO / N-GOLD

220-240V / 50-60Hz

◇ CE IP55

OPTIONS

- CBOX
- IP68 CONNECTION KIT
- IP68 CONNECTOR 3P
- PIN 3

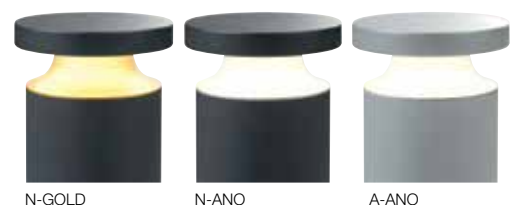

N-GOLD

N-ANO

A-ANO




VEERLE SMET


FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

CBOX 216 12 00	140 x 140 x 173	142 x 142 x 300	
IP68 CONNECTION KIT 216 12 01	95 x 45 x 25		
IP68 CONNECTOR 3P 216 12 02	Ø 23 x 68		
PIN 11 229 01 11	41 x 79 x 403		

SPYKER

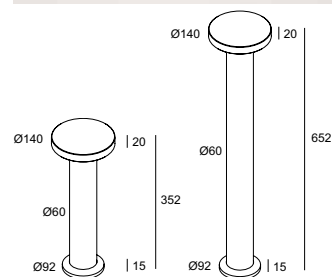

CRI > 80

SPYKER 140

3000 K

LED CLUSTER 15W / 1020lm / 700mA

352mm **222 613 12** ◇
◇ = A / N

652mm **222 616 12** ◇
◇ = A / N

220-240V / 50-60Hz

◇ CE IP55

OPTIONS

- CBOX
- IP68 CONNECTION KIT
- IP68 CONNECTOR 3P
- PIN 11





FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION



CBOX 216 12 00 140 x 140 x 173 142 x 142 x 300

IP68 CONNECTION KIT 216 12 01 95 x 45 x 25



IP68 CONNECTOR 3P 216 12 02 Ø23 x 68



PIN 16 229 01 16



CONTROL GEAR



LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



STIG N + PIN 16



STIG

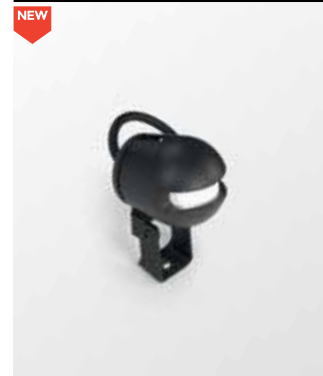

CRI > 80

STIG

3000 K

LED [E] 6W / 570lm / 500mA
LED [E] 8,7W / 723lm / 700mA

232 20 83 ◇
◇ = N

ADJUSTABLE
INCL. 1 x CABLE H05 RN-F 2 x 1mm² 2m

◇ CE [0,5] IP65

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LED POWER SUPPLY 500-700mA-DC / DIM
PIN 16



FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION



CBOX 140 x 140 x 173 142 x 142 x 300
216 12 00

IP68 CONNECTION KIT 95 x 45 x 25
216 12 01



IP68 CONNECTOR 3P Ø 23 x 68
216 12 02





CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



KIX S



CRI > 80

3000 K



KIX S

LED [A] 1,1W / 120lm / 350mA
 LED [A] 1,6W / 168lm / 500mA
 LED [A] 2,3W / 223lm / 700mA

232 08 831 ◊
 ◊ = A / N

ADJUSTABLE
 INCL. 1 x CABLE H05 RN-F 2 x 1mm² 2m

◊ ◊ **CE** **0,3** IP65

OPTIONS
 CBOX
 IP68 CONNECTION KIT
 IP68 CONNECTOR 3P
 LED POWER SUPPLY 350-700mA-DC / DIM

KIX S PIN

LED [A] 1,1W / 120lm / 350mA
 LED [A] 1,6W / 168lm / 500mA
 LED [A] 2,3W / 223lm / 700mA

232 09 831 ◊
 ◊ = A / N

ADJUSTABLE
 INCL. 1 x CABLE H05 RN-F 2 x 1mm² 2m

◊ ◊ **CE** **0,3** IP65

OPTIONS
 CBOX
 IP68 CONNECTION KIT
 IP68 CONNECTOR 3P
 LED POWER SUPPLY 350-700mA-DC / DIM

FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION



CBOX 140 x 140 x 173 142 x 142 x 300

IP68 CONNECTION KIT 95 x 45 x 25



IP68 CONNECTOR 3P Ø 23 x 68



FULL INFO TECHNICAL CHAPTER

ACCESSORIES

KAP KIX ◇
232 10 00 ◇
◇ = N



HONEYCOMB KIX ◇
232 10 03 ◇
◇ = N





CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



KIX +
HONEYCOMB KIX +
KAP KIX

KIX M

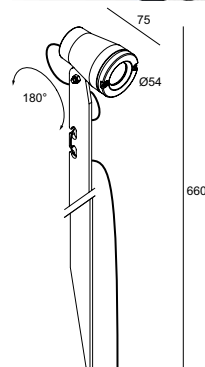

CRI > 90

KIX M

KIX M PIN



3000
K

LED 6,4W / 587lm / 350mA

LED [D] 6,4W / 587lm / 350mA



232 12 933 ◇
◇ = A / N

232 13 933 ◇
◇ = A / N

ADJUSTABLE
INCL. 1 x KAP STRIPER B (REMOVABLE)
100-240V / 50-60Hz

CE 0,9 IP65

ADJUSTABLE
INCL. 1 x CABLE H05 RN-F 2 x 1mm² 2m
INCL. 1 x KAP STRIPER B (REMOVABLE)

CE 0,6 IP55

OPTIONS

CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LED POWER SUPPLY 350mA-DC / DIM

CRI > 80

3000
K

LED [B] 3,3W / 307lm / 1050mA



232 13 831 ◇
◇ = A / N


ADJUSTABLE
INCL. 1 x CABLE H05 RN-F 2 x 1mm² 2m
INCL. 1 x KAP STRIPER B (REMOVABLE)

CE 0,6 IP55

OPTIONS

CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LED POWER SUPPLY 1050mA-DC / DIM

KIX



CRI > 90

KIX SSP



3000 K


LED [F] 3,2W / 243lm / 1050mA
LED [F] 4,3W / 279lm / 1400mA



232 10 939 ◊
◊ = A / N

ADJUSTABLE
◊ CE [0,9] IP65

OPTIONS
LED POWER SUPPLY 1050-1400mA-DC / DIM
ACCESSORIES
KAP KIX
HONEYCOMB KIX

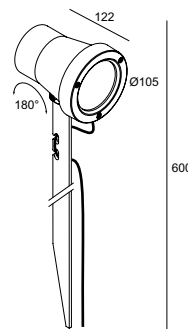

CRI > 90

KIX SSP PIN



3000 K

LED [F] 3,2W / 243lm / 1050mA
LED [F] 4,3W / 279lm / 1400mA



232 11 939 ◊
◊ = A / N

ADJUSTABLE
◊ CE [0,9] IP65

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LED POWER SUPPLY 1050-1400mA-DC / DIM
ACCESSORIES
KAP KIX
HONEYCOMB KIX

CRI > 90

KIX

3000 K

LED 7,1W / 774lm / 350mA



232 10 811 931 ◊
◊ = A / N



232 10 811 932 ◊
◊ = A / N



232 10 811 933 ◊
◊ = A / N



232 10 811 930 ◊
◊ = A / N

ADJUSTABLE
100-240V / 50-60Hz
◊ CE [0,9] IP65

ACCESSORIES
KAP KIX
HONEYCOMB KIX

CRI > 90

KIX PIN

3000 K

LED 7,1W / 774lm / 350mA



232 11 811 931 ◊
◊ = A / N



232 11 811 932 ◊
◊ = A / N



232 11 811 933 ◊
◊ = A / N



232 11 811 930 ◊
◊ = A / N

ADJUSTABLE
INCL. 1 x CABLE H05 RN-F 2 x 1mm² 2m
100-240V / 50-60Hz
◊ CE [1,2] IP65

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
ACCESSORIES
KAP KIX
HONEYCOMB KIX

CRI > 90

KIX HP



3000 K

LED [J] 16,8W / 1995lm / 500mA



232 10 21 931 ◊
◊ = A / N



232 10 21 932 ◊
◊ = A / N



232 10 21 933 ◊
◊ = A / N

ADJUSTABLE
EXCL. LED POWER SUPPLY 500mA-DC
◊ CE [0,7] IP65

OPTIONS
LED POWER SUPPLY 500mA-DC / DIM
ACCESSORIES
KAP KIX
HONEYCOMB KIX

CRI > 90

KIX HP PIN



3000 K

LED [J] 16,8W / 1995lm / 500mA



232 11 21 931 ◊
◊ = A / N



232 11 21 932 ◊
◊ = A / N



232 11 21 933 ◊
◊ = A / N

ADJUSTABLE
INCL. 1 x CABLE H05 RN-F 2 x 1mm² 2m
EXCL. LED POWER SUPPLY 500mA-DC
◊ CE [1,0] IP65

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LED POWER SUPPLY 500mA-DC / DIM
ACCESSORIES
KAP KIX
HONEYCOMB KIX



GOVAERT & VANHOUTTE ARCHITECTS



BECKERS NOYEZ ARCHITECTEN





WAELES INTERIEUR



FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION



CBOX 216 12 00	140 x 140 x 173	142 x 142 x 300	
CBOX 350mA / 10W 216 14 35	140 x 140 x 173	142 x 142 x 300	
IP68 CONNECTION KIT 216 12 01	95 x 45 x 25		
IP68 CONNECTOR 3P 216 12 02	Ø 23 x 68		
PIN 7 229 01 07	Ø4,5 x 315		

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



INDUSTRIAL S

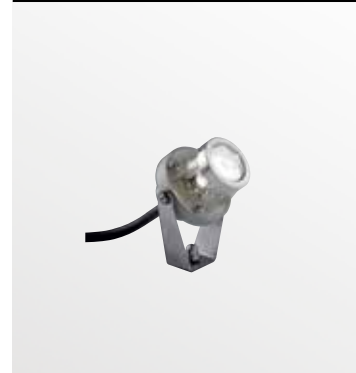

CRI > 80

INDUSTRIAL S

4000
K

LED [A] 1,1W / 130lm / 350mA
LED [A] 1,6W / 181lm / 500mA
LED [A] 2,3W / 242lm / 700mA

LENS
SP
10°

306 01 04 ◊
◊ = A

3000
K

LED [A] 1,1W / 120lm / 350mA
LED [A] 1,6W / 168lm / 500mA
LED [A] 2,3W / 223lm / 700mA

LENS
SP
10°

306 01 02 ◊
◊ = A

INCL. 1 x CABLE HO5 RN-F 2 x 0,75mm² 2m

CE 0,2 IP67

OPTIONS

CBOX / CBOX 350mA
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
PIN 7
LED POWER SUPPLY 350-700mA-DC / DIM



FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION



CBOX 140 x 140 x 173 142 x 142 x 300
216 12 00

IP68 CONNECTION KIT 95 x 45 x 25
216 12 01



IP68 CONNECTOR 3P Ø23 x 68
216 12 02



CONTROL GEAR


LED POWER SUPPLY 146 x 55 x 19
24V-DC / 20W
300 89 24 20

LED POWER SUPPLY 242 x 46 x 36
24V-DC / 40W
300 89 24 40

LED POWER SUPPLY 215 x 44 x 31
24V-DC / 60W
300 89 24 60

LED POWER SUPPLY 250 x 50 x 34
24V-DC / 80W
300 89 24 80 ED1

LED POWER SUPPLY 260 x 60 x 49
24V-DC / 150W
300 89 24 150

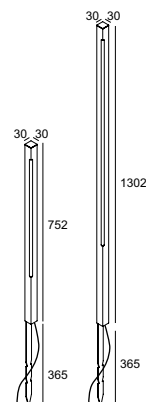

CRI > 80

STIEVIE

3000 K

LED TUBE 6W / 374lm / 24V-DC

750mm **270 73 075** ◇
 0,8 ◇ = N

LED TUBE 10W / 650lm / 24V-DC

1300mm **270 73 130** ◇
 1,3 ◇ = N

INCL. 1 x CABLE H05 RN-F 2 x 1mm² 2m
 INCL. PIN

◇ CE 0,5 IP54

OPTIONS

- CBOX
- IP68 CONNECTION KIT
- IP68 CONNECTOR 3P
- LED POWER SUPPLY 24V-DC



FULL INFO TECHNICAL CHAPTER


OPTIONS

INSTALLATION



CBOX 216 12 00	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT 216 12 01	95 x 45 x 25	
IP68 CONNECTOR 3P 216 12 02	Ø 23 x 68	
PIN 15 229 01 15	93 x 130 x 403	

AULA

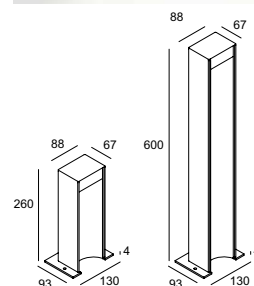

CRI > 90

AULA

3000 K

LED 7,1W / 774lm / 350mA

260mm **318 14 811 930** ◇
◇ = G-W

600mm **318 17 811 930** ◇
◇ = G-W

220-240V / 50-60Hz

CE IP55

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
PIN 15







FULL INFO TECHNICAL CHAPTER


OPTIONS

INSTALLATION

CBOX 216 12 00	140 x 140 x 173	142 x 142 x 300	
IP68 CONNECTION KIT 216 12 01	95 x 45 x 25		
IP68 CONNECTOR 3P 216 12 02	Ø 23 x 68		



TOURNESOL

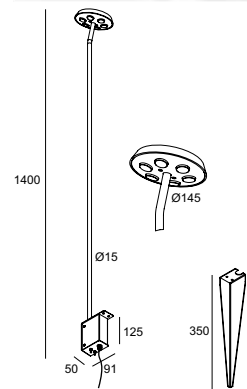

CRI > 80

TOURNESOL

3000 K

6 x LED [A] 1,1W / 120lm / 350mA



314 16 26 ◇
◇ = G

INCL. 1 x CABLE H05 RN-F 2 x 1mm² 2m
120-240V / 50-60Hz
INCL. PIN

IP54

OPTIONS

- CBOX
- IP68 CONNECTION KIT
- IP68 CONNECTOR 3P




FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

CBOX 216 12 00	140 x 140 x 173	142 x 142 x 300	
IP68 CONNECTION KIT 216 12 01	95 x 45 x 25		
IP68 CONNECTOR 3P 216 12 02	Ø23 x 68		
PIN 3 229 01 03	Ø108 x 404		

BUTLER P 30

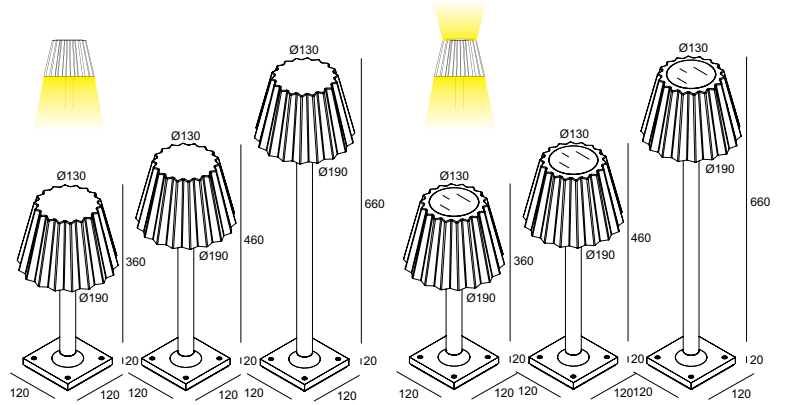

CRI > 90	BUTLER P 30	BUTLER P 30 DOWN-UP
3000 K	LED CLUSTER 16W / 1216lm	LED CLUSTER 6W / 600lm (UP) LED CLUSTER 10W / 760lm (DOWN)
FE	380mm 222 03 11 93 ◇ ◇ = A / B 1,4	380mm 222 03 12 93 ◇ ◇ = A / B 1,6
	480mm 222 03 21 93 ◇ ◇ = A / B 1,6	480mm 222 03 22 93 ◇ ◇ = A / B 1,8
	680mm 222 03 31 93 ◇ ◇ = A / B 1,8	680mm 222 03 32 93 ◇ ◇ = A / B 2,0
	220-240V / 50-60Hz MAINS DIMMING (FE) ◇ CE IP56 OPTIONS CBOX IP68 CONNECTION KIT IP68 CONNECTOR 3P PIN 3	220-240V / 50-60Hz MAINS DIMMING (FE) ◇ CE IP56 OPTIONS CBOX IP68 CONNECTION KIT IP68 CONNECTOR 3P PIN 3

DESIGN BY ARIK LEVY & DELTA LIGHT®
WWW.DELTALIGHT.COM/BUTLERBYARIKLEVY



FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

CBOX 140 x 140 x 173 142 x 142 x 300

IP68 CONNECTION KIT 95 x 45 x 25

IP68 CONNECTOR 3P Ø 23 x 68




MONTUR R P



NEW

IK07

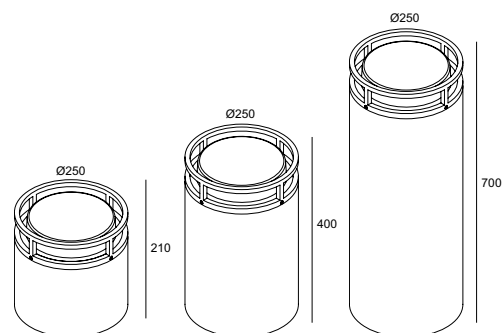

CRI > 80

MONTUR R P LED

3000 K

LED CLUSTER 6,3W / 840lm / 350mA

210mm **232 722 83** ◇
◇ = B

400mm **232 742 83** ◇
◇ = B

700mm **232 772 83** ◇
◇ = B

INCL. GLASS OPAL
100-240V / 50-60Hz

CE IP55

OPTIONS

CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P







FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION



CBOX 216 12 00 140 x 140 x 173 142 x 142 x 300


IP68 CONNECTION KIT 216 12 01 95 x 45 x 25



IP68 CONNECTOR 3P 216 12 02 Ø 23 x 68



PLATE 3 229 02 03 85 x 85 x 500



3000K
LED CLUSTER 7W / 2200K OFF
LED CLUSTER 4,2W / 3000K ON





2530K
LED CLUSTER 7W / 2200K ON
LED CLUSTER 4,2W / 3000K ON



2200K
LED CLUSTER 7W / 2200K ON
LED CLUSTER 4,2W / 3000K OFF



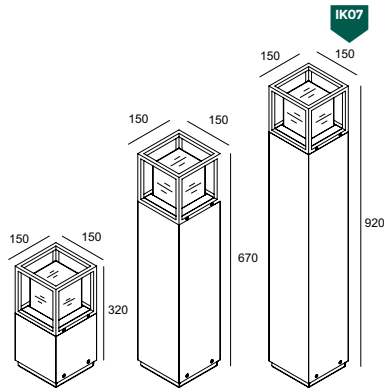

CRI > 80	MONTUR S P LED
3000 K	LED 6,3W / 808lm / 350mA
	320mm 232 432 83 ◇ 3,3 ◇ = A / B
	670mm 232 472 83 ◇ 5,0 ◇ = A / B
	920mm 232 492 83 ◇ 6,4 ◇ = A / B
INCL. GLASS OPAL 100-240V / 50-60Hz ◇ CE IP55	
OPTIONS CBOX IP68 CONNECTION KIT IP68 CONNECTOR 3P PLATE 3	

CRI > 80	MONTUR S P LED TW
2200 K 3000 K	LED 7W / 480lm (2200K) / 350mA LED 4,2W / 560lm (3000K) / 350mA
	320mm 232 432 99 ◇ 3,3 ◇ = A / B
	670mm 232 472 99 ◇ 5,0 ◇ = A / B
	920mm 232 492 99 ◇ 6,4 ◇ = A / B
INCL. GLASS OPAL 100-240V / 50-60Hz CABLING 2 CIRCUITS □ CE IP55	
OPTIONS CBOX IP68 CONNECTION KIT IP68 CONNECTOR 3P PLATE 3	

CRI > 80	MONTUR L P LED
3000 K	LED CLUSTER 13,3W / 1250lm / 350mA
FE	232 659 83 ◇ ◇ = B
MAINS DIMMING (FE) 100-240V / 50-60Hz □ CE 1,6 IP54	
OPTIONS CBOX IP68 CONNECTION KIT IP68 CONNECTOR 3P PLATE 3	





THONE ARCHITECTUUR / TIM VAN STEENBERGEN




FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

CBOX 216 12 00	140 x 140 x 173	142 x 142 x 300	
IP68 CONNECTION KIT 216 12 01	95 x 45 x 25		
IP68 CONNECTOR 3P 216 12 02	Ø 23 x 68		
PIN 12 229 01 12	42 x 142 x 403		
PLATE 7 229 02 07	150 x 200 x 3		

OBLIX

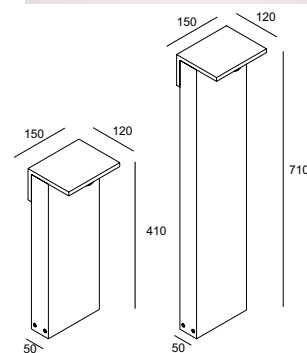

CRI > 90

OBLIX

3000 K

LED 7,1W / 774lm / 350mA

410mm **220 74 811 930** ◊
◊ = A / N

710mm **220 77 811 930** ◊
◊ = A / N

100-240V / 50-60Hz

IP55

OPTIONS

- CBOX
- IP68 CONNECTION KIT
- IP68 CONNECTOR 3P
- PIN 12
- PLATE 7












GRAUX & BAYENS




FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

CBOX 216 12 00	140 x 140 x 173	142 x 142 x 300	
IP68 CONNECTION KIT 216 12 01	95 x 45 x 25		
IP68 CONNECTOR 3P 216 12 02	Ø23 x 68		
PIN 13 229 01 13	57 x 192 x 403		
PLATE 8 229 02 08	195 x 267 x 3		

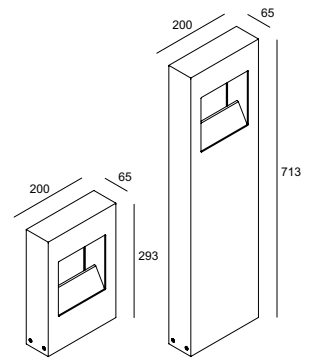

CRI > 90

WALKER LED

**3000
K**

LED 7,1W / 774lm / 350mA


293mm **220 63 811 930** ◇
◇ = A / G

713mm **220 67 811 930** ◇
◇ = A / G

100-240V / 50-60Hz

 **IP55**

OPTIONS
CBOX
IP68 CONNECTIONKIT
IP68 CONNECTOR 3P
PIN 13
PLATE 8

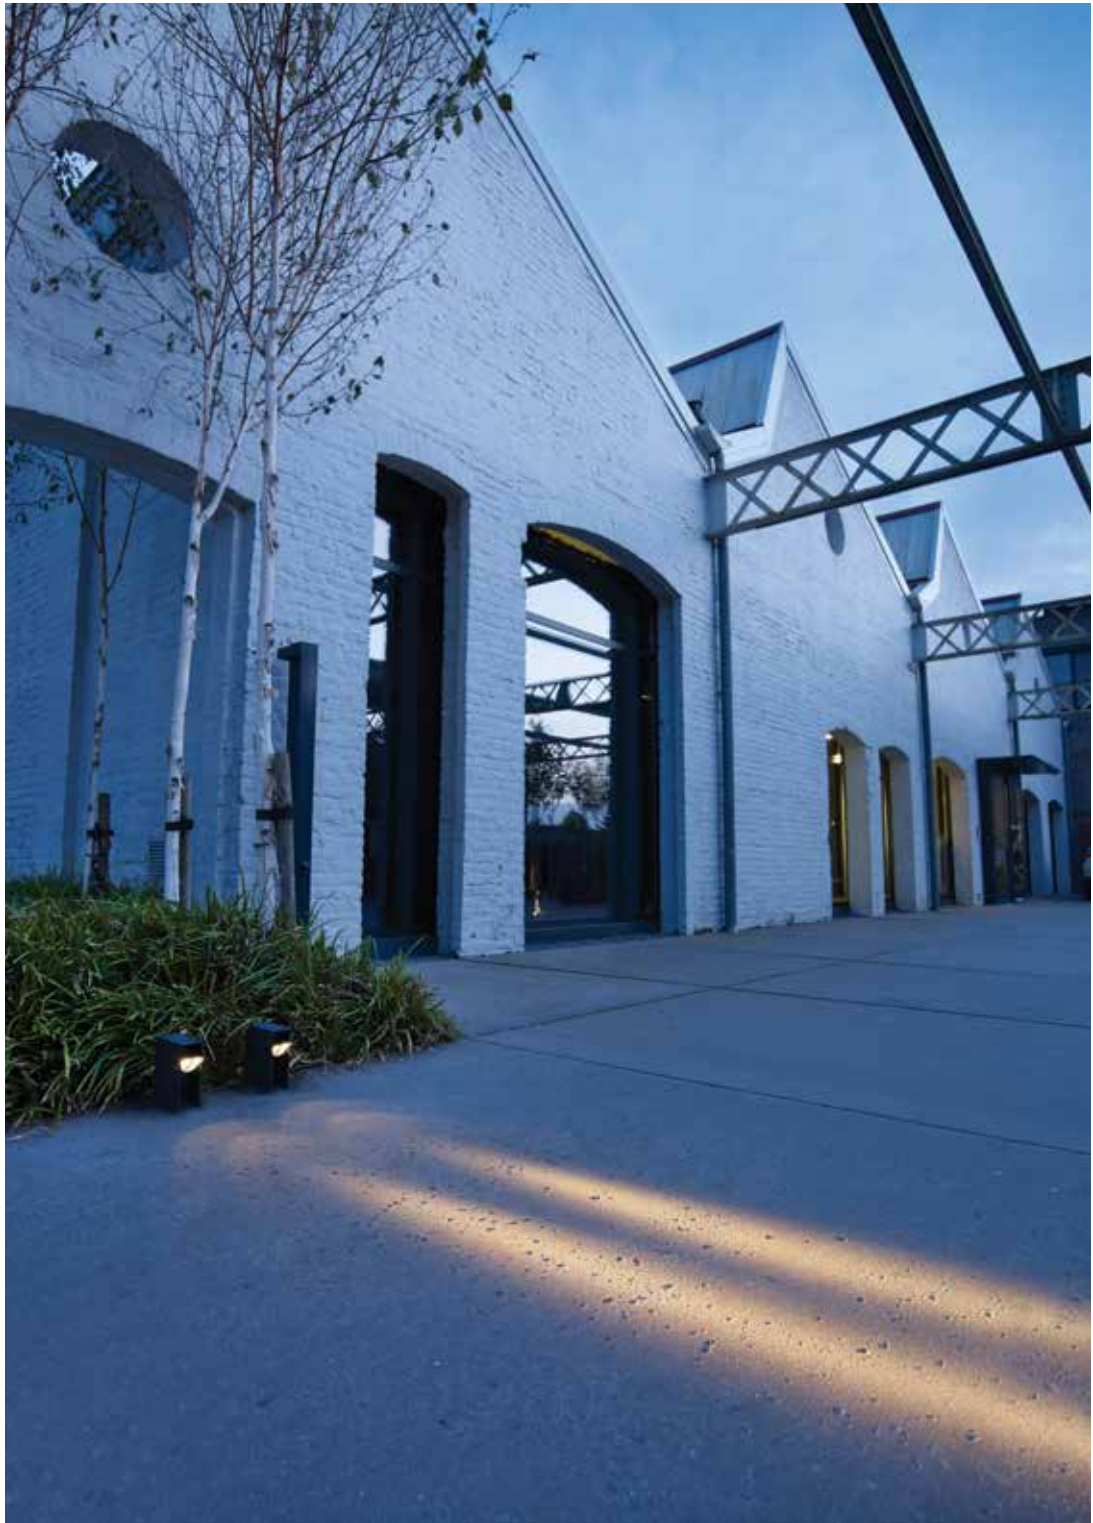

FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

CBOX 216 12 00	140 x 140 x 173	142 x 142 x 300	
IP68 CONNECTION KIT 216 12 01	95 x 45 x 25		
IP68 CONNECTOR 3P 216 12 02	Ø23 x 68		
PIN 1 229 01 01	58 x 58 x 280		
PLATE 1 229 02 01	200 x 200 x 3		


FULL INFO TECHNICAL CHAPTER

ACCESSORIES

KAP STRIPER ◇ 223 00 10 ◇	Ø58 / Ø53 / H83	
-------------------------------------	-----------------	--

◇ = B

STRIPER



CRI > 80

STRIPER

3000
K

LED 2,3W / 223lm / 700mA

LENS
SP
4°

223 00 12 ◇
◇ = A / N

120-240V / 50-60Hz

IP55

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
PIN 1
PLATE 1
ACCESSORIES
KAP STRIPER



STRIPER + KAP STRIPER












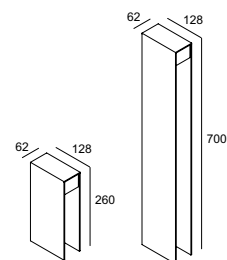
FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

CBOX 216 12 00	140 x 140 x 173	142 x 142 x 300	
IP68 CONNECTION KIT 216 12 01	95 x 45 x 25		
IP68 CONNECTOR 3P 216 12 02	Ø 23 x 68		
PIN 1 229 01 01	58 x 58 x 280		
PLATE 1 229 02 01	200 x 200 x 3		

MONOPOL LED



CRI > 90

MONOPOL LED


3000
K

LED 7,1W / 774lm / 350mA

260mm **223 16 811 930** ◇
◇ = A / G

700mm **223 17 811 930** ◇
◇ = A / G

100-240V / 50-60Hz

 IP55

OPTIONS
CBOX
IP68 CONNECTIONKIT
IP68 CONNECTOR 3P
PIN 1
PLATE 1











FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

CBOX 216 12 00	140 x 140 x 173	142 x 142 x 300	
IP68 CONNECTION KIT 216 12 01	95 x 45 x 25		
IP68 CONNECTOR 3P 216 12 02	∅23 x 68		
PIN 14 229 01 14	120 x 120 x 403		

BOTANIC

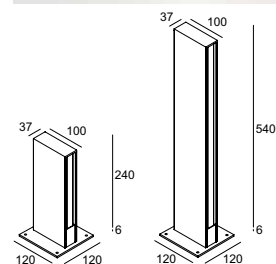

CRI > 80

BOTANIC

3000 K

2 x LEDSTRIP 1,25W / 88lm / 24V-DC

240mm **317 12 22** ◊
◊ = A / G
1,9

3000 K

2 x LEDSTRIP 3W / 220lm / 24V-DC

540mm **317 15 22** ◊
◊ = A / G
3,6

220-240V / 50-60Hz

 **CE** IP55

OPTIONS





CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
PIN 14




FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

CBOX 216 12 00	140 x 140 x 173	142 x 142 x 300	
IP68 CONNECTION KIT 216 12 01	95 x 45 x 25		
IP68 CONNECTOR 3P 216 12 02	Ø 23 x 68		
PLATE 3 229 02 03	85 x 85 x 500		

MR. JUNIOR X



Mr. JUNIOR X

- 1 x TCA-SE max.15W
- 1 x TC-SB max.16W

226 21 17 ◊
◊ = A / G


E27Ls / 100-240V / 50-60Hz

◊ CE 3,5 IP54

OPTIONS

- CBOX
- IP68 CONNECTION KIT
- IP68 CONNECTOR 3P
- PLATE 3

MR. SENIOR

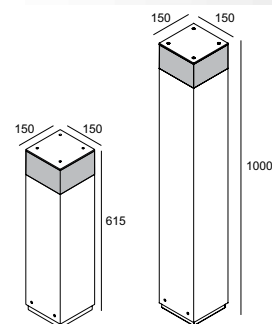

Mr. SENIOR

- 1 x TCA-SE max.20W
- 1 x TC-SB max.16W

615mm 226 23 57 ◊
◊ = A / G

1000mm 226 23 97 ◊
◊ = A

E27Ls / 100-240V / 50-60Hz

◊ CE IP54

OPTIONS

- CBOX
- IP68 CONNECTION KIT
- IP68 CONNECTOR 3P
- PLATE 3



FULL INFO TECHNICAL CHAPTER

OPTIONS


INSTALLATION

CBOX 216 12 00	140 x 140 x 173	142 x 142 x 300	
IP68 CONNECTION KIT 216 12 01	95 x 45 x 25		
IP68 CONNECTOR 3P 216 12 02	Ø 23 x 68		



VISIONAIR + VISION S OUT LED

VISIONAIR

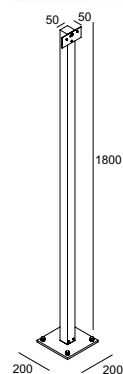

VISIONAIR

278 28 00 ◇
◇ = A

INCL. CABLING
EXCL. 1 x VISION S OUT LED **278 26 22**



OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P