

INTERIOR WALL RECESSED

Wall recessed luminaires are often applied to provide direction and guarantee safety, but the Delta Light® range has much more to offer. In addition to functional or directional lighting, the collection enables you to create playful light effects and original compositions. You can combine several fixtures to produce an attractive and artistic setting. Or you can opt for a discreet, but entertaining emphasis of light.

www.deltalight.com/IWR



To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url. E.g. www.deltalight.com/3040512 or www.deltalight.com/inlet



INDEX

INTERIOR WALL RECESSED



HELI
INT 423



LEDS C S II
INT 429



LOGIC MINI W R
INT 424



INLET
INT 431



LOGIC MINI W S
INT 424



FEMTOLINE
INT 433



LOGIC W L
INT 425




LOGIC W S
INT 425



LEDS C R II
INT 429

FEMTOLINE	INT 433
HELI	INT 423
INLET	INT 431
LEDS C R II	INT 429
LEDS C S II	INT 429
LOGIC MINI W R	INT 424
LOGIC MINI W S	INT 424
LOGIC W L	INT 425
LOGIC W S	INT 425

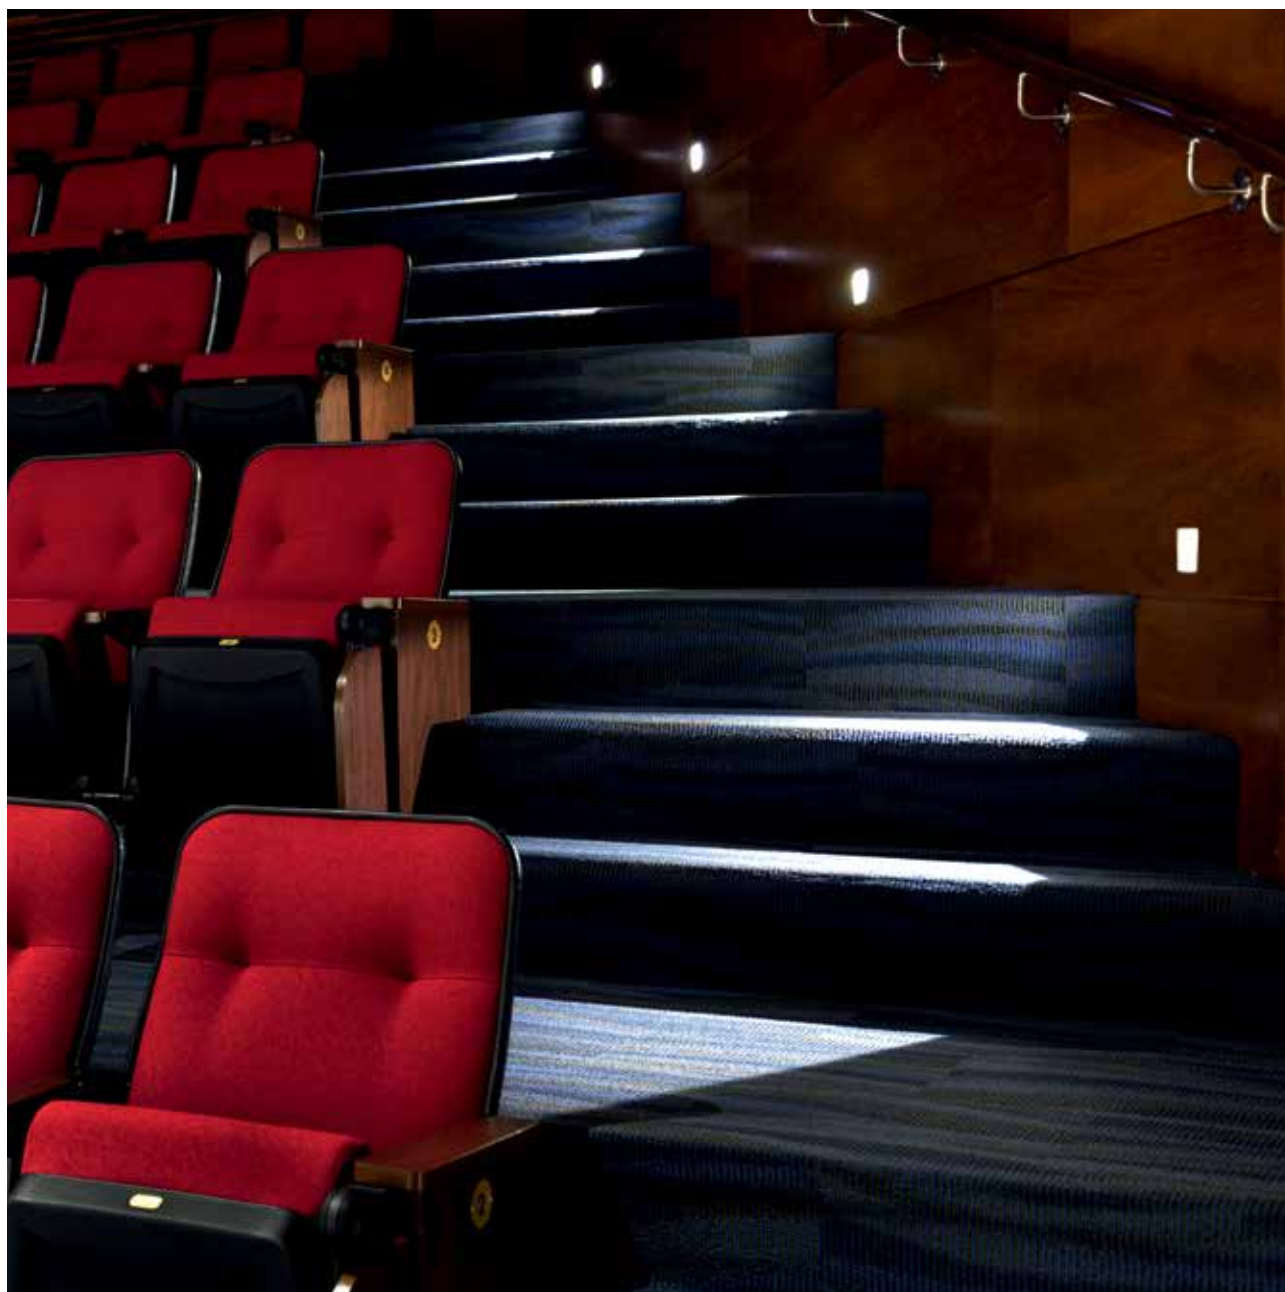

FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION



PLASTERKIT 186 190 x 150 75 x 75
207 01 186

CONCRETE BOX 186 145 x 105 x 70 105 x 110
270 11 186

MOUNTING KIT 75 117 x 117 x 22 Ø121
202 00 75



CONTROL GEAR




LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



HELI

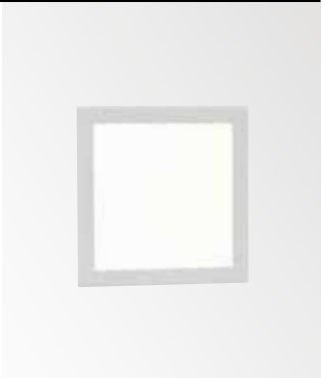

75 x 75 x 85



75 x 75 x 60

CRI > 80

HELI 1 SCREEN LED

4000 K

LED [A] 1,1W / 130lm / 350mA

202 04 14 ◇
◇ = A / W

3000 K

LED [A] 1,1W / 120lm / 350mA

202 04 12 ◇
◇ = A / W

CE 0,2 IP20

OPTIONS
PLASTERKIT 186
CONCRETE BOX 186
MOUNTING KIT 75
LED POWER SUPPLY 350mA-DC / DIM

HELI 1 LED

LED [A] 1,1W / 120lm / 350mA

202 04 32 ◇
◇ = A / W

CE 0,2 IP40

OPTIONS
PLASTERKIT 186
CONCRETE BOX 186
MOUNTING KIT 75
LED POWER SUPPLY 350mA-DC / DIM


REQUIREMENTS

INSTALLATION

CONCRETE BOX 191

270 11 191


315 x 80



CONCRETE BOX 192

270 11 192


135 x 125



CONCRETE PACK LOGIC W L

304 32 96

315 x 80



CONCRETE PACK LOGIC W S

304 33 96

135 x 125



OPTIONS

INSTALLATION

CONCRETE BOX 188

270 11 188



Ø60 x 65

Ø67 x 70

CONTROL GEAR

LED POWER SUPPLY

24V-DC / 20W



300 89 24 20



146 x 55 x 19



LOGIC MINI W



55 x 50

55 x 50

CRI > 80

LOGIC MINI W R

LOGIC MINI W S



LED 0,6W / 40lm / 24V

LED 0,6W / 40lm / 24V

304 30 12 ◇

◇ = A / W

304 31 12 ◇




◇ = A / W

OPTIONS
CONCRETE BOX 188
LED POWER SUPPLY 24V-DC

OPTIONS
CONCRETE BOX 188
LED POWER SUPPLY 24V-DC



LOGIC W

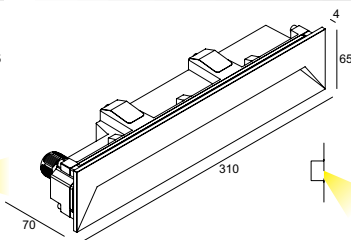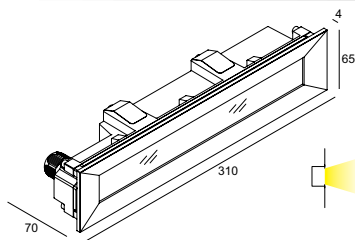

BOX / 110-135

CRI > 80

LOGIC W L F

3000 K

LED CLUSTER 9,5W / 1270lm / 350mA

304 32 02 83 ◇
◇ = A / N / W

INCL. 1 x PG11
220-240V / 50-60Hz

◇ CE 1.0 IP65

REQUIREMENTS
CONCRETE BOX 191
or
CONCRETE PACK LOGIC W L

BOX / 110-135

LOGIC W L

LED CLUSTER 9,5W / 1270lm / 350mA

304 32 01 83 ◇
◇ = A / N / W

INCL. 1 x PG11
220-240V / 50-60Hz

◇ CE 1.0 IP65

REQUIREMENTS
CONCRETE BOX 191
or
CONCRETE PACK LOGIC W L

BOX / 115-140

CRI > 90

LOGIC W S

3000 K


LED 7,1W / 774lm / 350mA

304 33 811 930 ◇
◇ = A / N / W

INCL. 1 x PG11
110-240V / 50-60Hz

◇ CE 1.0 IP65

REQUIREMENTS
CONCRETE BOX 192
or
CONCRETE PACK LOGIC W S

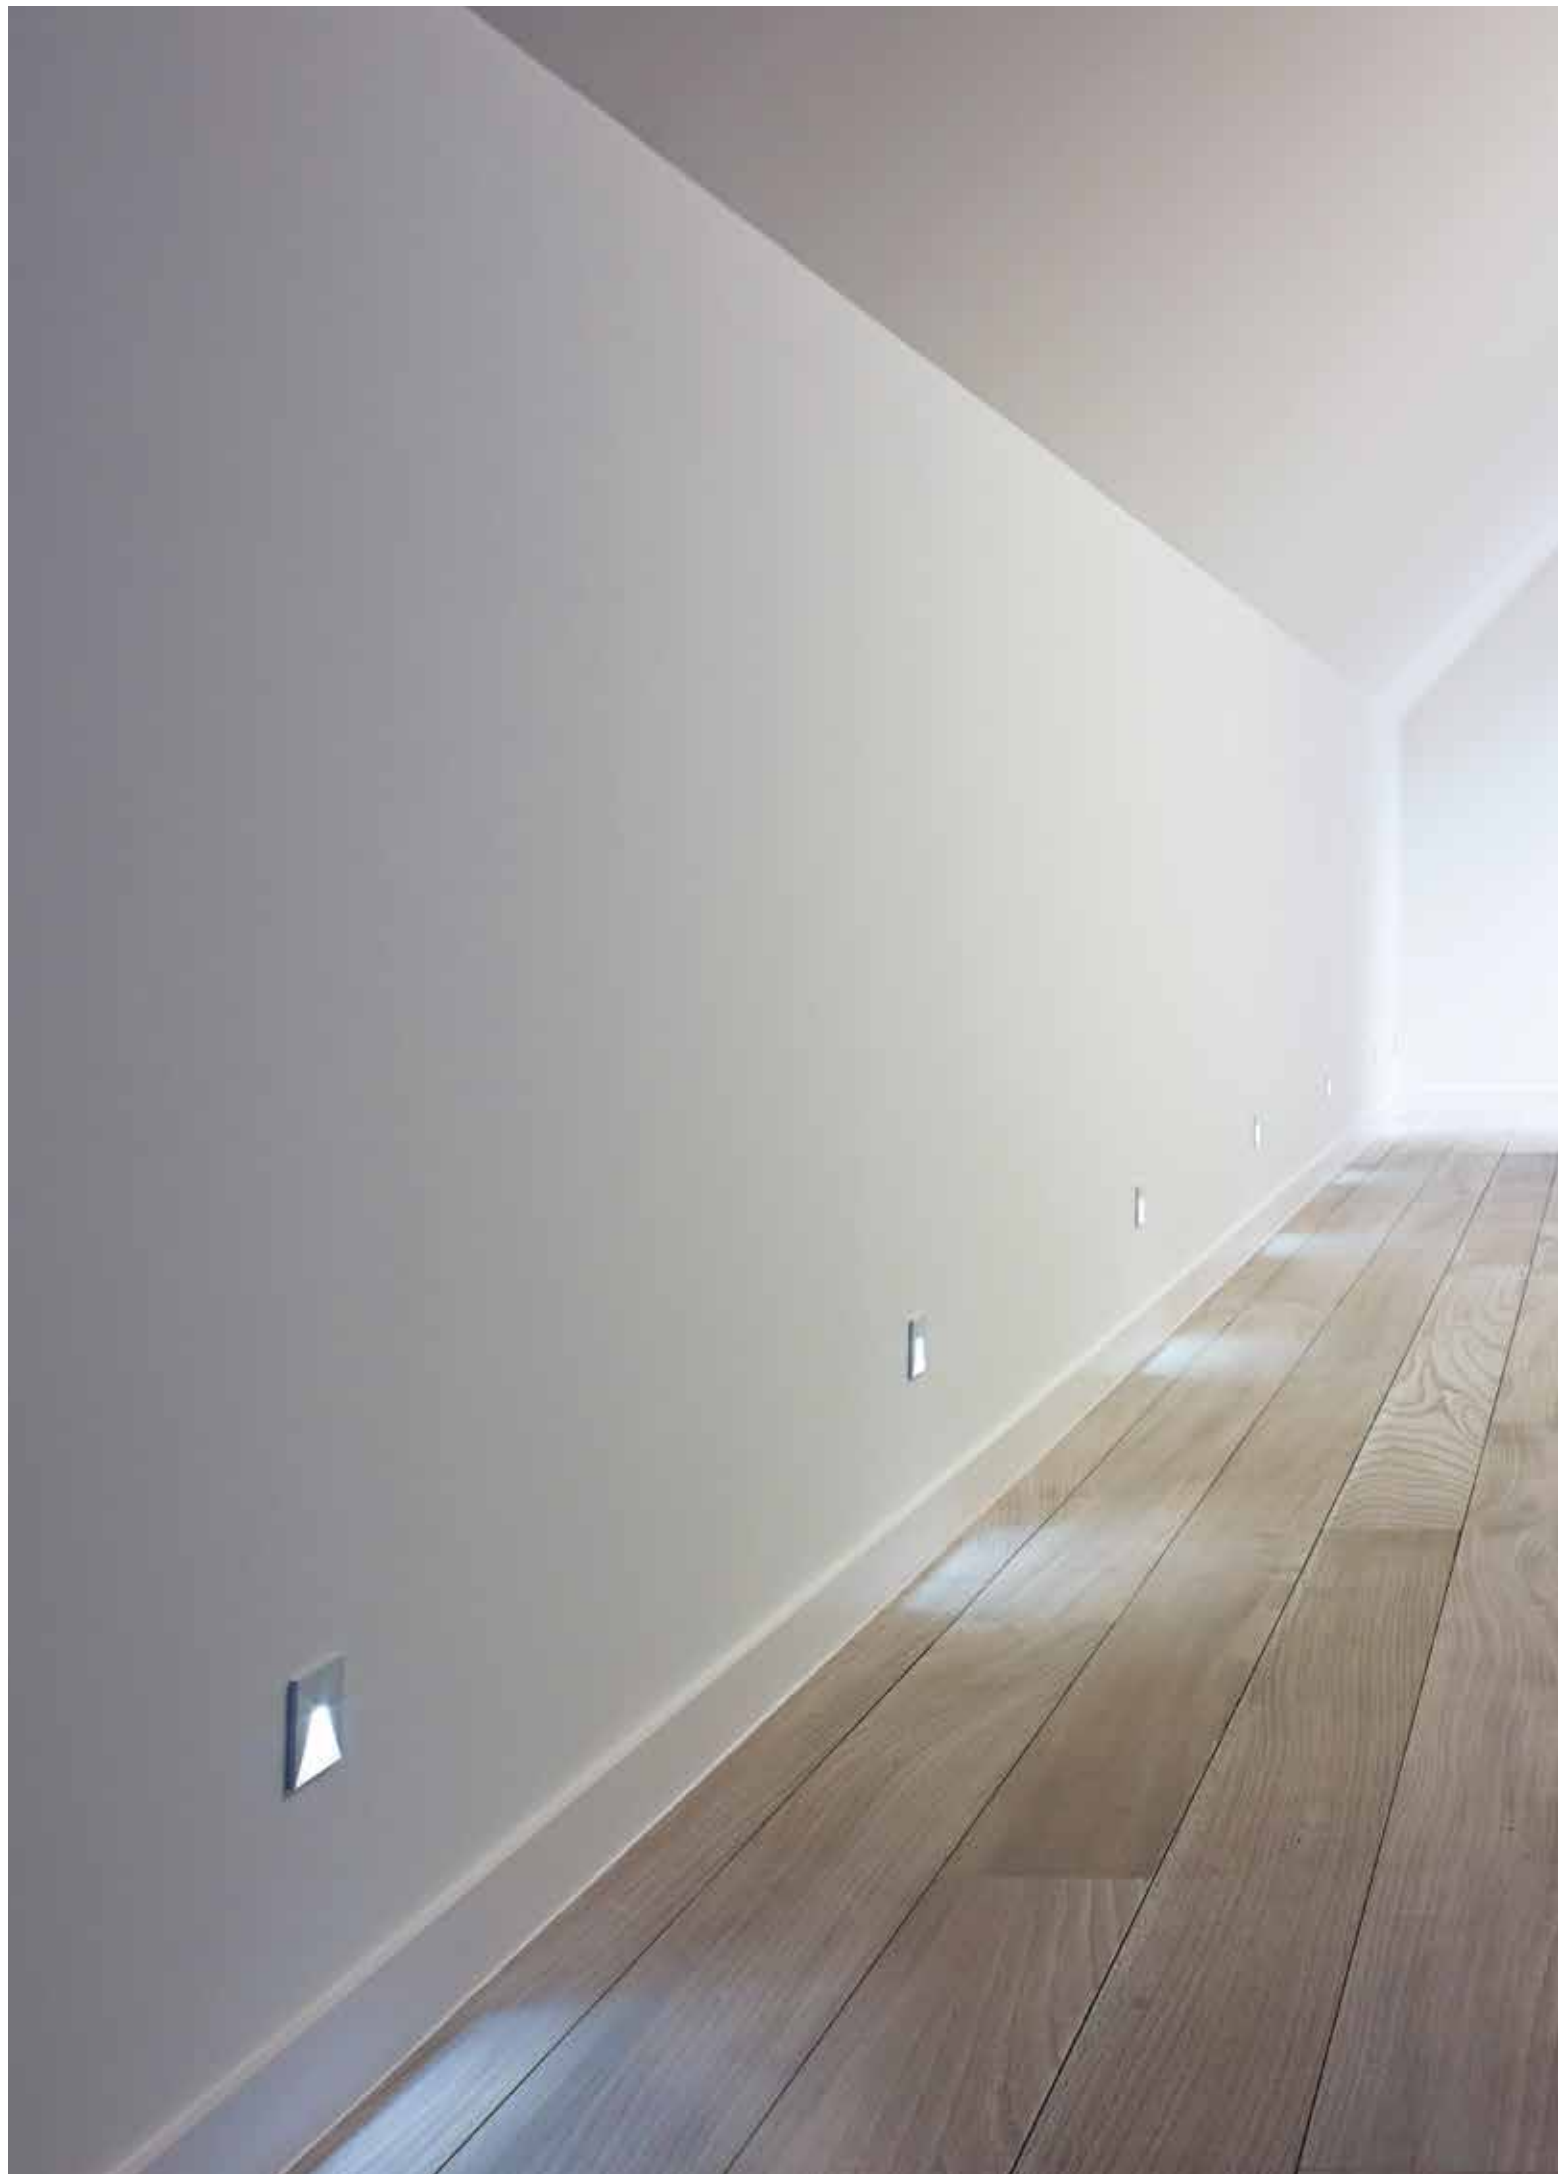






FULL INFO TECHNICAL CHAPTER		OPTIONS	
INSTALLATION			
CONCRETE BOX 195		Ø54 x 60	Ø56 x 65
270 11 195			
CONCRETE BOX 196		51 x 51 x 60	52 x 52 x 65
270 11 196			
CONTROL GEAR			
LED POWER SUPPLY			
ALL INFO ON FOLD-OUT COVER			




LEDS C®

NEW




49 x 49 x 46

NEW



51 x 46



41 x 38

CRI > 80

LEDS C S II

4000 K

LED CLUSTER 1W / 155lm / 350mA

302 202 830 ◇
◇ = W

3000 K

LED CLUSTER 1W / 155lm / 350mA

302 202 820 ◇
◇ = W

2700 K

CE 0.1 IP20 IP40

OPTIONS
CONCRETE BOX 196
LED POWER SUPPLY 350mA-DC / DIM

LEDS C R II

LED CLUSTER 1W / 155lm / 350mA

302 201 830 ◇
◇ = W

LED CLUSTER 1W / 155lm / 350mA

302 201 820 ◇
◇ = W

CE 0.1 IP20 IP40

OPTIONS
CONCRETE BOX 195
LED POWER SUPPLY 350mA-DC / DIM

LEDS C R ST

LED [A] 1,1W / 130lm / 350mA

302 20 34 ◇
◇ = ANO

LED [A] 1,1W / 120lm / 350mA

302 20 32 ◇
◇ = ANO

CE 0.1 IP67

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM



FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

PLASTERKIT 145
304 05 99



140 x 235

110 x 180

CONCRETE BOX 145
304 05 98


150 x 210 x 75

155 x 215 x 80

MOUNTING KIT
INLET FLUSH
304 05 01

140 x 200 x 38

55 x 190 x 45




CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



INLET S



22 x 170 x 45 / min.12

CRI > 80

INLET S

4000
K

LED [A] 1,1W / 130lm / 350mA

304 05 14 ◇
◇ = A / W

3000
K

LED [A] 1,1W / 120lm / 350mA

304 05 12 ◇
◇ = A / W

2700
K

LED [A] 1,1W / 115lm / 350mA

304 05 13 ◇
◇ = A / W

CE 0,2 IP20


OPTIONS
PLASTERKIT 145
CONCRETE BOX 145
MOUNTING KIT INLET FLUSH
LED POWER SUPPLY 350mA-DC / DIM

INLET S W +
PLASTERKIT 145

INLET S W +
MOUNTING KIT INLET FLUSH



FULL INFO TECHNICAL CHAPTER		OPTIONS	
INSTALLATION			
PLASTERKIT 184	304 x 85	222 x 54	
207 01 184			
CONCRETE BOX 184	270 x 91 x 65	273 x 94	
270 11 184			
CONTROL GEAR			
LED POWER SUPPLY	146 x 55 x 19		
24V-DC / 20W			
300 89 24 20			
LED POWER SUPPLY	242 x 46 x 36		
24V-DC / 40W			
300 89 24 40			
LED POWER SUPPLY	215 x 44 x 31		
24V-DC / 60W			
300 89 24 60			



 219 x 38 x 65

CRI > 80

FEMTOLINE 145

4000 K

LEDSTRIP WHITE 1,5W / 120lm / 24V-DC

376 01 244 ◇
◇ = ANO

3000 K

LEDSTRIP WHITE 1,5W / 120lm / 24V-DC

376 01 242 ◇
◇ = ANO

   IP22

OPTIONS
PLASTERKIT 184
CONCRETE BOX 184
LED POWER SUPPLY 24V-DC