

INTERIOR WALL SURFACE

The indoor wall mounted luminaires can perform many different functions, ranging from a diffuse illumination to an eye catching composition or functional corridor lighting.

To provide an expressive touch to your project, some wall luminaires in the collection combine LED with a lens, resulting in tightly delineated light patterns.

www.deltalight.com/IWS



To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/2787112L or www.deltalight.com/forty-5



INDEX

INTERIOR WALL SURFACE



TOPIX
INT 439



BUTLER W
INT 451



MONTUR R
INT 459



GALA XL
INT 469



NEC + ULTRA
INT 479



BOXY WL+
INT 491



LOOK IN
INT 441



MONTUR S
INT 452



SONTUR R
INT 459




WA-T
INT 471



ORBIT LED
INT 481



YUPI
INT 493



PUK
INT 443



MONTUR M
INT 453



WANT-IT
INT 461



GABOO
INT 473



VISION
INT 483



BOTEE
INT 495



FORTY-5
INT 445



MONTUR L
INT 455



VISA
INT 463



VIKTOR
INT 475



CAMUS 10
INT 487



FEMTOLINE TP WALL
INT 497



FIFTY-5
INT 449



SONTUR L
INT 455



GALA S
INT 464



SKELP ON
INT 475



VINCE
INT 487



BACKSPACE LED
INT 499



FIFTY-LED
INT 449



MONTUR SQL
INT 459



GALA
INT 465



ULTRA
INT 477



TIGA LED
INT 489



T-LINER
INT 501



JETI
INT 503

BACKSPACE LED	INT 499
BOTEE	INT 495
BOXY WL+	INT 491
BUTLER W	INT 451
CAMUS 10	INT 487
FEMTOLINE TP WALL	INT 497
FIFTY-5	INT 449
FIFTY-LED	INT 449
FORTY-5	INT 445
GABOO	INT 473
GALA	INT 465
GALA S	INT 464
GALA XL	INT 469
JETI	INT 503
LOOK IN	INT 441
MONTUR L	INT 455
MONTUR M	INT 453
MONTUR R	INT 459
MONTUR S	INT 452
MONTUR SQL	INT 459
NEC + ULTRA	INT 479
ORBIT LED	INT 481
PUK	INT 443
SKELP ON	INT 475
SONTUR L	INT 455
SONTUR R	INT 459
T-LINER	INT 501
TIGA LED	INT 489
TOPIX	INT 439
ULTRA	INT 477
VIKTOR	INT 475
VINCE	INT 487
VISA	INT 463
VISION	INT 483
WA-T	INT 471
WANT-IT	INT 461
YUPI	INT 493



FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION



CONCRETE BOX 153
302 20 21

43 x 43 x 60

43 x 43

CONCRETE BOX TR 154
302 20 22

43 x 43 x 60

43 x 43


CONTROL GEAR

LED POWER SUPPLY

ALL INFO ON FOLD-OUT COVER



TOPIX



41 x 38

CRI > 80

TOPIX

4000
K

2 x LED [A] 1,1W / 130lm / 350mA

304 17 04 ◇

◇ = A / W

3000
K

2 x LED [A] 1,1W / 120lm / 350mA

304 17 02 ◇

◇ = A / W


CE 0,1 IP20

OPTIONS

CONCRETE BOX 153

CONCRETE BOX TR 154

LED POWER SUPPLY 350mA-DC / DIM

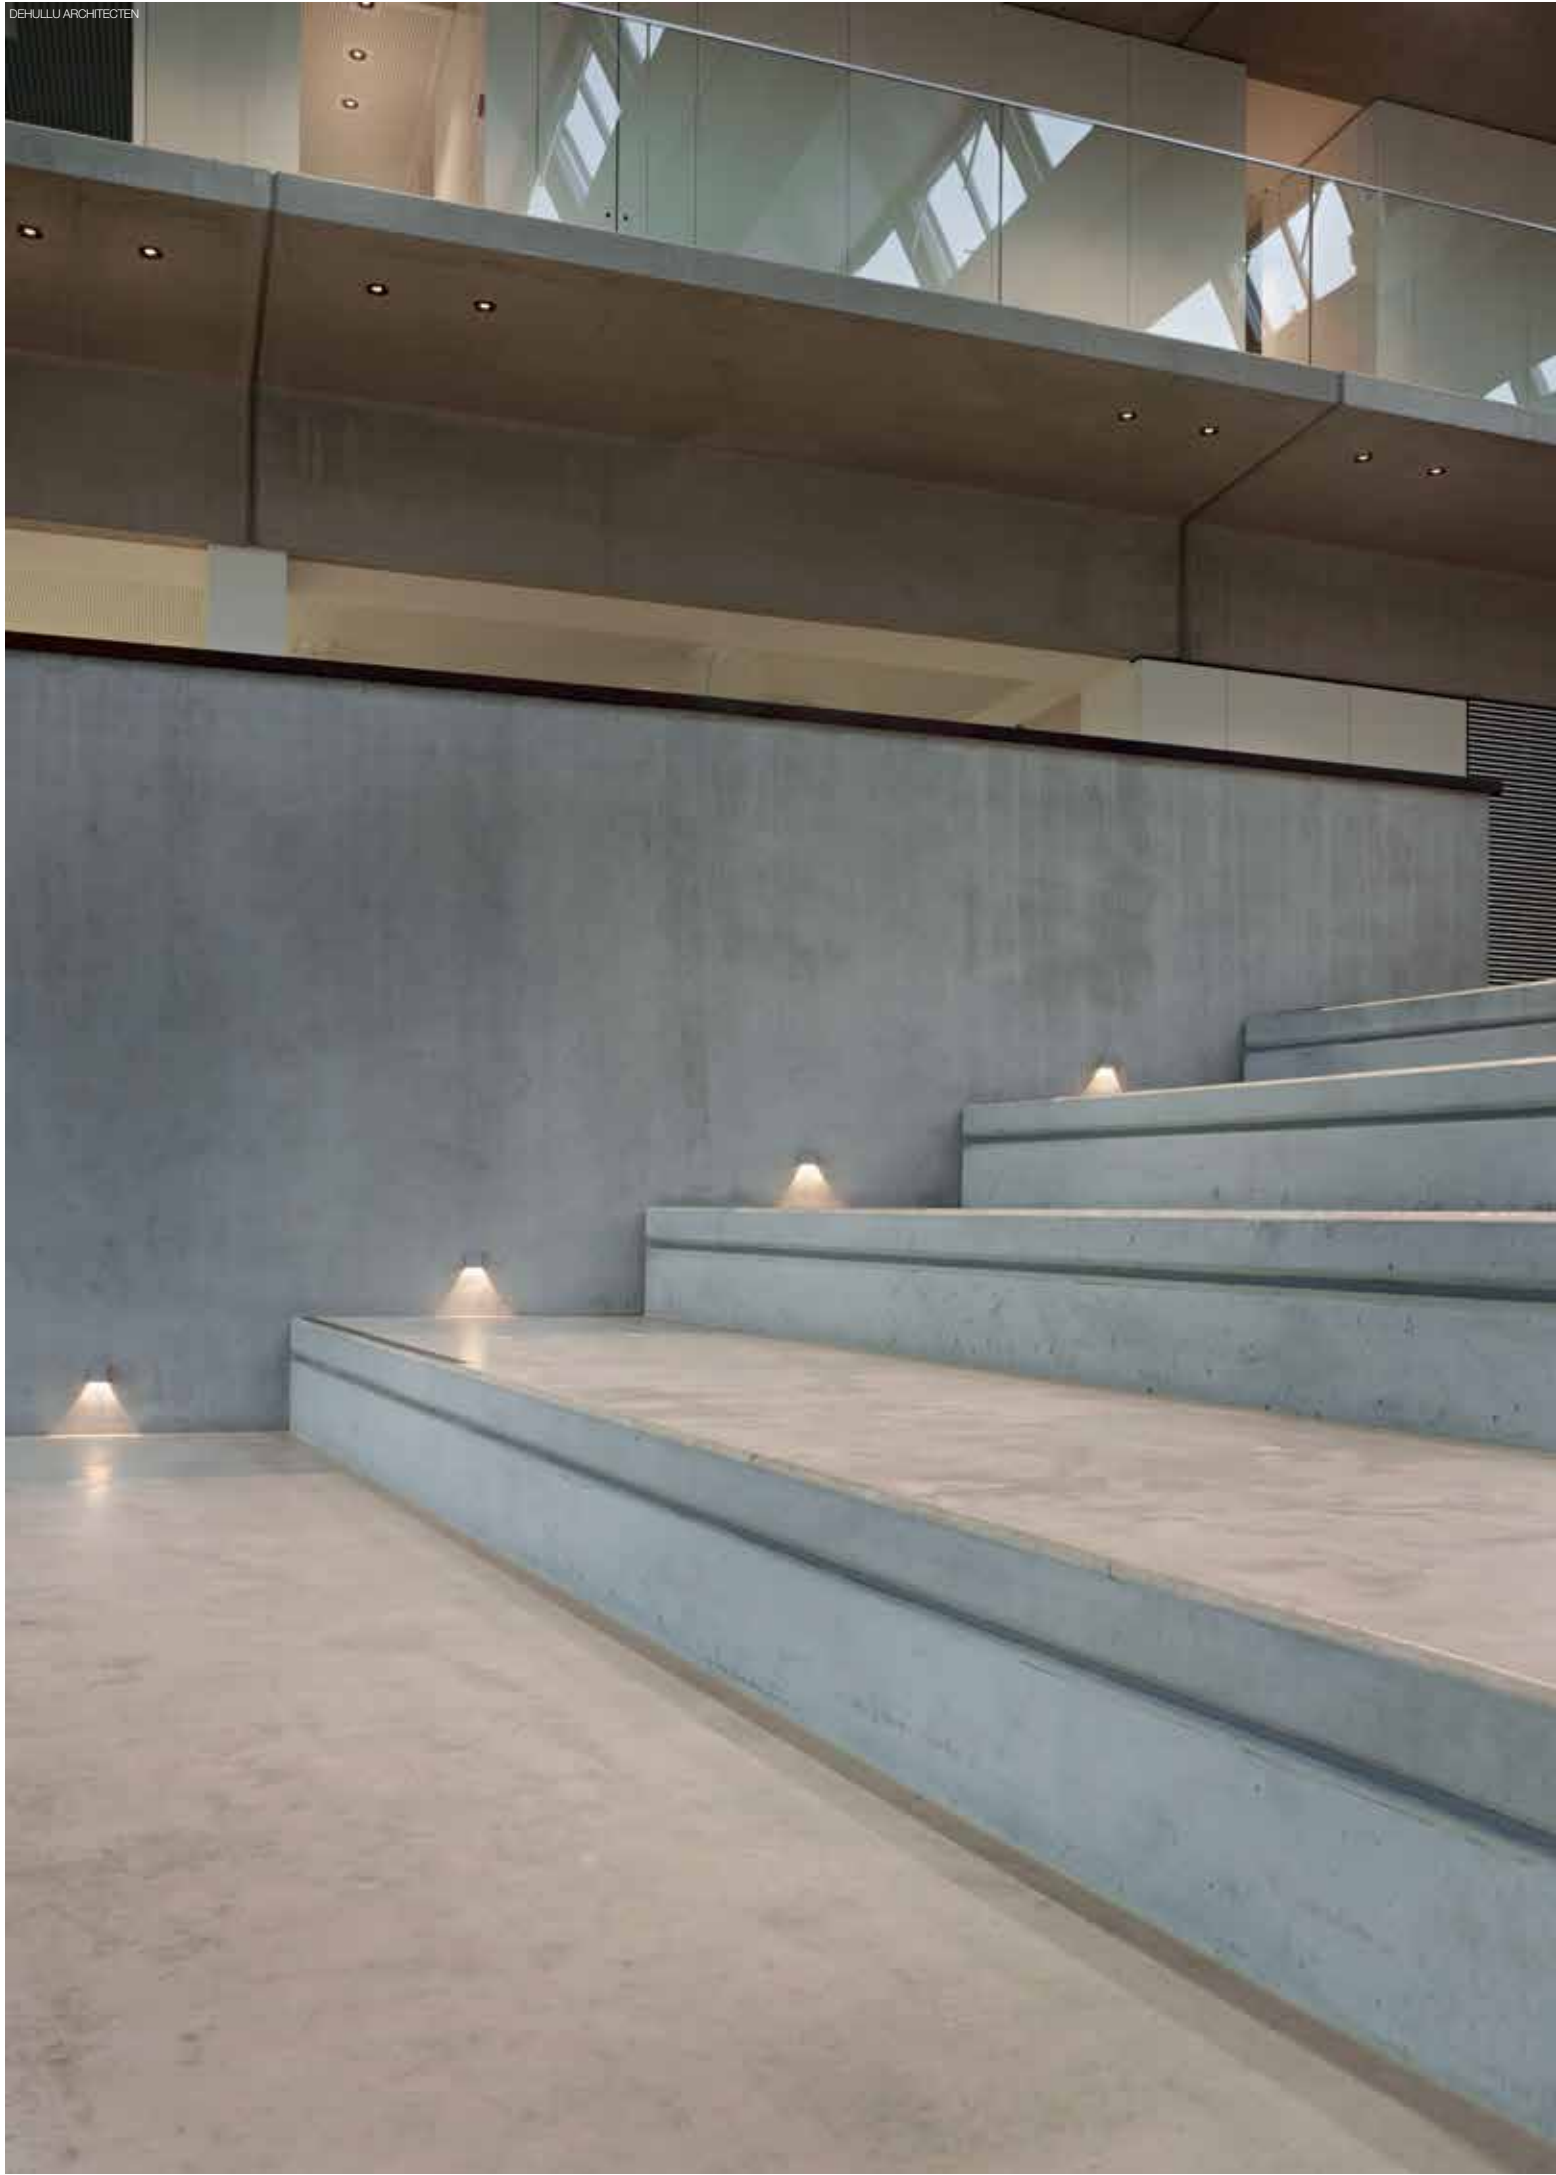

FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION



CONCRETE BOX 153
302 20 21

43 x 43 x 60

43 x 43

CONCRETE BOX TR 154
302 20 22

43 x 43 x 60


43 x 43

CONTROL GEAR

LED POWER SUPPLY
 ALL INFO ON FOLD-OUT COVER



LOOK IN



41 x 38

CRI > 80

LOOK IN

4000
K

LED [A] 1,1W / 130lm / 350mA

304 13 04 ◇
 ◇ = A / W

3000
K

LED [A] 1,1W / 120lm / 350mA

304 13 02 ◇
 ◇ = A / W


 IP20

OPTIONS
 CONCRETE BOX 153
 CONCRETE BOX TR 154
 LED POWER SUPPLY 350mA-DC / DIM



FULL INFO TECHNICAL CHAPTER

OPTIONS

CONTROL GEAR


LED POWER SUPPLY
12V-DC / 20W
300 89 12 20



146 x 55 x 19



PUK



CRI > 80

PUK

4000

K

4 x LED Ø5mm / 12V-DC / TOTAL 0,5W

301 00 44 ◇
◇ = A

2800

K

4 x LED Ø5mm / 12V-DC / TOTAL 0,5W

301 00 05 ◇
◇ = A


BLUE

4 x LED Ø5mm / 12V-DC / TOTAL 0,5W

301 00 04 BL ◇
◇ = A



CE 0,1 IP20

OPTIONS
LED POWER SUPPLY 12V-DC / 20W

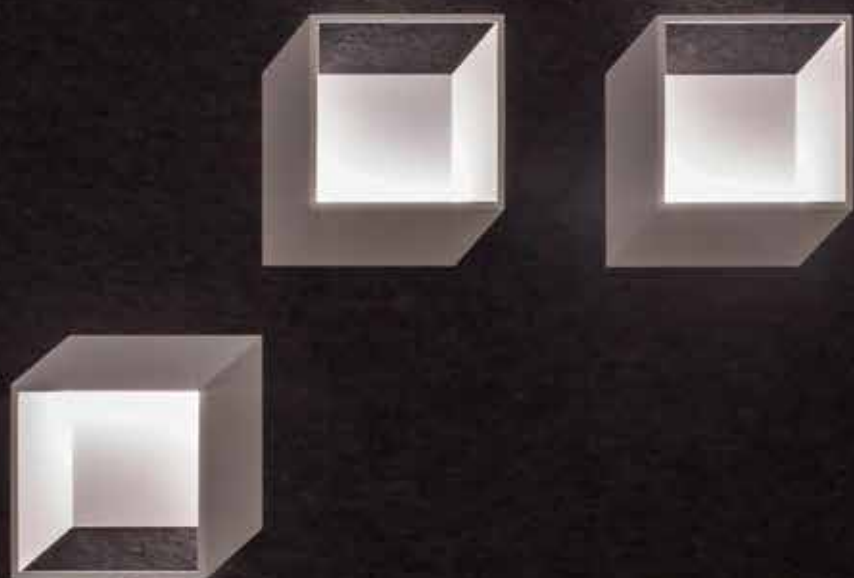



FORTY-5



CRI > 80

FORTY-5 L

FORTY-5 R

3000
K

LED CLUSTER 3,15W / 420lm / 350mA

LED CLUSTER 3,15W / 420lm / 350mA

278 71 12 L ◇

◇ = W

278 71 12 R ◇


◇ = W


220-240V / 50-60Hz

CE 2,7 IP20

220-240V / 50-60Hz



CE 2,7 IP20

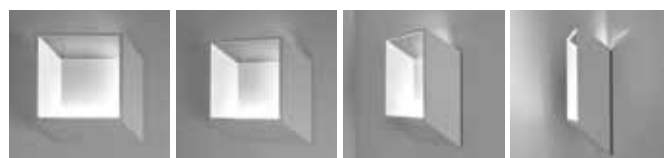

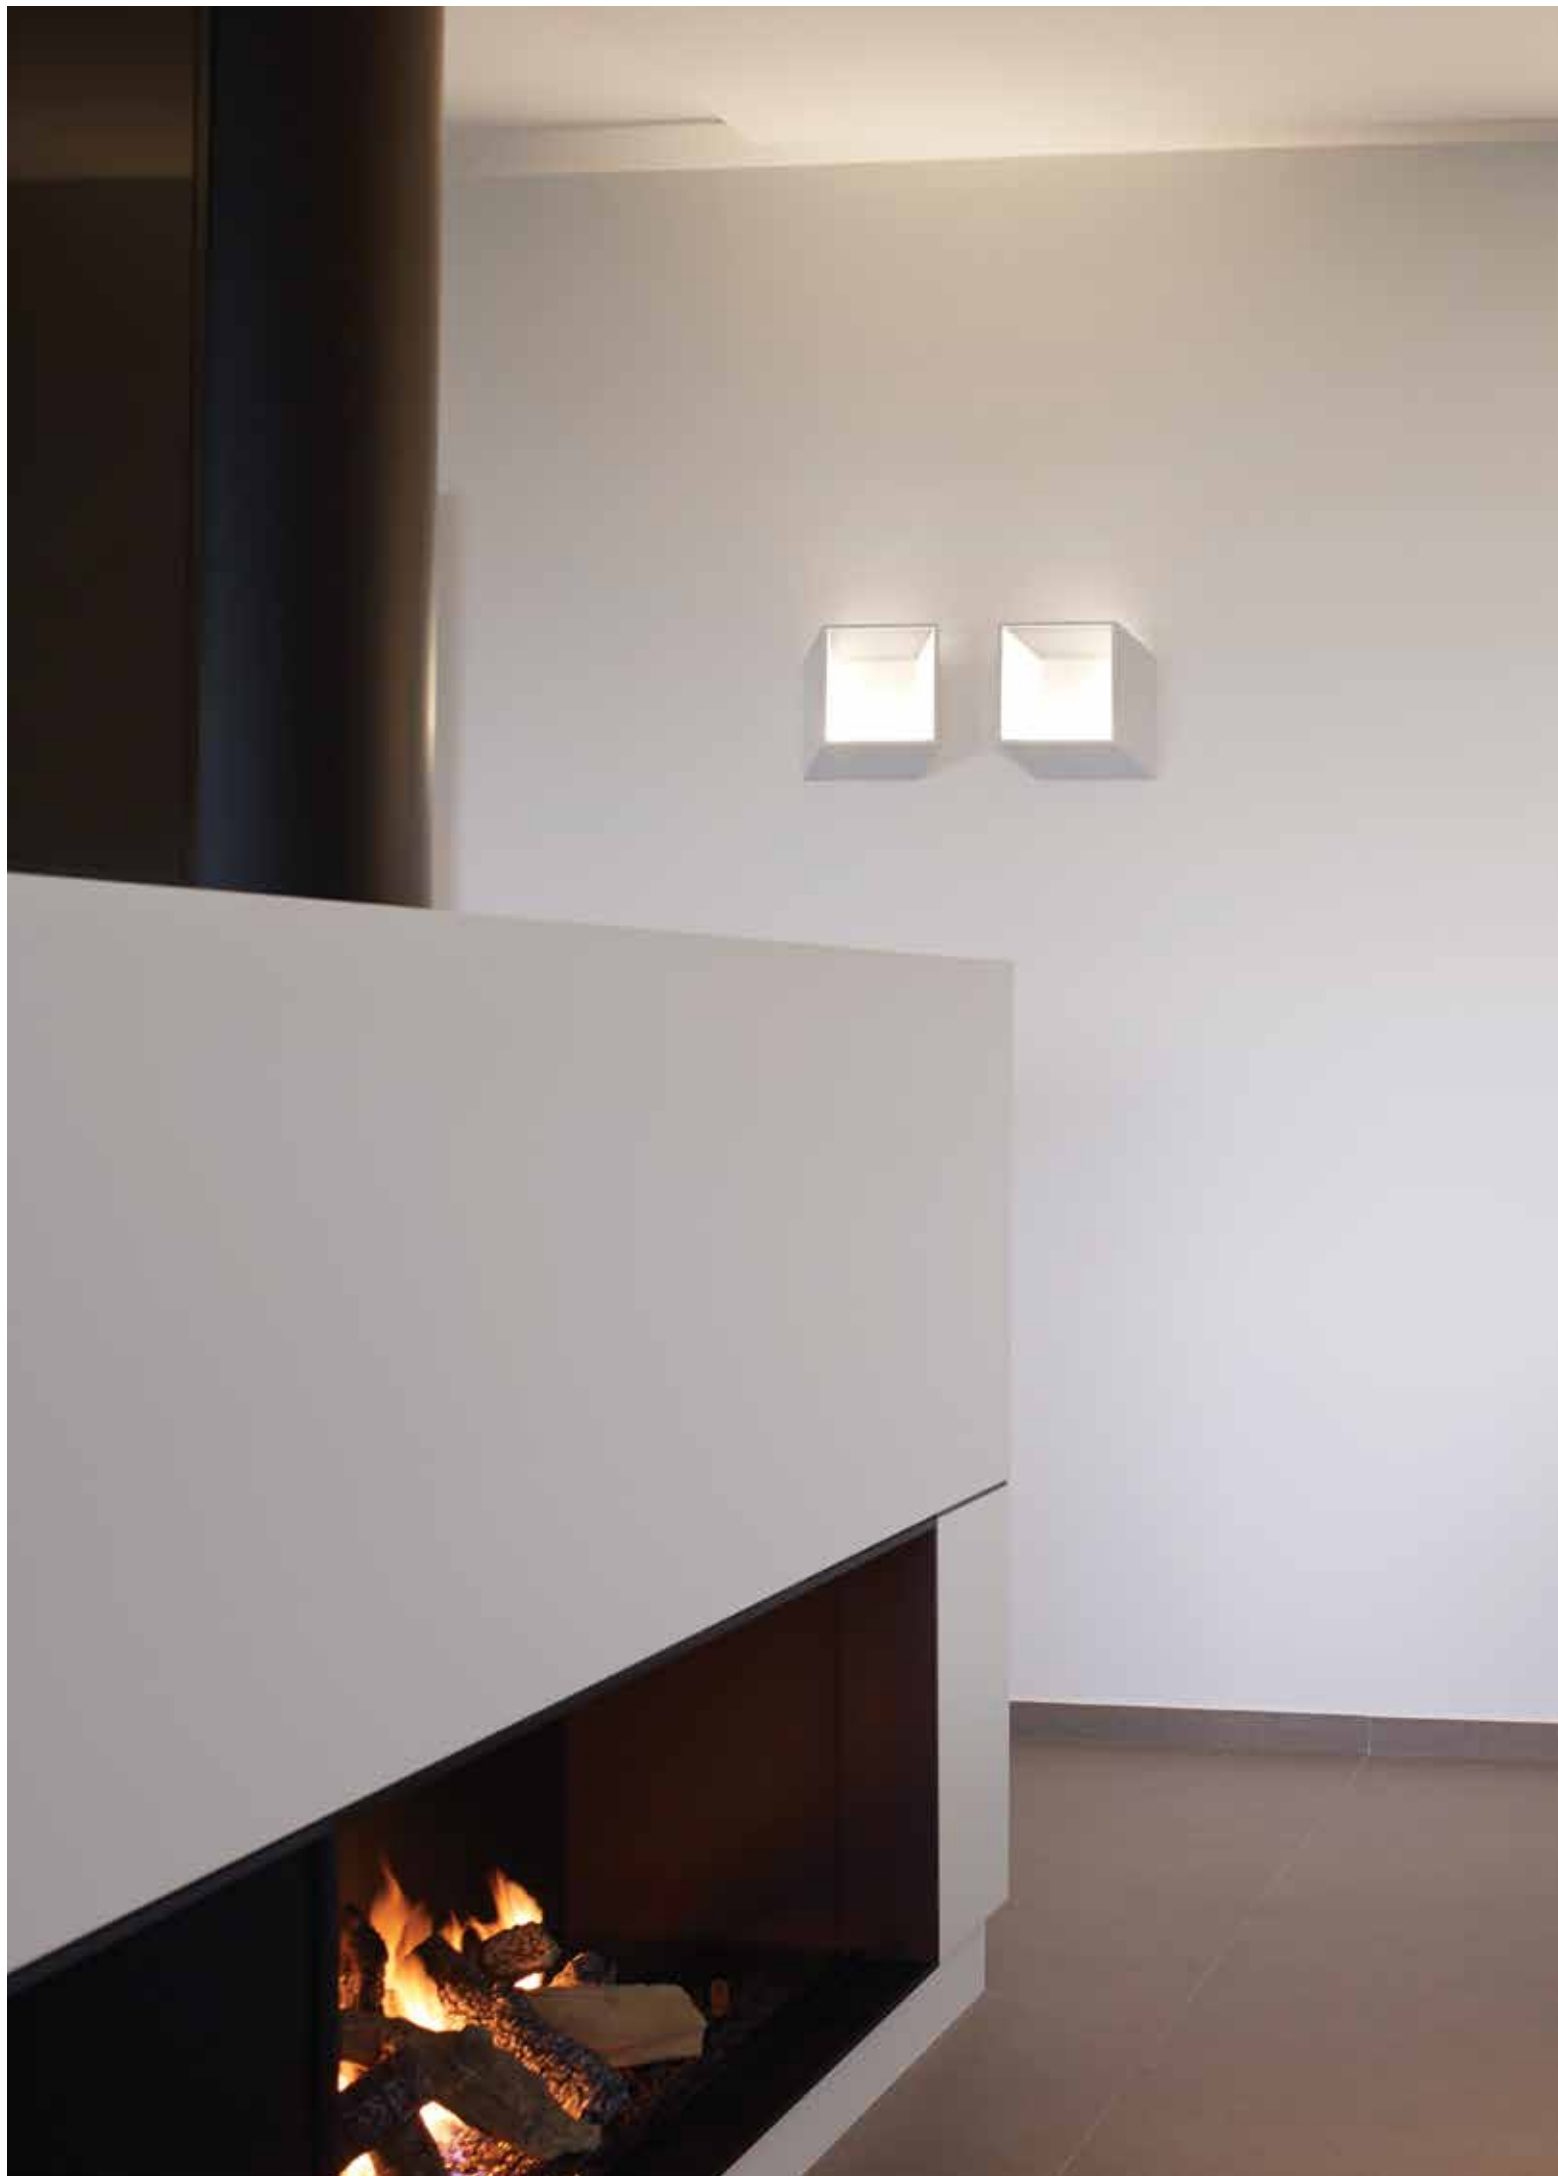





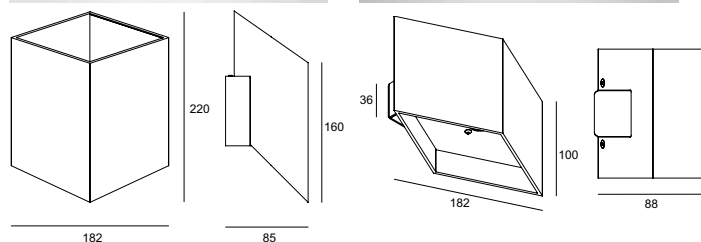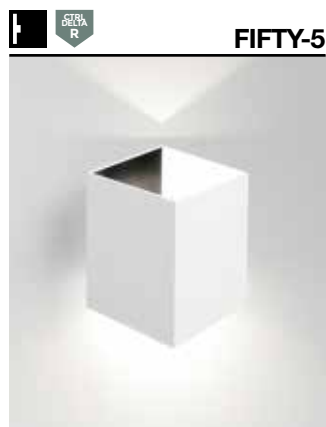

CRI > 90

FIFTY-5

3000
K

2 x LED 7,1W / 774lm / 350mA

FE

278 73 812 930 ED8 ◇
◇ = B-W / W-W

2700
K

2 x LED 7,1W / 743lm / 350mA

FE

278 73 812 920 ED8 ◇
◇ = B-W / W-W

INCL. 1 x INSERT B (FOR W-W)
INCL. 1 x INSERT MMAT (FOR B-W / W-W)
INCL. 1 x INSERT W (FOR B-W)
MAINS DIMMING (FE)
110-240V / 50-60Hz

CE 1.0 IP20

FIFTY LED

2 x LED 3W / 280lm / 350mA

278 77 93 ◇
◇ = B-MMAT / W-W

2 x LED 3W / 252lm / 350mA

278 77 92 ◇
◇ = B-MMAT / W-W

MAINS DIMMING (FE)
220-240V / 0/50-60Hz

CE 0.6 IP20





CRI > 90

3000
K


FE

2700
K

FE



BUTLER W

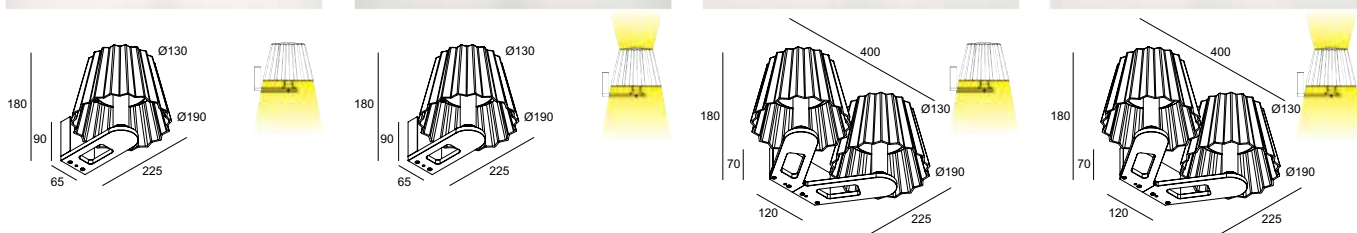



BUTLER W	BUTLER W DOWN-UP	BUTLER W D	BUTLER W D DOWN-UP
LED CLUSTER 16W / 1216lm	LED CLUSTER 6W / 500lm (UP) LED CLUSTER 10W / 760lm (DOWN)	2 x LED CLUSTER 16W / 1216lm	2 x LED CLUSTER 6W / 500lm (UP) 2 x LED CLUSTER 10W / 760lm (DOWN)
222 031 11 93 ED8 ◇ ◇ = A / ALU-B / B	222 031 12 93 ED8 ◇ ◇ = A / ALU-B / B	222 032 11 93 ED8 ◇ ◇ = A / B	222 032 12 93 ED8 ◇ ◇ = A / B
LED CLUSTER 16W / 1154lm	LED CLUSTER 6W / 475lm (UP) LED CLUSTER 10W / 725lm (DOWN)	2 x LED CLUSTER 16W / 1154lm	2 x LED CLUSTER 6W / 475lm (UP) 2 x LED CLUSTER 10W / 725lm (DOWN)
222 031 11 92 ED8 ◇ ◇ = A / ALU-B / B	222 031 12 92 ED8 ◇ ◇ = A / ALU-B / B	222 032 11 92 ED8 ◇ ◇ = A / B	222 032 12 92 ED8 ◇ ◇ = A / B
220-240V / 50-60Hz MAINS DIMMING (FE)	220-240V / 50-60Hz MAINS DIMMING (FE)	220-240V / 50-60Hz MAINS DIMMING (FE)	220-240V / 50-60Hz MAINS DIMMING (FE)
⚡ CE 1.3 IP56	⚡ CE 1.5 IP56	⚡ CE 2.8 IP56	⚡ CE 3.2 IP56

DESIGN BY ARIK LEVY & DELTA LIGHT®
WWW.DELTALIGHT.COM/BUTLERBYARIKLEVY





MONTUR S



CRI > 80

MONTUR S LED

3000 K

LED CLUSTER 6,3W / 808lm / 350mA

232 112 83 ◇
◇ = B

2700 K

NEW

LED CLUSTER 6,3W / 808lm / 350mA

232 112 82 ◇
◇ = B

INCL. GLASS OPAL
100-240V / 50-60Hz

◇ CE 2.0 IP65

MONTUR S O E27

ULTRA
DELTA
R

A60 max.40W

232 111 00 ◇
◇ = B


E27Ls / 100-240V / 50-60Hz

◇ CE 1.1 IP20

OPTIONS
LED SOLUTION - PAG TEC 4-5



MONTUR M



CRI > 80

MONTUR M LED

3000
K

LED CLUSTER 6,3W / 840lm / 350mA

232 212 83 ◇
◇ = B

2700
K


NEW

LED CLUSTER 6,3W / 840lm / 350mA

232 212 82 ◇
◇ = B

INCL. GLASS OPAL
100-240V / 50-60Hz

◇ CE 2,6 IP65



MONTUR M E27


A60 max.40W

232 213 00 ◇
◇ = B

INCL. GLASS CLEAR
E27Ls / 100-240V / 50-60Hz

◇ CE 2,5 IP65

OPTIONS
LED SOLUTION - PAG TEC 4-5



MONTUR M O E27

A60 max.40W

232 211 00 ◇
◇ = B

E27Ls / 100-240V / 50-60Hz


◇ CE 1,3 IP20

OPTIONS
LED SOLUTION - PAG TEC 4-5





MONTUR L

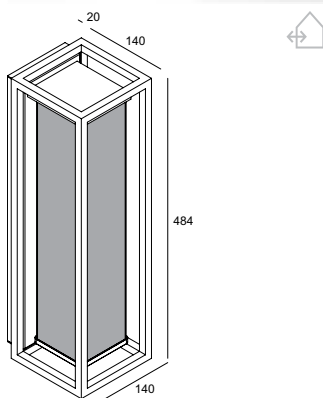

CRI > 80

MONTUR L PC LED


3000
K

LED CLUSTER 14,7W / 1960lm / 700mA

232 318 83 ◇
◇ = B

INCL. PC OPAL
220-240V / 0 | 50-60Hz

◇ CE 2.6 IP54

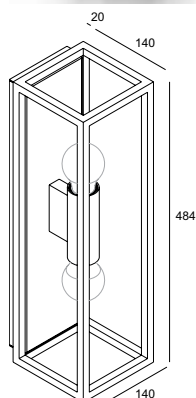

MONTUR L O E27

2 x A60 max.40W

232 321 00 ◇
◇ = B


2 x E27Ls / 100-240V / 50-60Hz

◇ CE 1.8 IP20

OPTIONS
LED SOLUTION - PAG TEC 4-5



SONTUR L

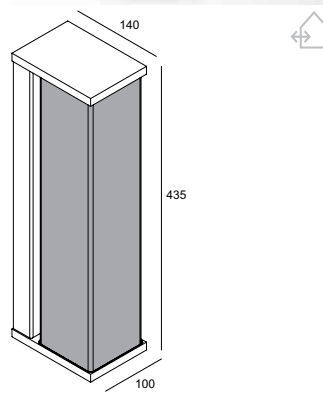

CRI > 80

SONTUR L PC LED


3000
K

LED CLUSTER 14,7W / 1960lm / 700mA

232 008 83 ◇
◇ = B

INCL. PC OPAL
220-240V / 0 | 50-60Hz

◇ CE 1.5 IP54

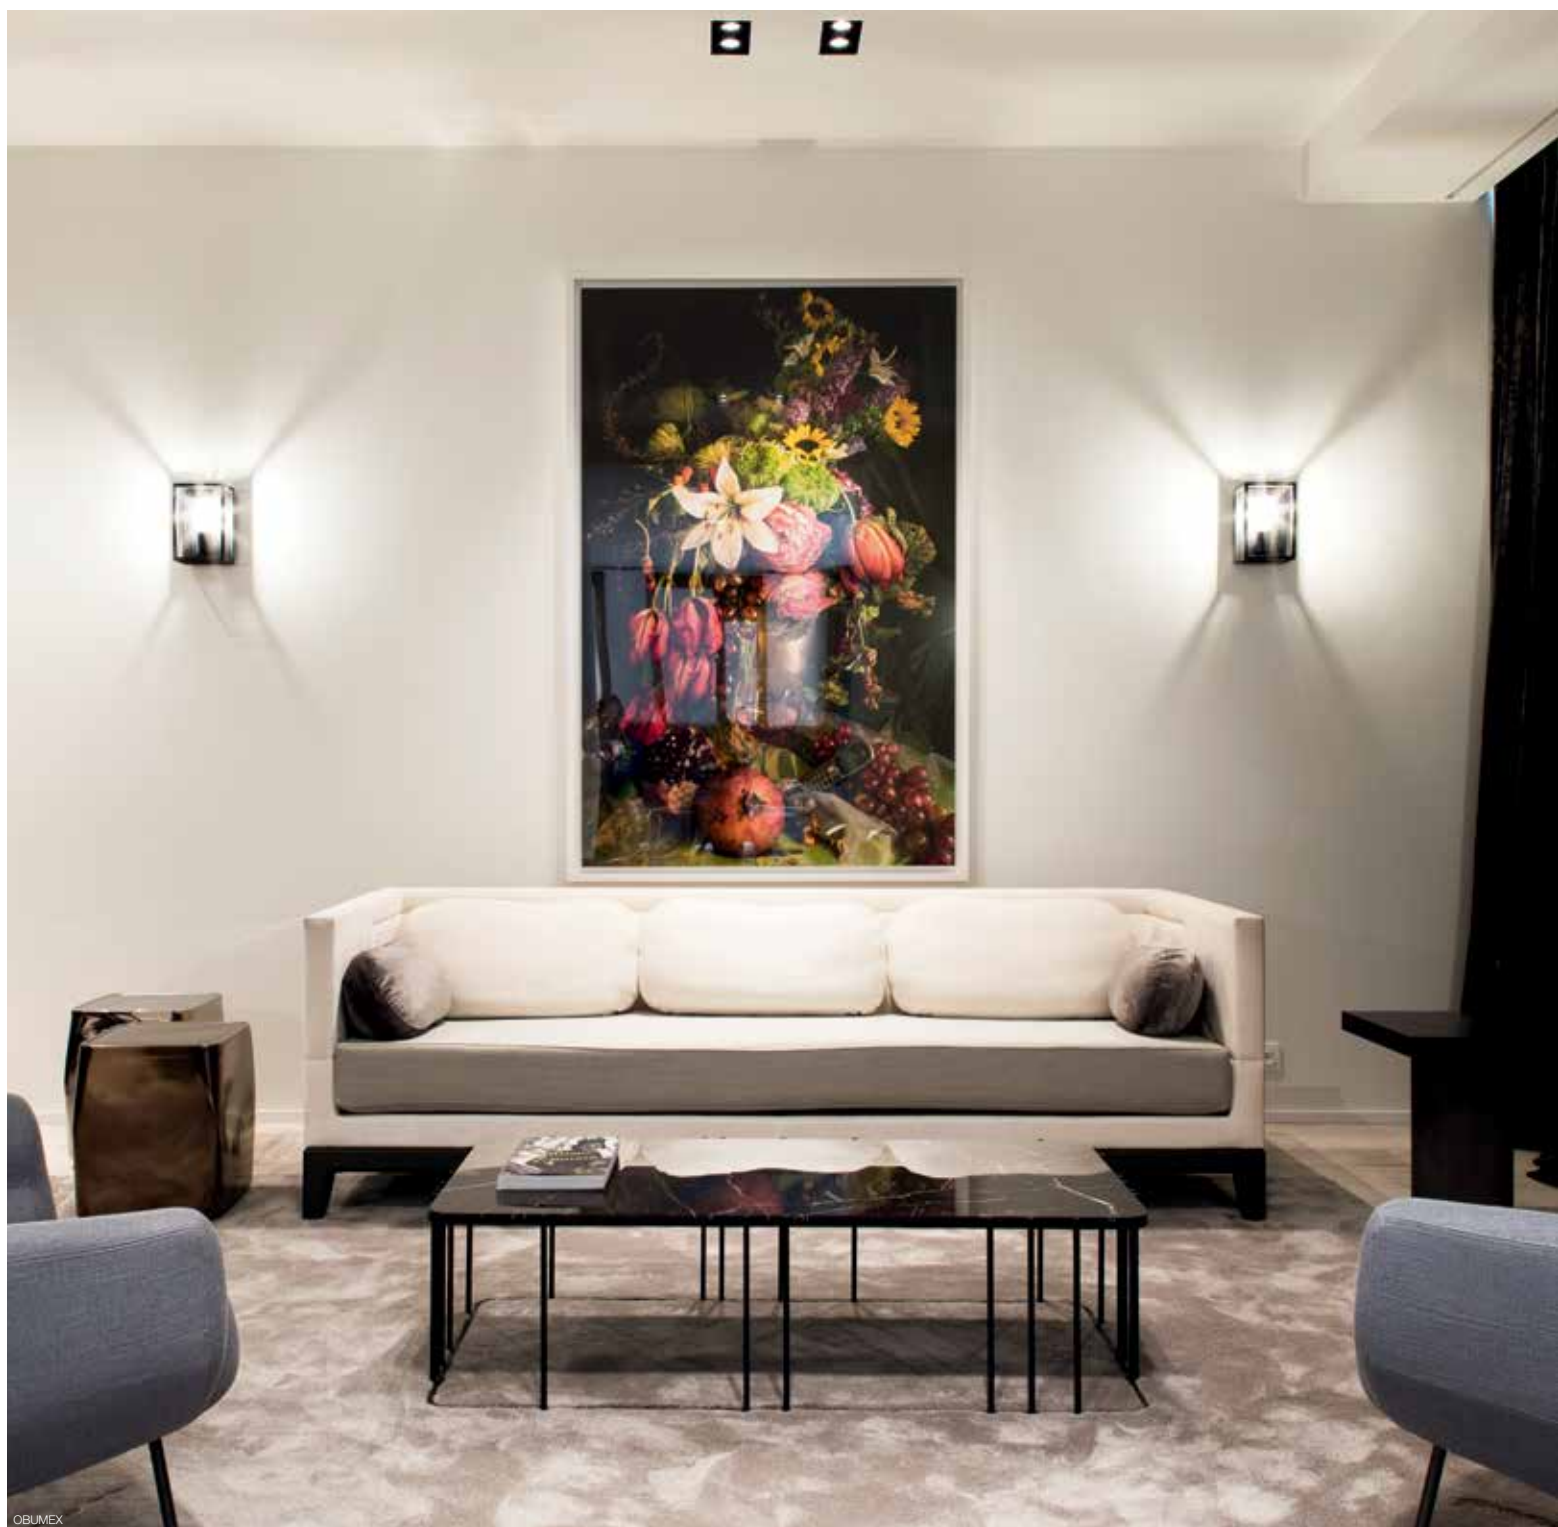

OBUVEX



BEN ADAMS ARCHITECTS

HOME ARCHITECTS - THE INTERIOR OF AN ESTATE





CRI > 80

MONTUR SQL LED

3000
K

LED CLUSTER 7,4W / 1000lm / 350mA

232 812 83 ◇
◇ = B

2700
K

LED CLUSTER 7,4W / 1000lm / 350mA

232 812 82 ◇
◇ = B

INCL. GLASS OPAL
100-240V / 50-60Hz

◇ CE 2,1 IP65

MONTUR R LED

LED CLUSTER 6,3W / 840lm / 350mA

232 712 83 ◇
◇ = B

LED CLUSTER 6,3W / 840lm / 350mA

232 712 82 ◇
◇ = B

INCL. GLASS OPAL
100-240V / 50-60Hz

◇ CE 2,1 IP65

SONTUR R LED

LED CLUSTER 6,3W / 840lm / 350mA

232 711 83 ◇
◇ = B

LED CLUSTER 6,3W / 840lm / 350mA

232 711 82 ◇
◇ = B




INCL. GLASS OPAL
100-240V / 50-60Hz

◇ CE 1,8 IP65





WANT-IT



CRI > 90

WANT-IT S X

3000 K

2 x LED 4,7W / 542lm / 240mA



275 14 812 930 ◇
◇ = W



2700 K


2 x LED 4,7W / 520lm / 240mA



275 14 812 920 ◇
◇ = W



110-240V / 50-60Hz



WANT-IT S


2 x LED 3W / 280lm / 350mA

275 12 82 93 ED8 ◇
◇ = B-MMAT / W-W

2 x LED 3W / 252lm / 350mA

275 12 82 92 ED8 ◇
◇ = B-MMAT / W-W

MAINS DIMMING (FE)
220-240V / 0/50-60Hz



WANT-IT L


2 x LED 3W / 280lm / 350mA


275 13 82 93 ED8 ◇
◇ = B-MMAT / W-W




2 x LED 3W / 252lm / 350mA

275 13 82 92 ED8 ◇
◇ = B-MMAT / W-W

MAINS DIMMING (FE)
220-240V / 0/50-60Hz



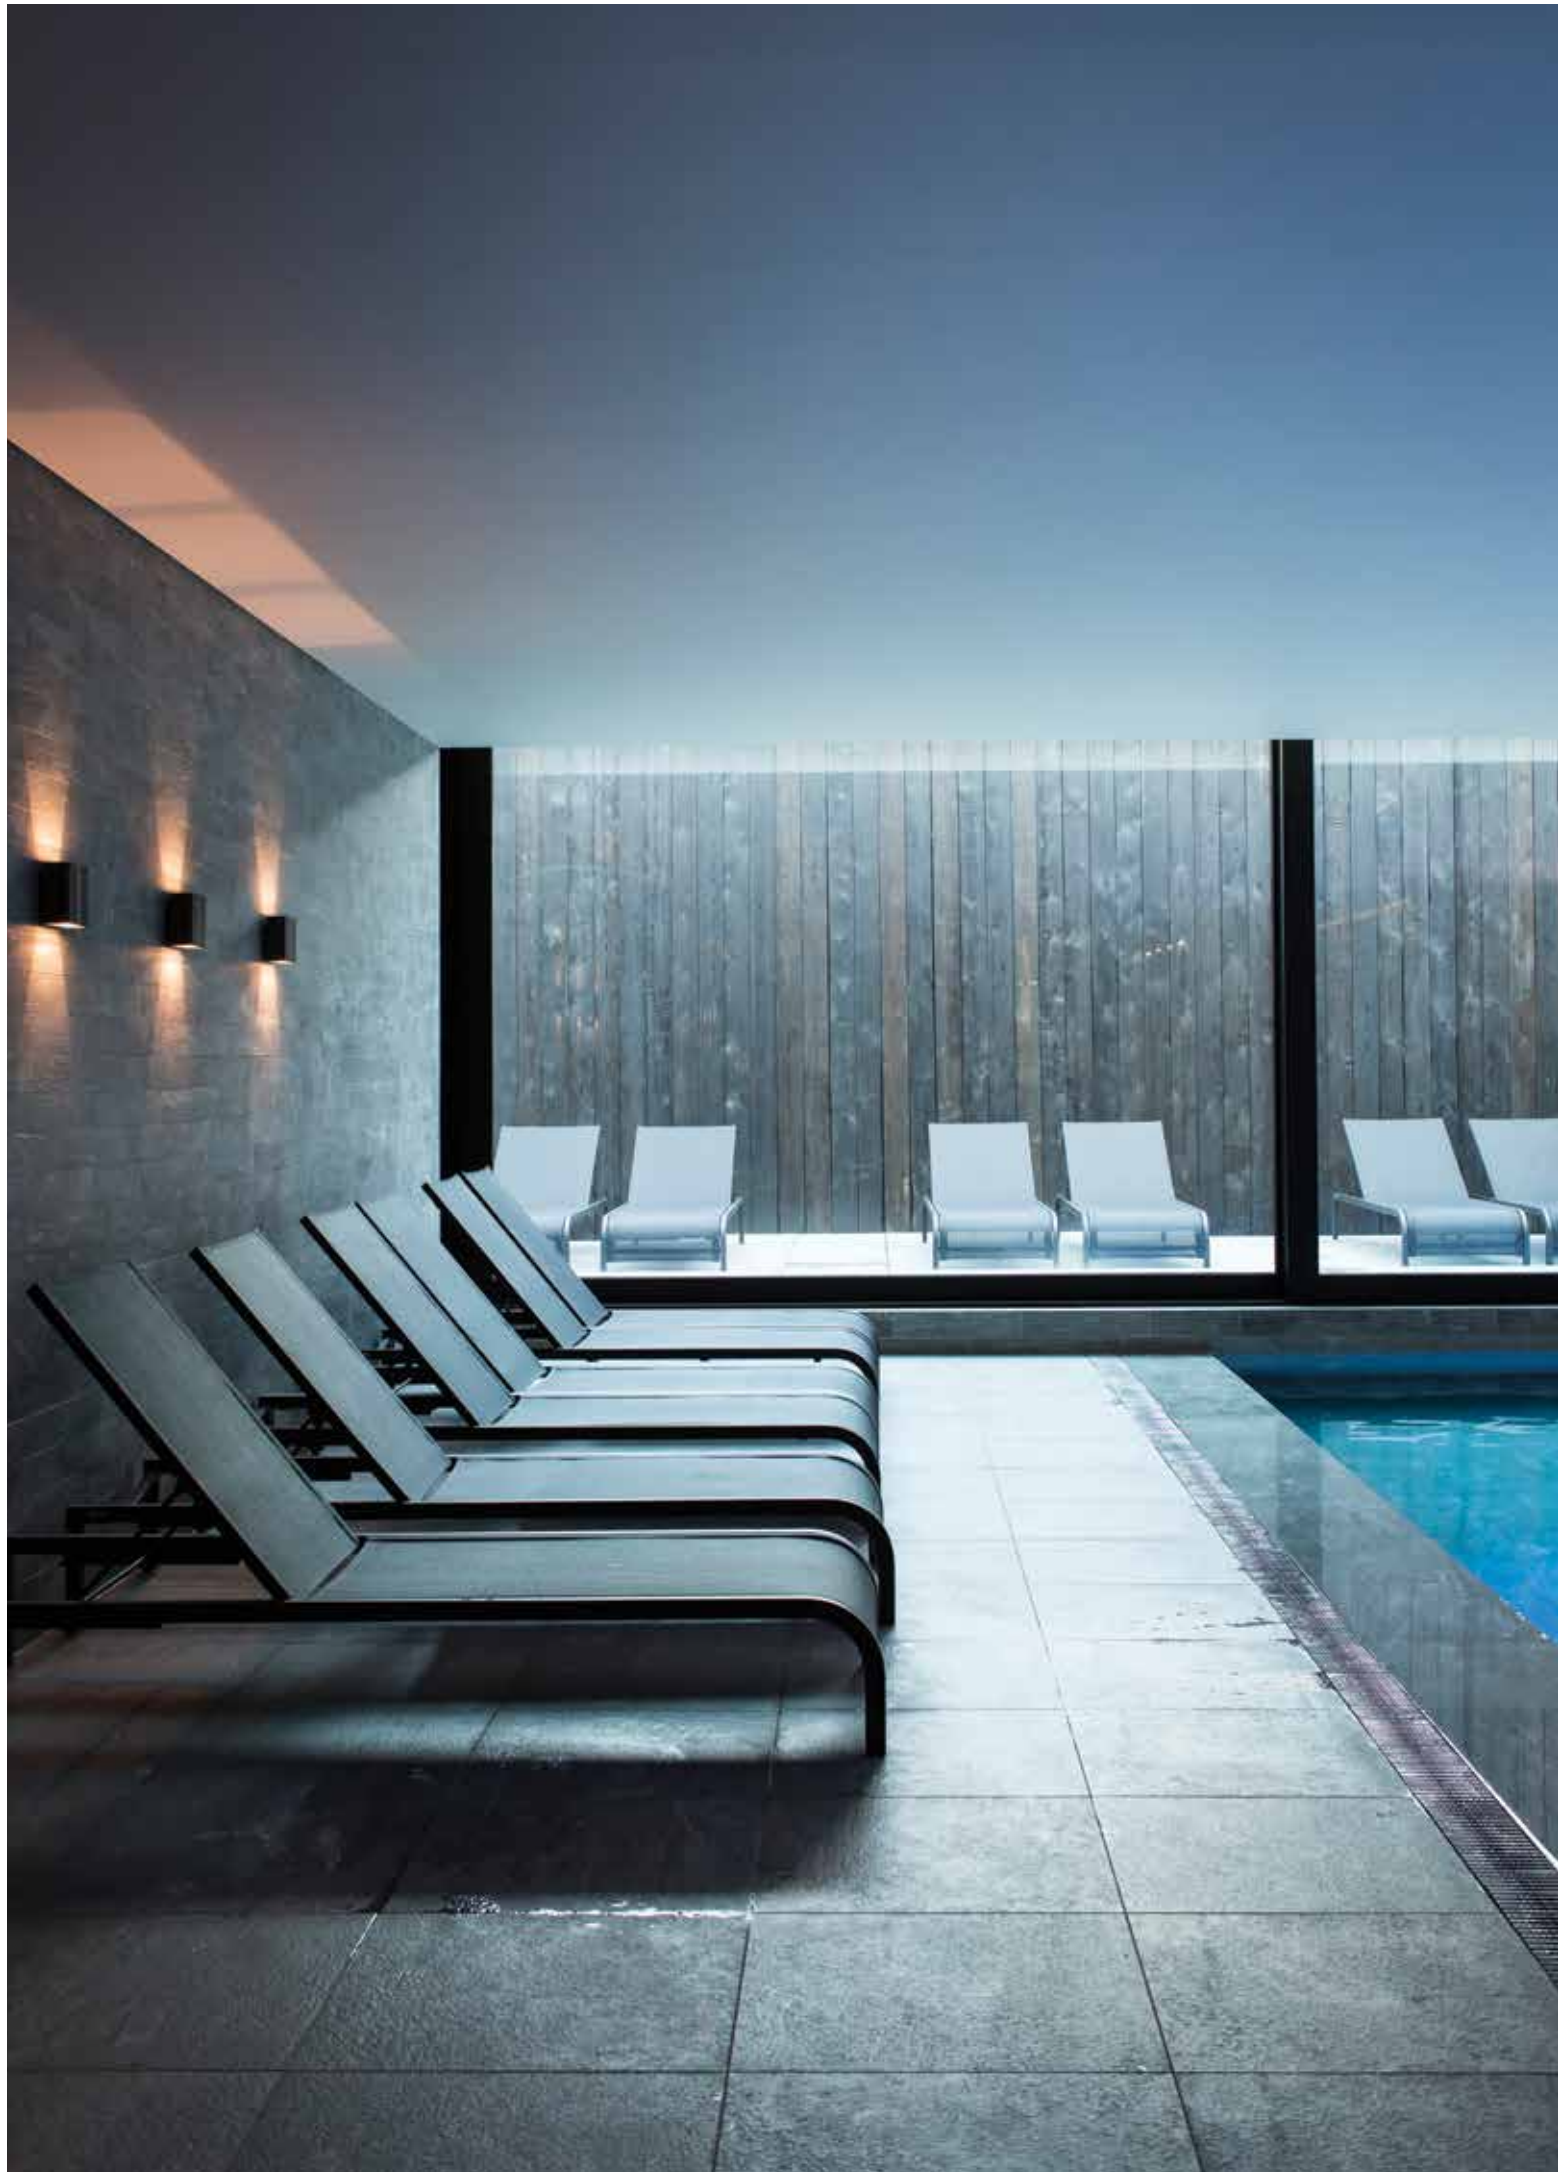

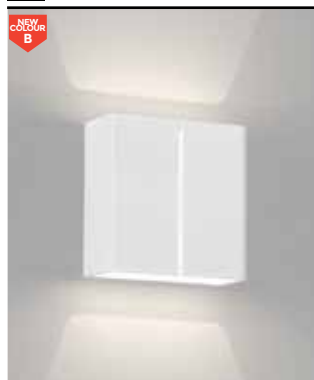**VISA**

CRI > 80

VISA LED

3000
K

4 x LED 1,1W / 120lm / 350mA

275 07 24 ◇
◇ = B / W

2700
K NEW

4 x LED 1,1W / 115lm / 350mA

275 07 34 ◇
◇ = B / W


120-240V / 50-60Hz





LIN 2 x QT14 max.60W

275 07 42 ◇
◇ = W




G9 / 100-240V / 50-60Hz





CRI > 90	GALA S LED	GALA L OK LED
	LED 7,1W / 774lm / 350mA	2 x LED 4,7W / 542lm / 240mA
3000 K	275 11 811 930 ◇ ◇ = A / W	275 04 812 930 ◇ ◇ = A / N / W
2700 K NEW	LED 7,1W / 743lm / 350mA	2 x LED 4,7W / 520lm / 240mA
	275 11 811 920 ◇ ◇ = A / W	275 04 812 920 ◇ ◇ = A / N / W
	100-240V / 50-60Hz □ CE 0.7 IP20	ADJUSTABLE 20° 100-240V / 50-60Hz □ CE 1.0 IP55


GALA



CRI > 80	GALA L LED	GALA LED	GALA
	LED CLUSTER 6,3W / 840lm / 350mA	4 x LED 1,1W / 120lm / 350mA	
3000 K	275 04 52 ◇ ◇ = A / N / W	275 04 24 ◇ ◇ = B / W	1 x QT-DE12s max.150W
2700 K NEW	LED CLUSTER 6,3W / 840lm / 350mA	4 x LED 1,1W / 115lm / 350mA	275 04 01 ◇ ◇ = ALU / W
	275 04 53 ◇ ◇ = A / N / W	275 04 34 ◇ ◇ = B / W	R7s / 100-240V / 50-60Hz
	100-240V / 50-60Hz ◇ CE 0,8 IP65	100-240V / 50-60Hz ◇ CE 0,6 IP20	◇ CE 0,5 IP20 0,5







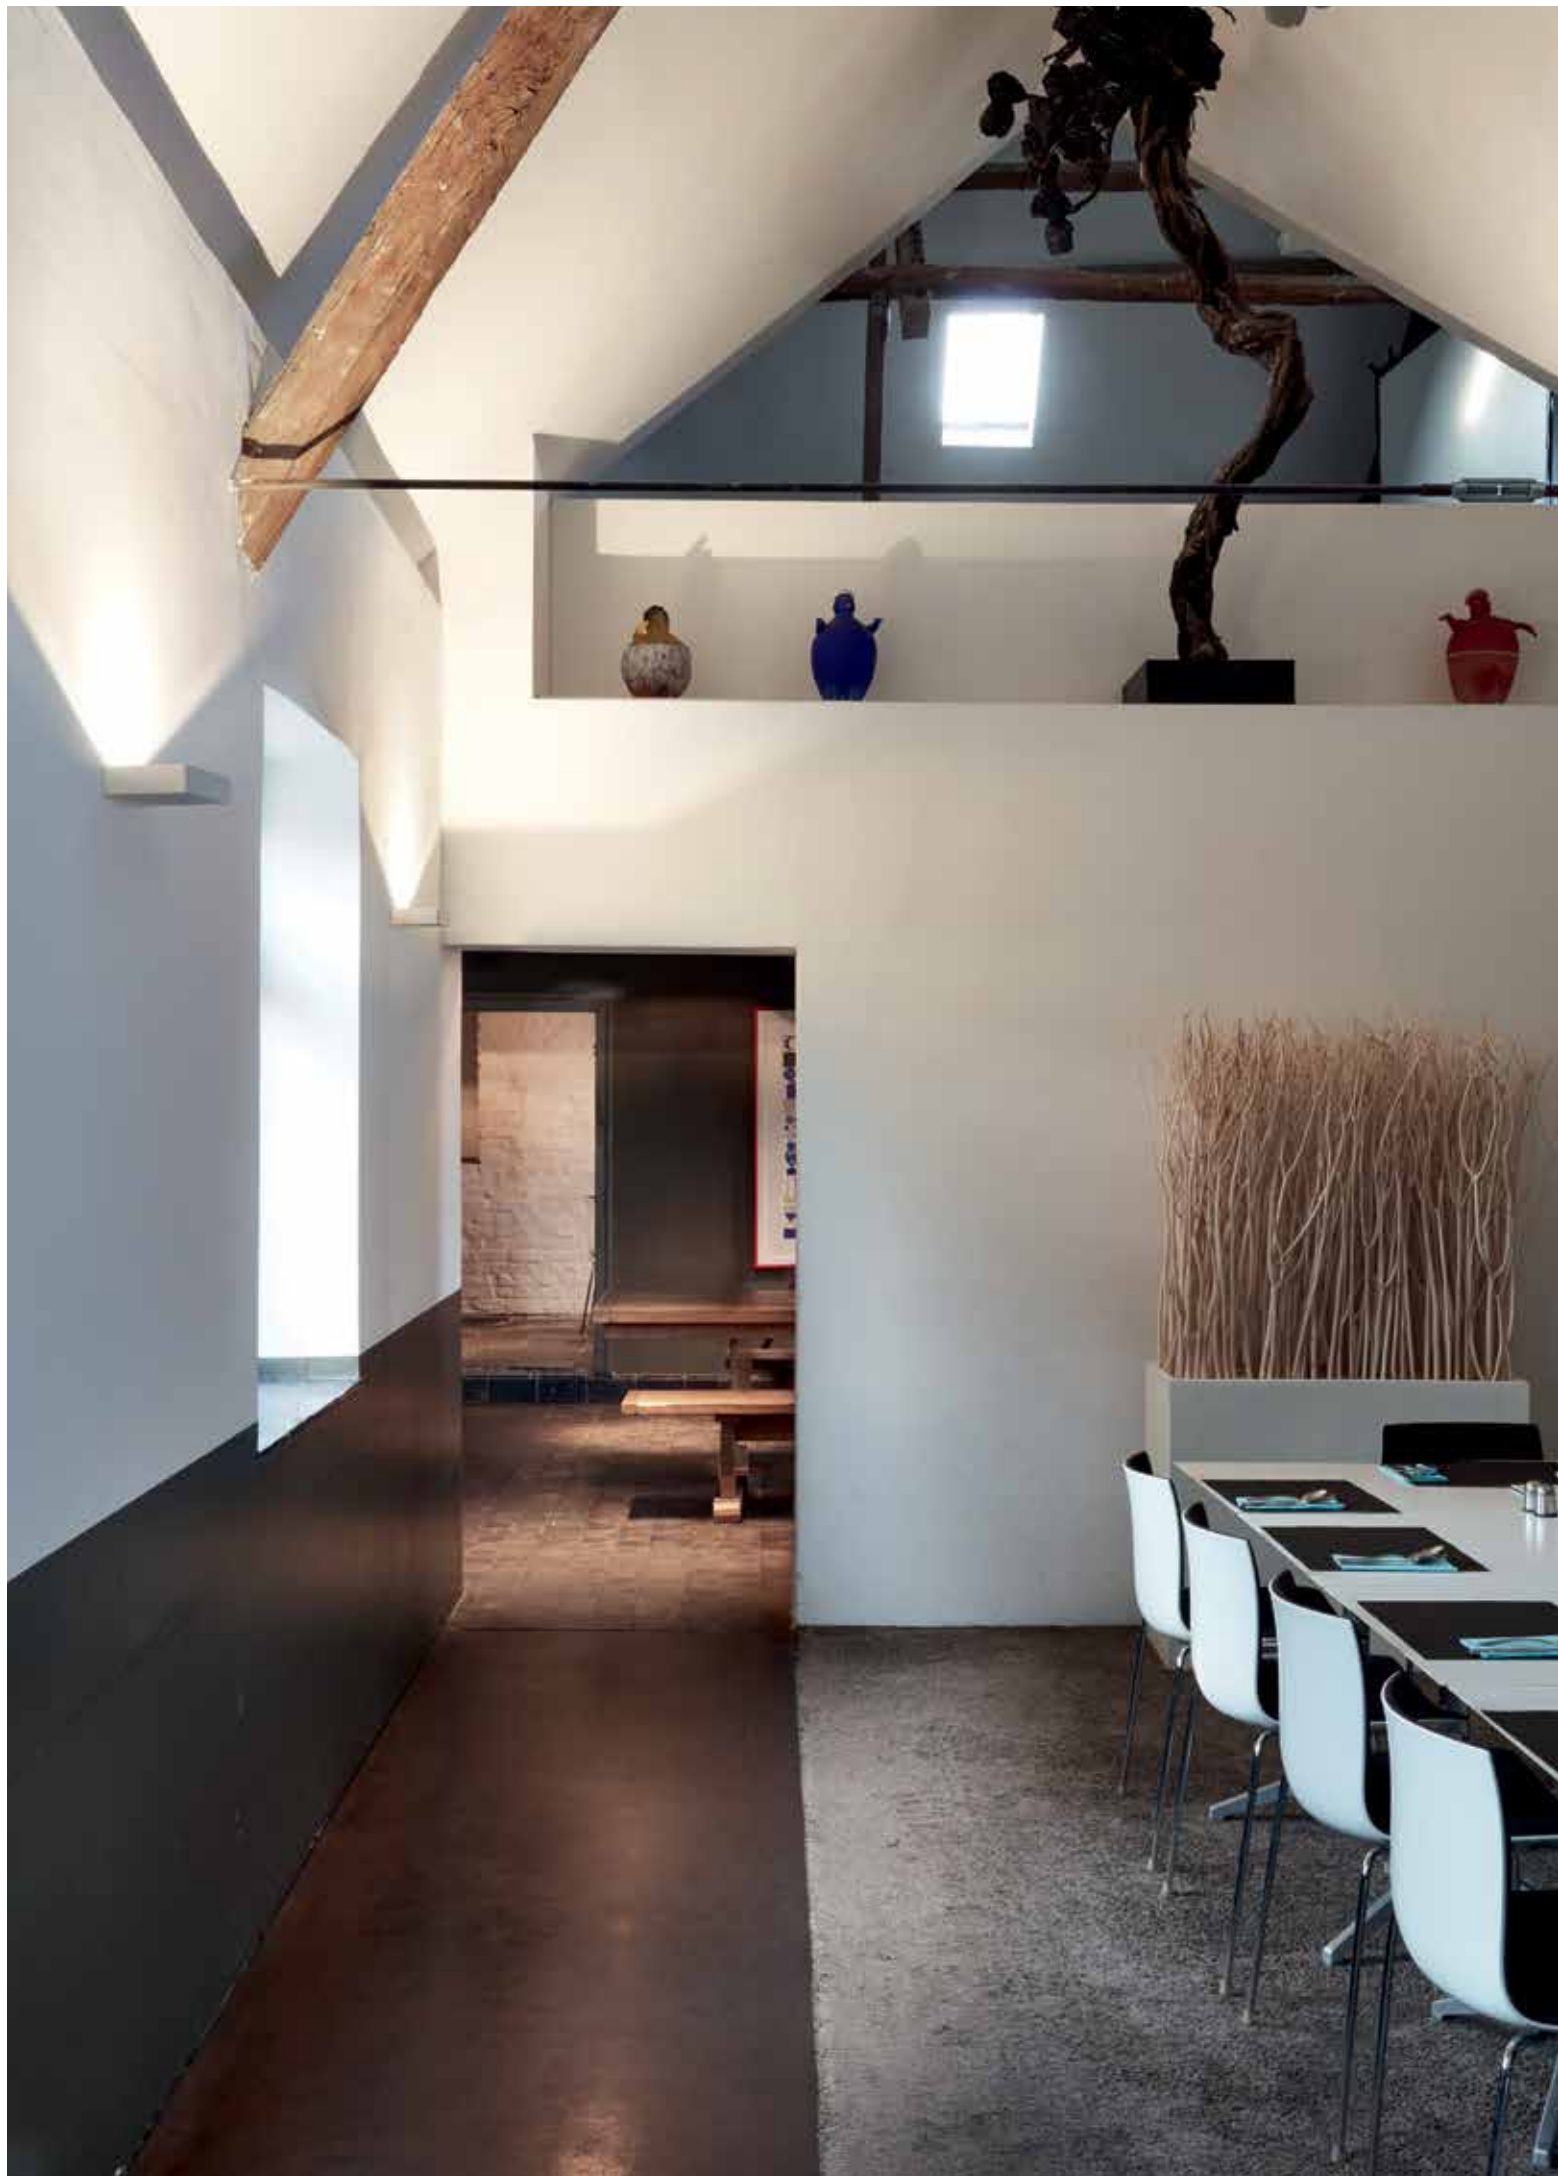



GALA XL

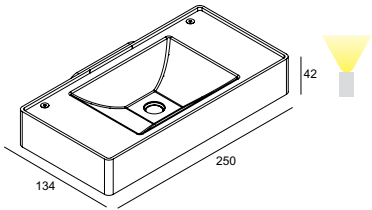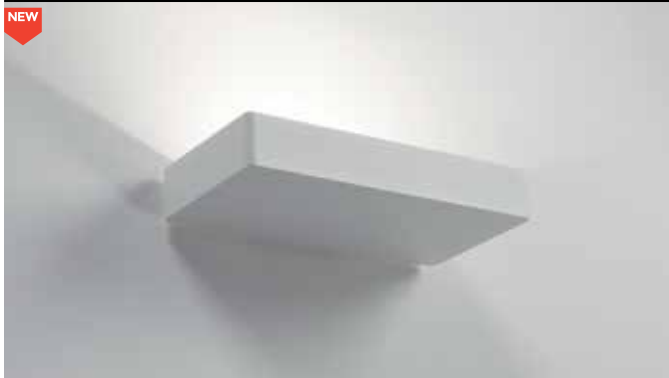

CRI > 90

GALA XL

GALA XL HP

3000
K

LED 13,8W / 1232lm / 500mA

LED 32,6W / 3337lm / 850mA

1-10V

275 162 93 ED1 ◇
◇ = W

FE

275 161 93 ED8 ◇
◇ = W

MAINS DIMMING
220-240V / 50-60Hz
◇ CE 1,2 IP20



220-240V / 50-60Hz
◇ CE 1,2 IP20





WA-T

NEW

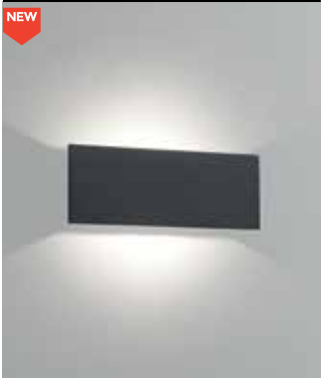

CRI > 90

WA-T

3000
K

LED 7,5W / 700lm / 500mA

275 15 93 ◇
◇ = B-MMAT / W-W

100-240V / 50-60Hz

◇ CE 0,9 IP20

CRI > 90

WA-T SOFT

2000
3000
K

SOFT DIM

LED 9,5W / 690lm / 250mA

FE

CTRL
DELTA
R

275 15 1902 ED8 ◇
◇ = B-MMAT / W-W

MAINS DIMMING (FE)
220-240V / 50-60Hz


◇ CE 0,9 IP20







GABOO W



CRI > 80

GABOO W

3000
K

LED CLUSTER UP 6,3W / 725lm / 350mA
LED CLUSTER DOWN 6,3W / 725lm / 350mA

FE

286 64 22 ◇
◇ = W

MAINS DIMMING (FE)
100-240V / 50-60Hz

□ CE 0,9 IP20





CRI > 80

VIKTOR

3000
K

LED CLUSTER 8,4W / 580lm / 350mA

223 80 12 ◇
◇ = A / N / W

220-240V / 50-60Hz

◇ CE 0,5 IP65

CRI > 90

SKELP ON LED

3000
K

LED 7,1W / 774lm / 350mA

320 03 811 930 ◇
◇ = W

100-240V / 50-60Hz



□ CE 0,7 IP20







ULTRA X LED



CRI > 90


3000
K

ULTRA X LED

LED 7,1W / 774lm / 350mA

279 61 811 930 ◇
◇ = A / N / W

100-240V / 50-60Hz




ULTRA X DOWN-UP LED

2 x LED 7,1W / 774lm / 350mA

279 61 812 930 ◇
◇ = A / N / W

220-240V / 50-60Hz





FULL INFO
TECHNICAL CHAPTER

ACCESSORIES

CLIP 50 ◇
201 30 98 ◇
◇ = A / B / W

Ø50 / H12




GLASS SBL 50
201 30 05

Ø50



ULTRA W



ULTRA W

LED QT14 max.60W


279 81 40 ◇
◇ = W

G9 / 100-240V / 50-60Hz

◇ CE 0,4 IP20 0,1



ULTRA TW



ULTRA TW HP

LED QT14 max.60W


279 51 40 ◇
◇ = W

G9 / 100-240V / 50-60Hz

◇ CE 0,3 IP20 0,1



NEC+ULTRA



NEC+ULTRA 250 Hi

2 x QPAR51 max.50W

279 52 62 ◇
◇ = W

GU10 / 100-240V / 50-60Hz

◇ CE 1,0 IP20 0,5


ACCESSORIES
CLIP 50
GLASS SBL 50



NEC + ULTRA





NEC + ULTRA + CLIP 50 + GLASS SBL 50

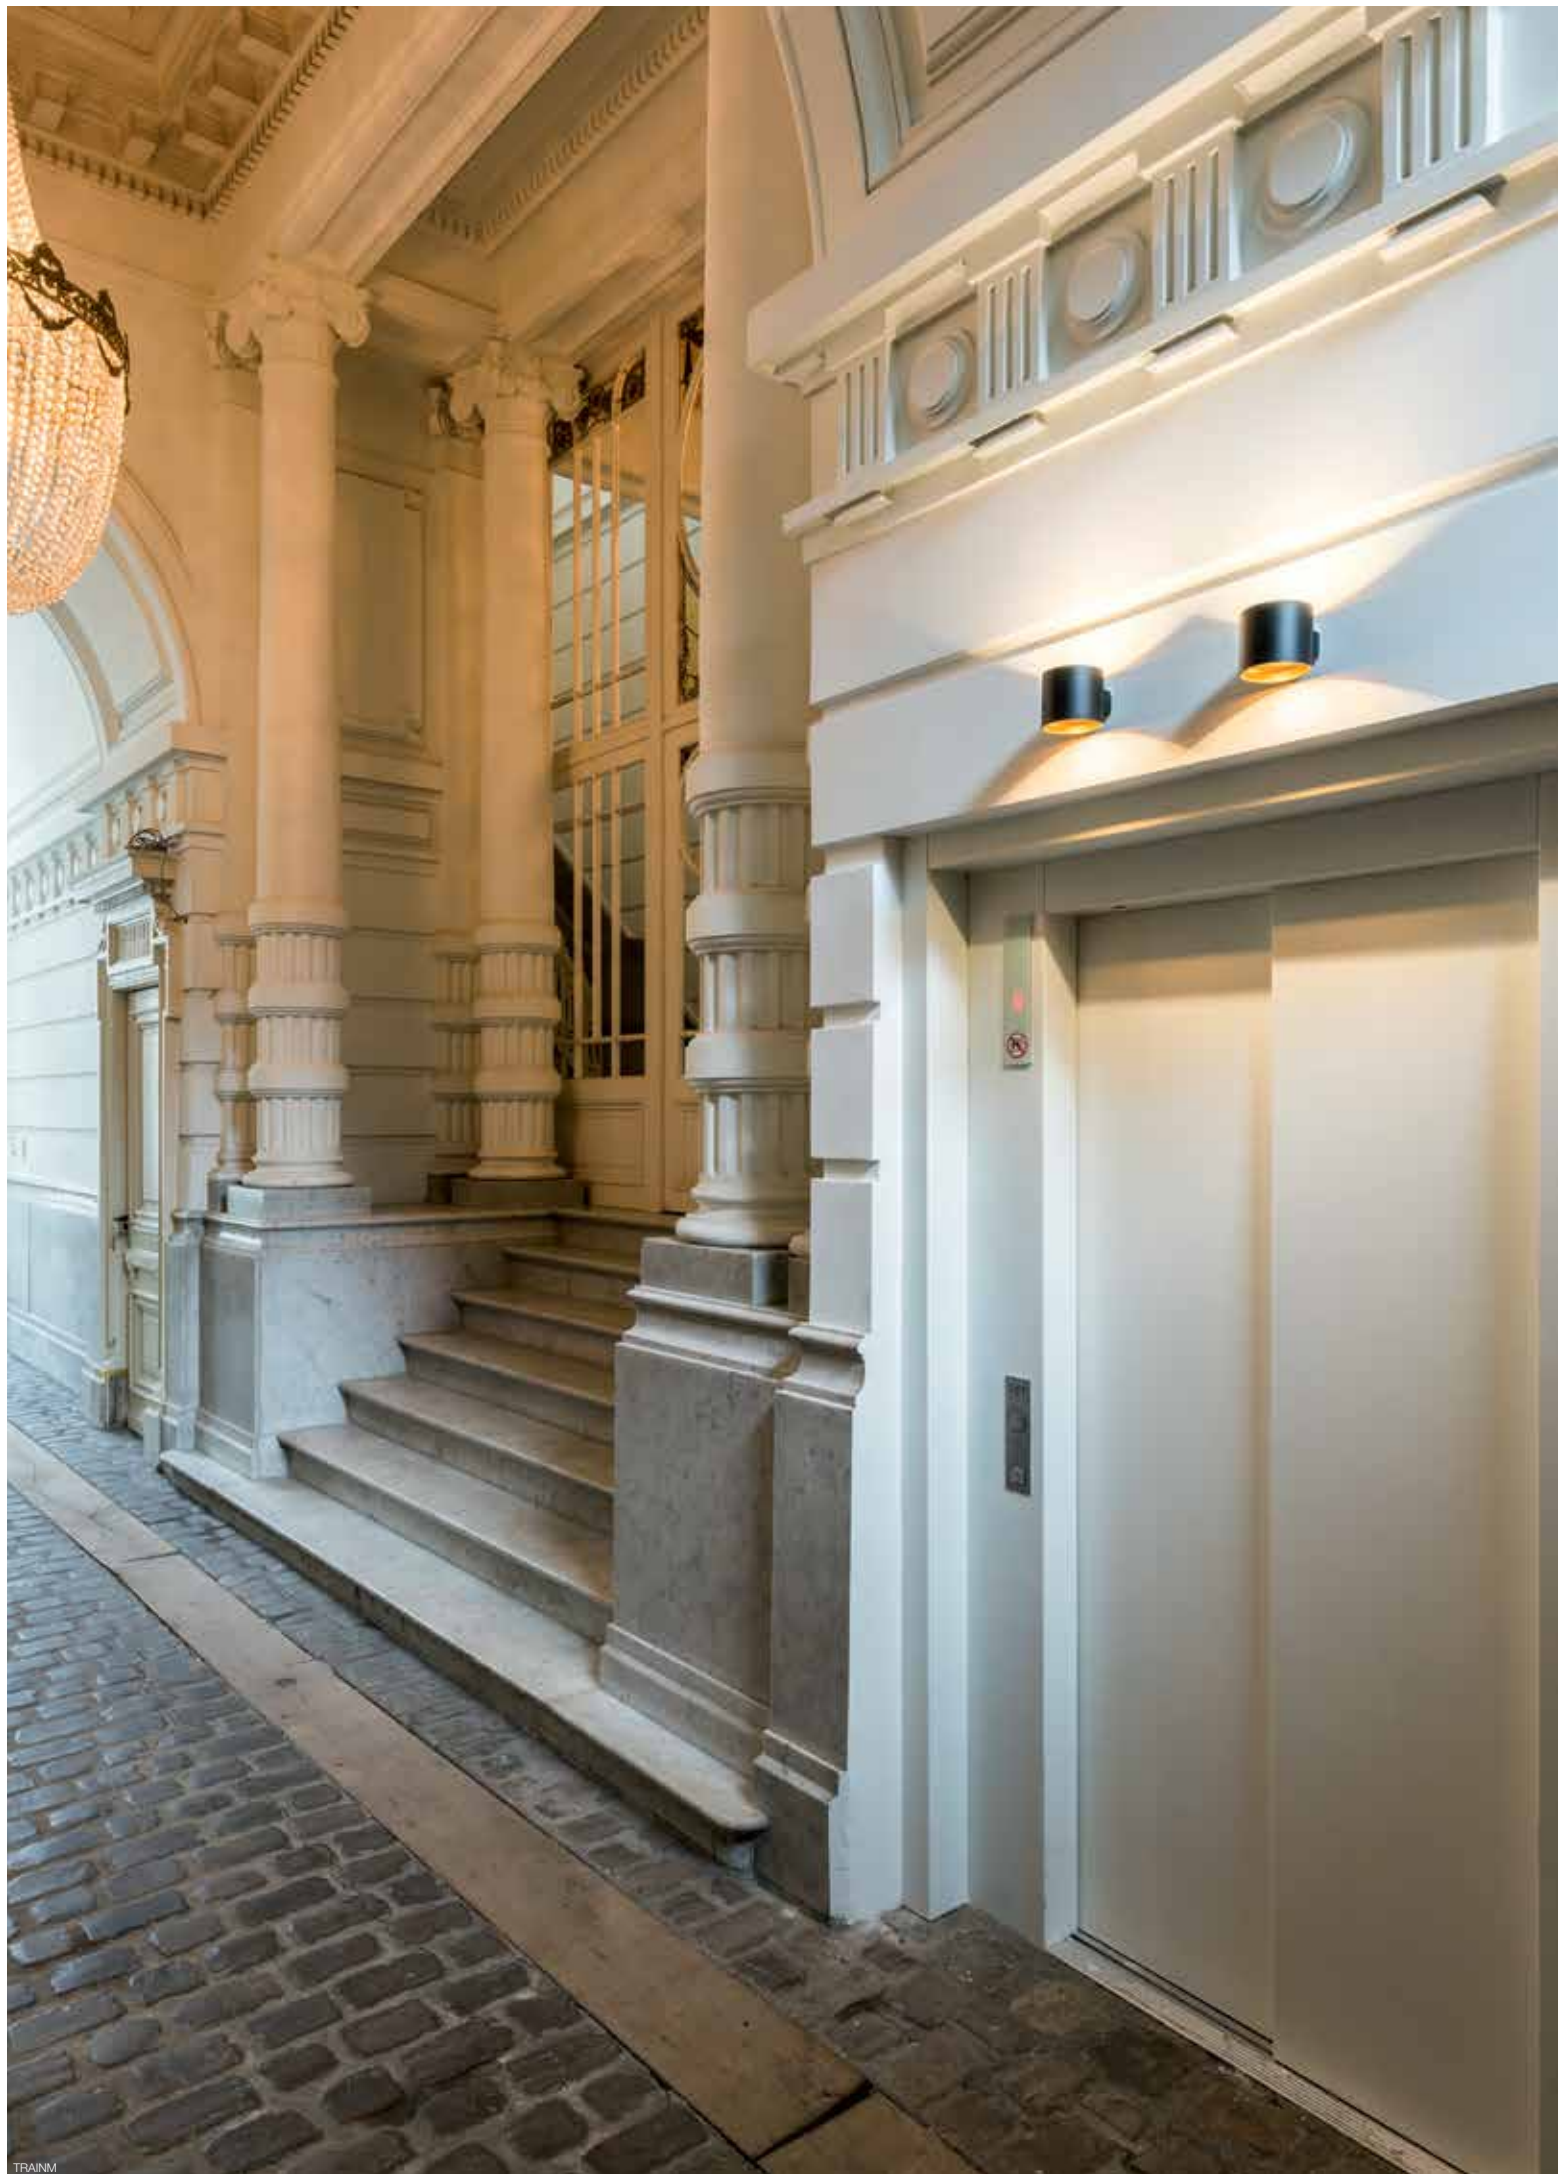



ORBIT LED



CRI > 90

ORBIT T LED

ORBIT LED

3000 K

LED 3W / 484lm / 24V-DC

2 x LED 3W / 280lm / 350mA



271 05 93 ◇
◇ = B-MMAT / W-W

271 04 93 ED8 ◇
◇ = B-MMAT / W-W



2700 K

LED 3W / 484lm / 24V-DC

2 x LED 3W / 252lm / 350mA



271 05 92 ◇
◇ = B-MMAT / W-W

271 04 92 ED8 ◇
◇ = B-MMAT / W-W



220-240V / 50-60Hz

◇ CE 0,6 IP20

MAINS DIMMING (FE)
220-240V / 0/150-60Hz

□ CE 0,5 IP20





ORBIT T LED





VISION



CRI > 80

VISION LED

3000
K

2 x LED 1,6W / 168lm / 500mA

278 25 22 ◇
◇ = W / W-C

2700
K **NEW**

2 x LED 1,6W / 160lm / 500mA

278 25 23 ◇
◇ = W / W-C

100-240V / 50-60Hz

◇ CE 0,9 IP20

VISION

CTE
DESIGN
R

LED QT14 max.60W

278 25 40 ◇
◇ = W / W-C

G9 / 100-240V / 50-60Hz

□ CE 0,9 IP20 0,5




VISION W-C




ABC PROJECTS - ANJA VERBOEVE



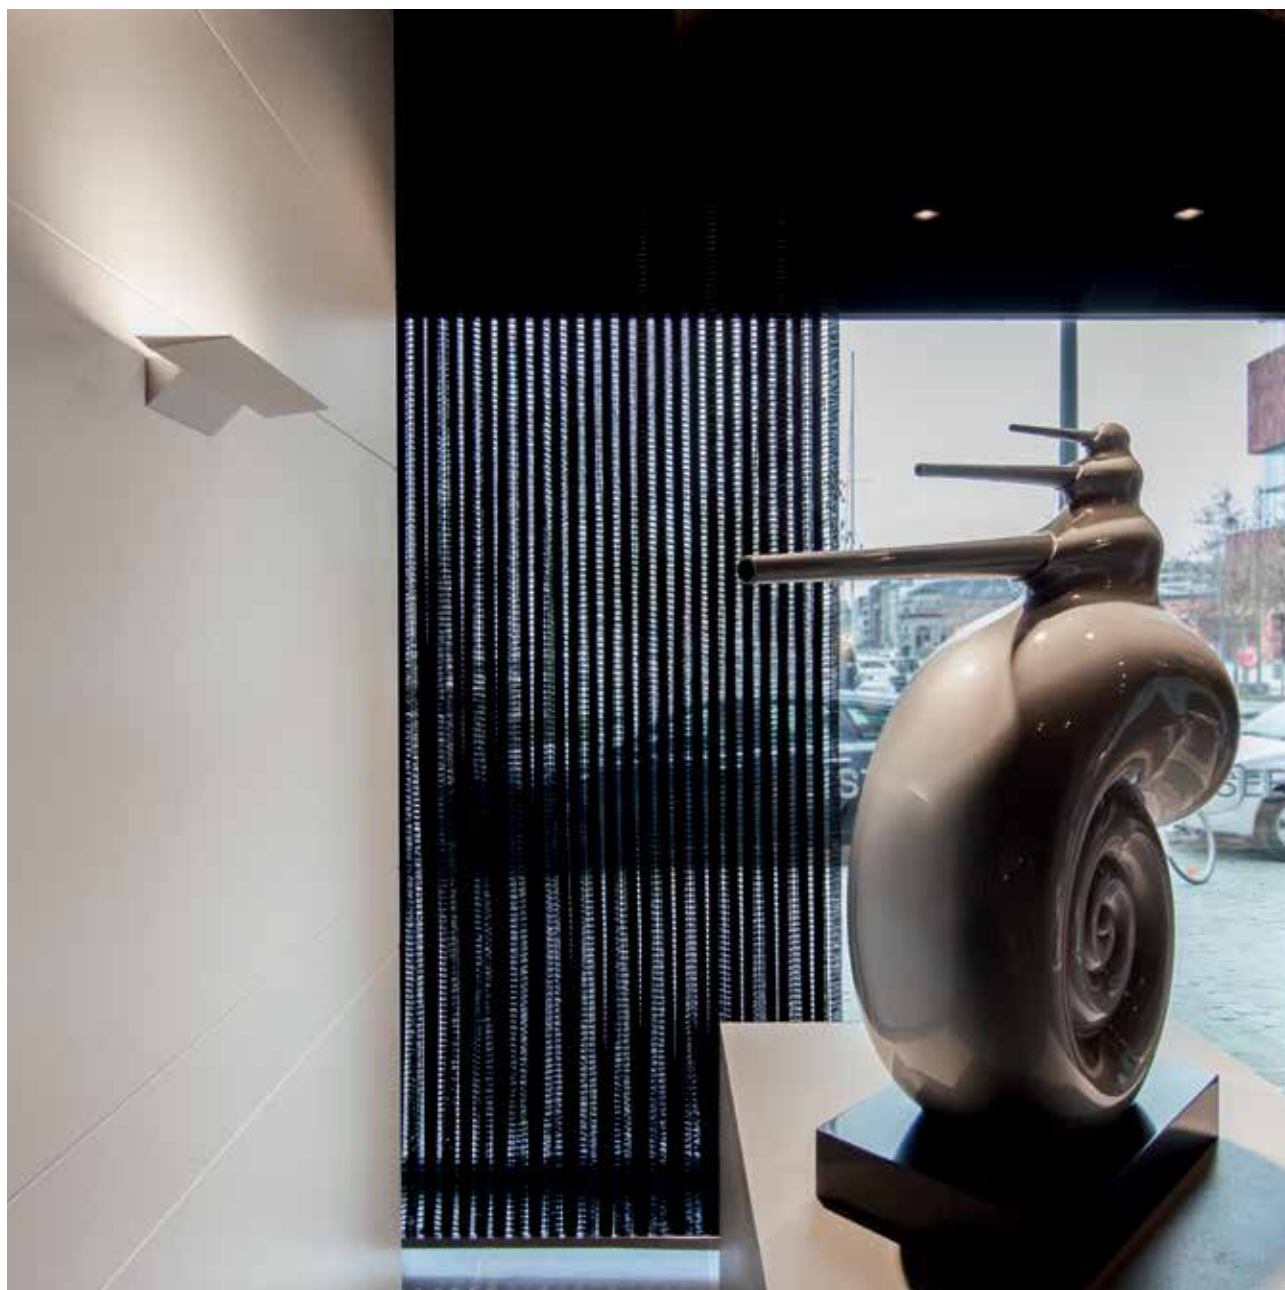

VINCE



CRI > 80

VINCE

3000
K

LED CLUSTER 8,5W / 705lm / 350mA


275 10 12 ◇

◇ = W

220-240V / 50-60Hz

□ CE 1.1 IP20

CAMUS 10



CRI > 90

CAMUS 10 LED

3000
K

LED 7,1W / 774lm / 350mA

275 08 811 930 ◇

◇ = W

100-240V / 50-60Hz

□ CE 1.0 IP20



FULL INFO
TECHNICAL CHAPTER

ACCESSORIES


TIGA V-PLATE ◇

223 753 01◇




◇ = B / W



TIGA IN LED



TIGA LED

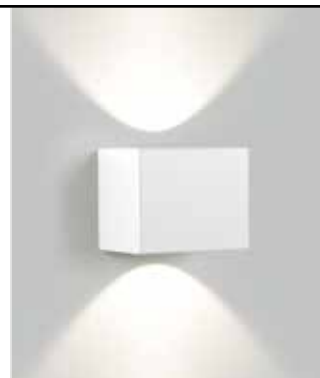

CRI > 90

TIGA IN LED



3000
K

LED 7,1W / 774lm / 350mA



FE

223 753 811 932 ED8 ◇

◇ = B-MMAT / W-W



2700
K

LED 7,1W / 743lm / 350mA



FE

223 753 811 922 ED8 ◇

◇ = B-MMAT / W-W

MAINS DIMMING (FE)
220-240V / 50-60Hz

◇ CE 1.3 IP20

ACCESSORIES
TIGA V-PLATE

TIGA LED BS

LED 7,1W / 774lm / 350mA

223 752 811 932 ED8 ◇

◇ = A / G / W

LED 7,1W / 743lm / 350mA

223 752 811 922 ED8 ◇

◇ = A / G / W

MAINS DIMMING (FE)
110-240V / 50-60Hz

◇ CE 1.4 IP65

ACCESSORIES
TIGA V-PLATE

TIGA LED

LED 7,1W / 774lm / 350mA

223 751 811 932 ED8 ◇

◇ = A / G / W

LED 7,1W / 743lm / 350mA


223 751 811 922 ED8 ◇

◇ = A / G / W

MAINS DIMMING (FE)
110-240V / 50-60Hz

◇ CE 1.4 IP65

ACCESSORIES
TIGA V-PLATE

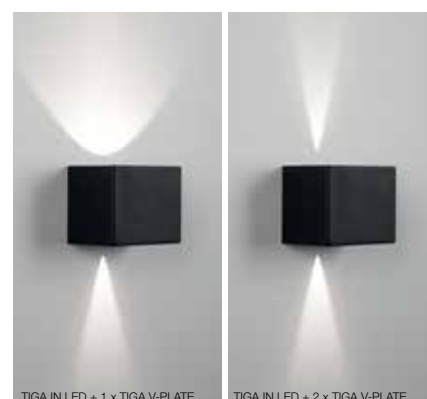


TIGA IN LED + 1 x TIGA V-PLATE

TIGA IN LED + 2 x TIGA V-PLATE



BOXY WL+



CRI > 90		BOXY WL+
3000 K		LED 7,1W / 774lm / 350mA
FE	REFL FL 33°	251 69 811 932 ED8 ◇ ◇ = W-W
2700 K		LED 7,1W / 743lm / 350mA
FE	REFL FL 33°	251 69 811 922 ED8 ◇ ◇ = W-W
MAINS DIMMING (FE) 110-240V / 50-60Hz		
CE 0,9 IP20 IP53		





INARCHITECTUUR

FULL INFO TECHNICAL CHAPTER


OPTIONS

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



YUPI



CRI > 80

3000
K

YUPI X LED

2 x LED [A] 1,1W / 120lm / 350mA
2 x LED [A] 1,6W / 168lm / 500mA

279 91 22 ◇
◇ = A / W

◇ CE 0,5 IP65



OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM



FULL INFO TECHNICAL CHAPTER		OPTIONS
CONTROL GEAR		
LED POWER SUPPLY 24V-DC / 20W 300 89 24 20	146 x 55 x 19	
LED POWER SUPPLY 24V-DC / 40W 300 89 24 40	242 x 46 x 36	
LED POWER SUPPLY 24V-DC / 60W 300 89 24 60	215 x 44 x 31	
LED POWER SUPPLY 24V-DC / 80W 300 89 24 80 ED1	250 x 50 x 34	
LED POWER SUPPLY 24V-DC / 150W 300 89 24 150	260 x 60 x 49	




NEW

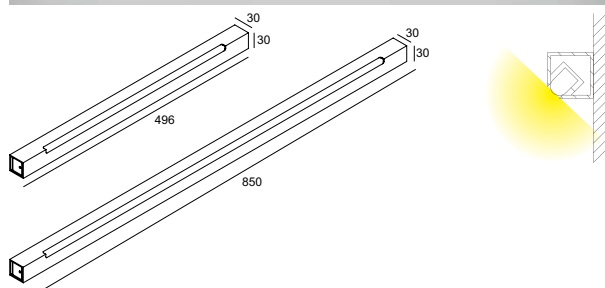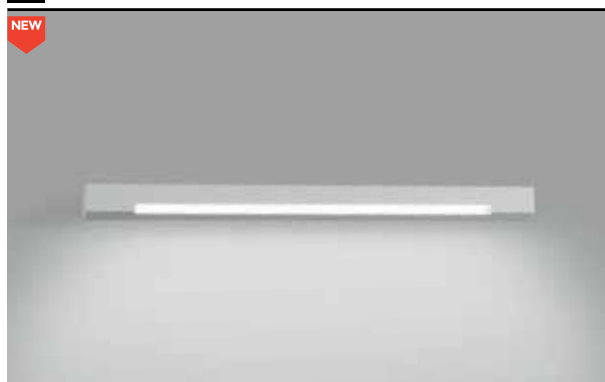

BOTEE

NEW

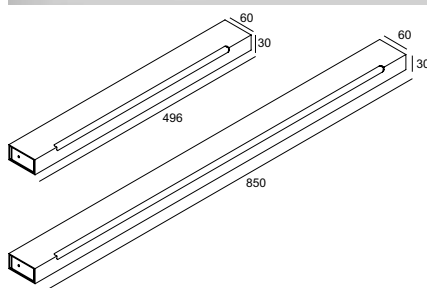

CRI > 80

3000
K**BOTEE 350****BOTEE 385**

LED TUBE 6W / 504lm / 24V-DC

LED TUBE 12W / 924lm / 24V-DC

270 71 050 ◇
◇ = C / W**270 71 085** ◇
◇ = C / W

IP54

IP54

 OPTIONS
 LED POWER SUPPLY 24V-DC

 OPTIONS
 LED POWER SUPPLY 24V-DC
BOTEE 650**BOTEE 685**

LED TUBE 6W / 504lm / 24V-DC


LED TUBE 12W / 924lm / 24V-DC

270 72 050 ◇
◇ = C / W**270 72 085** ◇
◇ = C / W
 100-240V / 50-60Hz

 IP54

 100-240V / 50-60Hz


 IP54

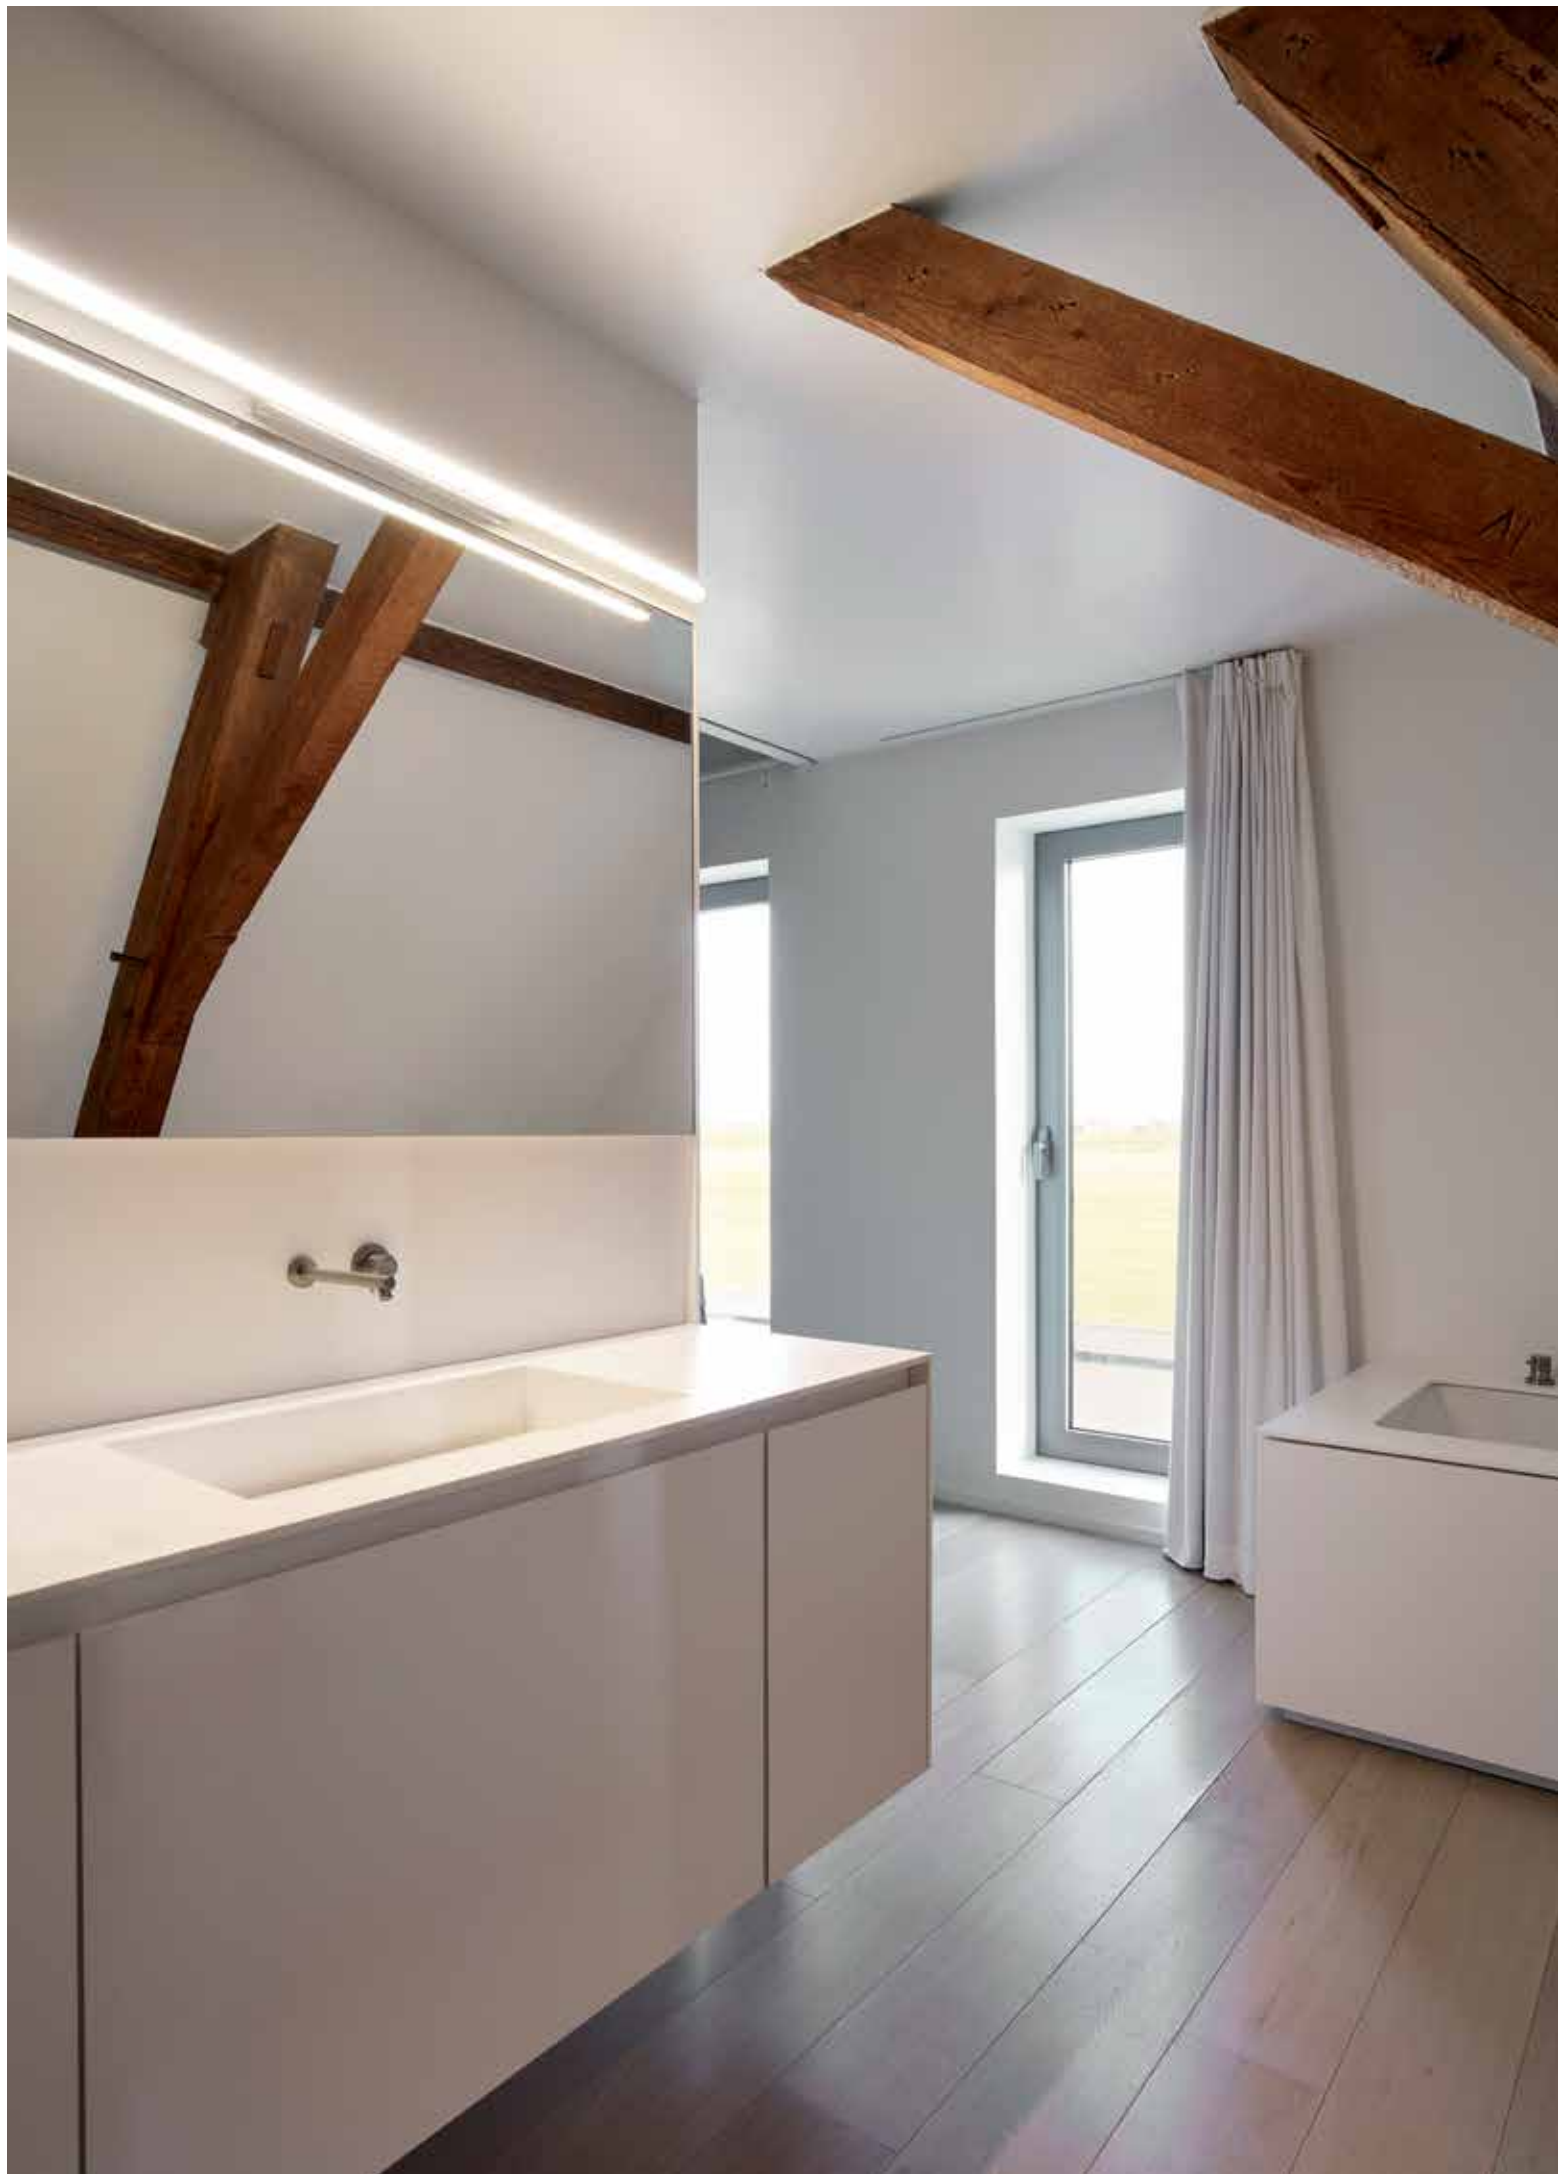



FEMTOLINE TP WALL

NEW

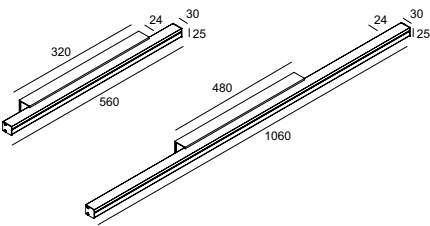

CRI > 90

FEMTOLINE TP WALL 60

FEMTOLINE TP WALL 100

3000
K

LED FLEX 11,9W / 1155lm / 24V-DC

LED FLEX 22,6W / 2205lm / 24V-DC

270 75 060 ◇
◇ = C / W

270 75 100 ◇
◇ = C / W

220-240V / 0 | 50-60Hz

110-240V / 50-60Hz



□ CE 0,9 IP44

□ CE 1,3 IP44






LIQUA SL

BACKSPACE LED




CRI > 80	BACKSPACE 38 LED	BACKSPACE 66 LED
	LED CLUSTER 7,5W / 980lm / 350mA	LED CLUSTER 15W / 1960lm / 350mA
	274 81 12 ◇ ◇ = B / W	274 81 22 ◇ ◇ = B / W
		
		
	MAINS DIMMING (FE) 100-240 / 50-60Hz   IP20	MAINS DIMMING (FE) 100-240 / 50-60Hz   IP20



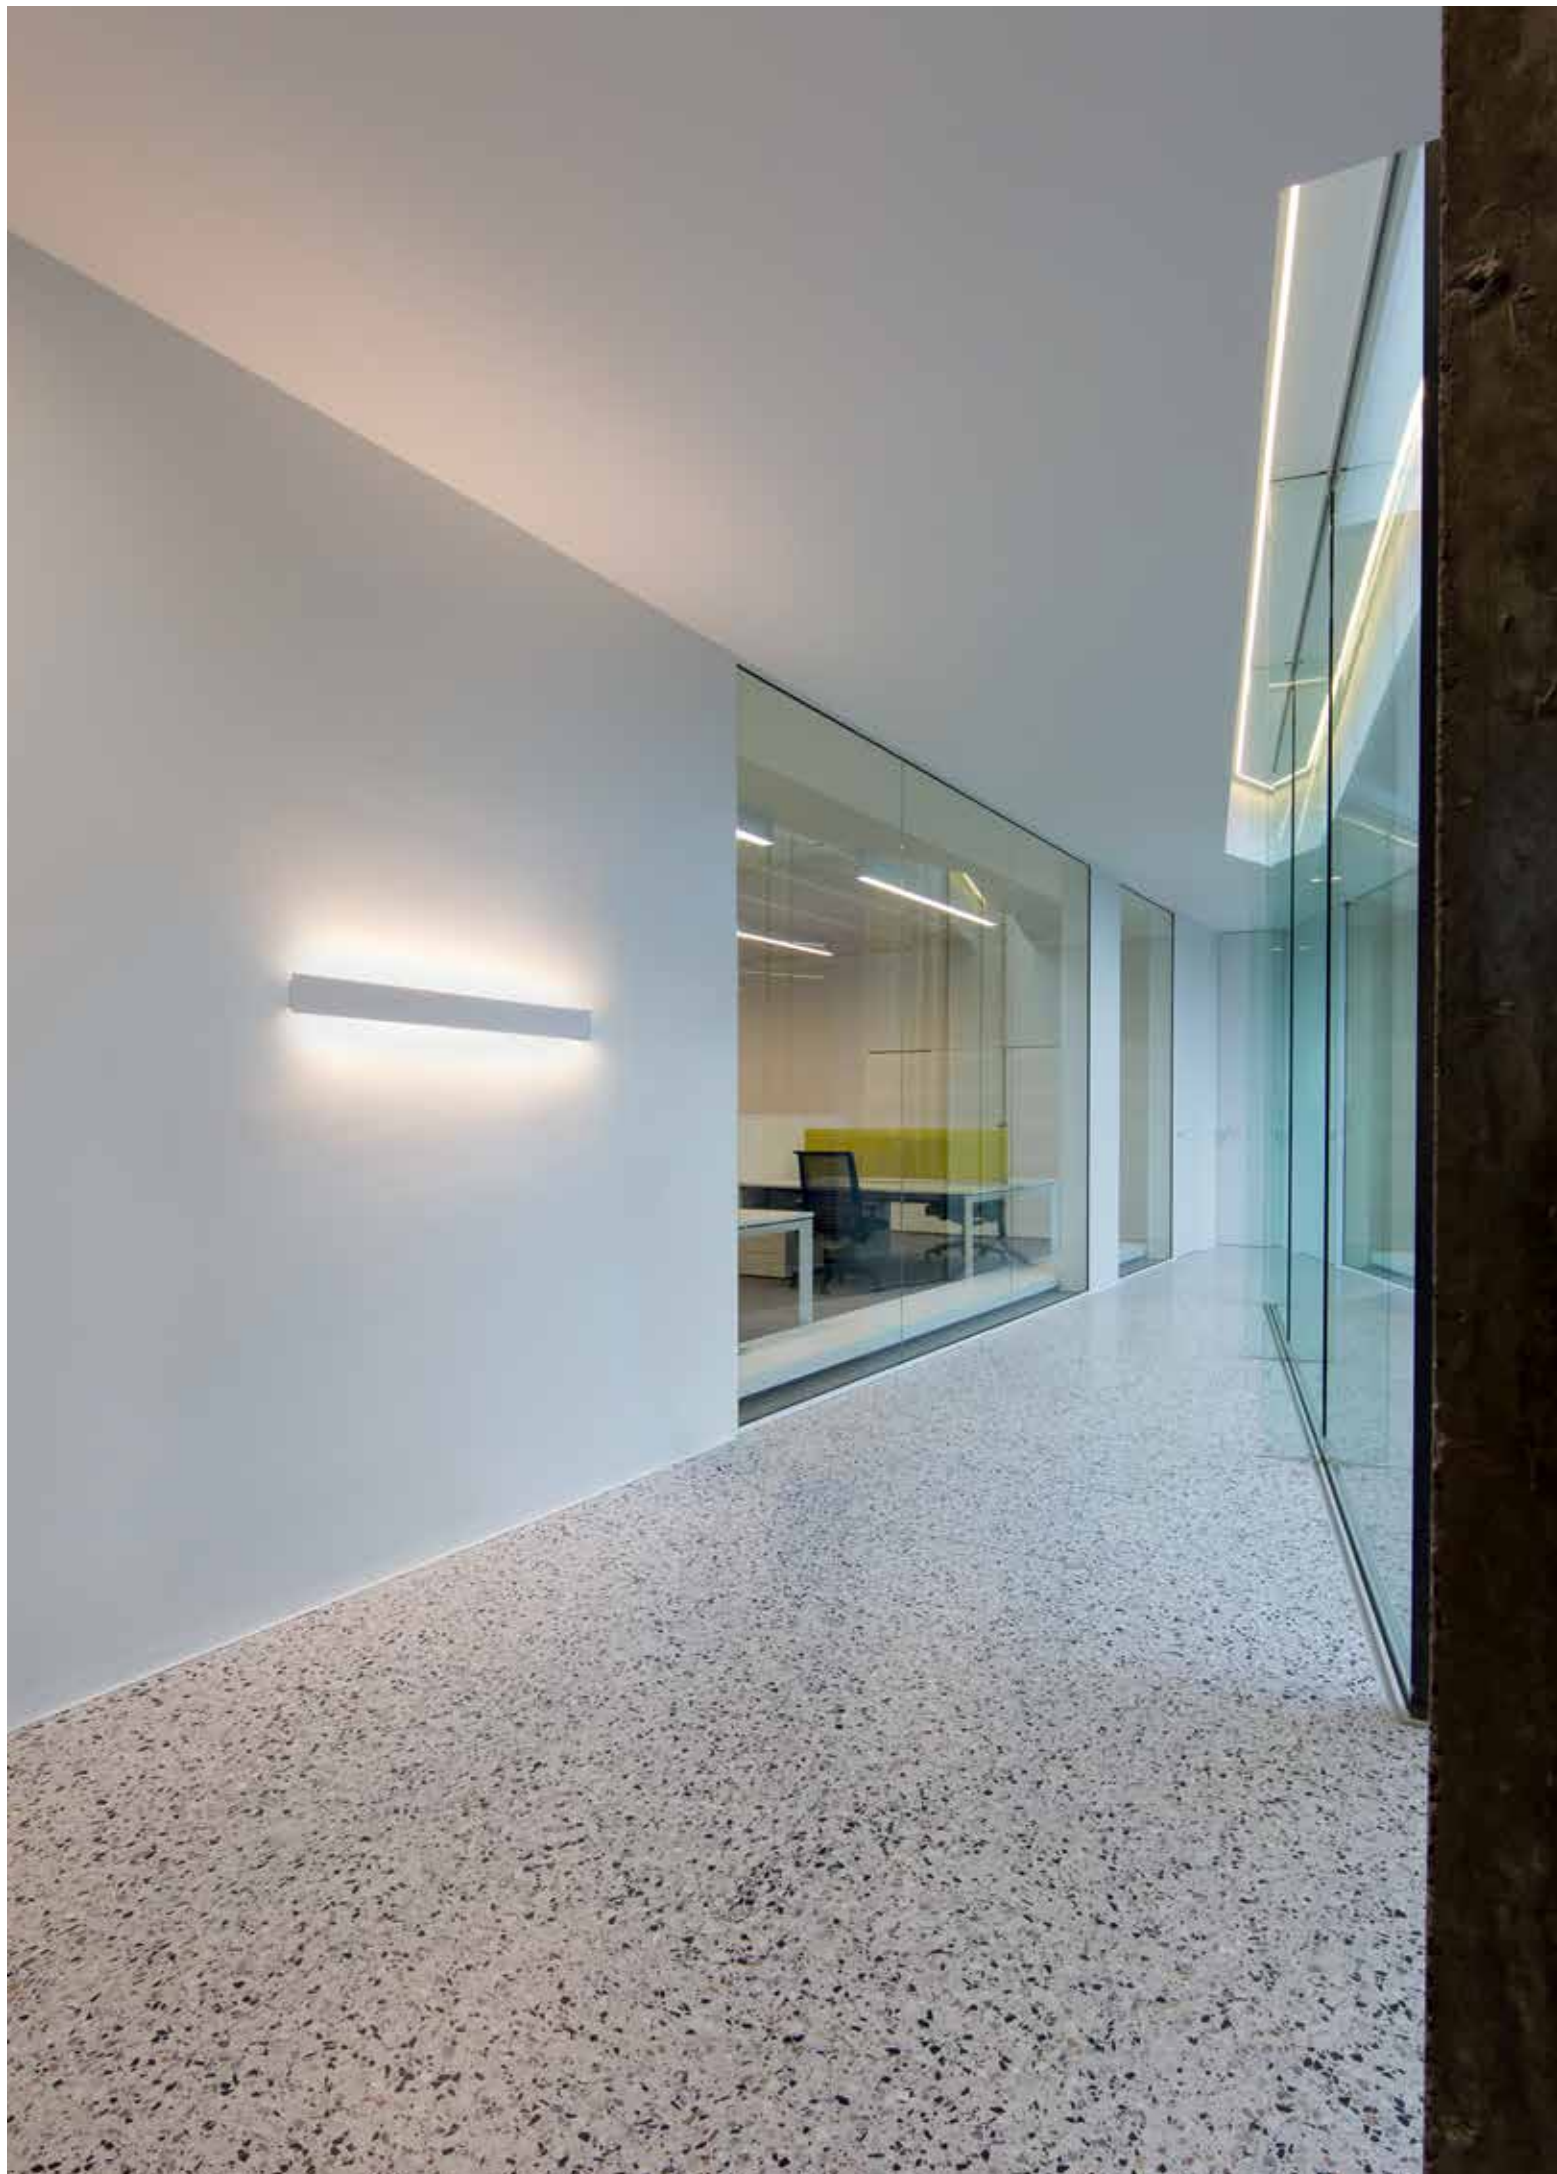



T-LINER

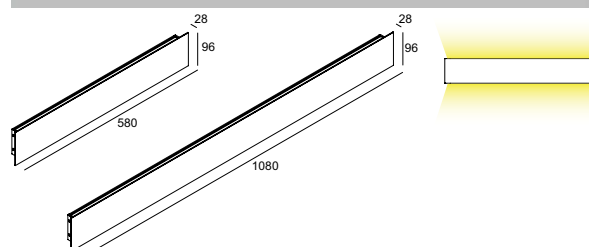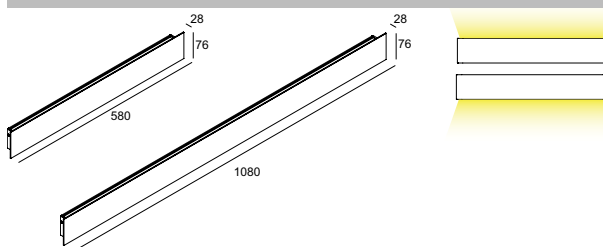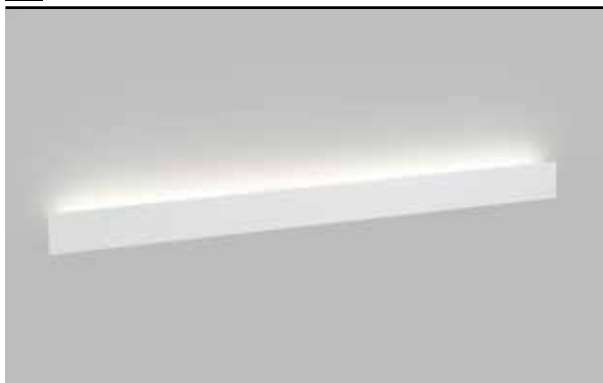



CRI > 80	T-LINER 50 83	T-LINER 100 83
3000 K	LED CLUSTER 7,35W / 980lm / 350mA	LED CLUSTER 14,7W / 1960lm / 350mA
	270 60 11 83 ◇ ◇ = W	270 60 12 83 ◇ ◇ = W
	220-240V / 50-60Hz ◇ CE 0,8 IP20	220-240V / 50-60Hz ◇ CE 1,5 IP20

T-LINER 50 83 DOWN-UP	T-LINER 100 83 DOWN-UP
2 x LED CLUSTER 7,35W / 980lm / 350mA	2 x LED CLUSTER 14,7W / 1960lm / 350mA
270 61 21 83 ◇ ◇ = W	270 61 22 83 ◇ ◇ = W
220-240V / 50-60Hz ◇ CE 1,0 IP20	220-240V / 50-60Hz ◇ CE 1,9 IP20





JETI



CRI > 80

JETI PLANO L 110

JETI L 115

JETI PLANO L 415 DIM1

3000
K

LED CLUSTER 10,5W / 1180lm / 500mA

LED CLUSTER 15W / 1960lm / 350mA

LED CLUSTER 60W / 7840lm / 700mA

NON
DIM

271 521 83

271 511 83

271 522 83 ED1

1-10V
DALI
R

220-240V / 50-60Hz

110-240V / 50-60Hz

220-240V / 0 | 50-60Hz

CE 1,0 IP54

CE 0,8 IP20

CE 5,4 IP20