

EXTERIOR CEILING RECESSED

The ceiling recessed range offers fixed or adjustable solutions in different shapes and sizes. According to the different IP ratings, these luminaires can either be used in bathrooms, outside or in other wet areas.

www.deltalight.com/ECR




To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/20225811932 or www.deltalight.com/reo-x



INDEX

EXTERIOR CEILING RECESSED



MICRO REO X
EXT 752



CARREE X
EXT 759



MINI REO X
EXT 753



REO X
EXT 753



MINI DIRO R IP
INT 754



DIRO GT
EXT 755



DIRO OK X
EXT 755

CARREE X	EXT 759
DIRO GT	EXT 755
DIRO OK X	EXT 755
MICRO REO X	EXT 752
MINI DIRO R IP	EXT 754
MINI REO X	EXT 753
REO X	EXT 753



FULL INFO TECHNICAL CHAPTER

OPTIONS

CONTROL GEAR

LED POWER SUPPLY

ALL INFO ON FOLD-OUT COVER

DELTA
DELTA
R

MICRO REO X

NEW

85

Ø54

46 x 90 / min.5

CRI > 90	MICRO REO X
3000 K	LED [H] 7,1W / 774lm / 350mA
REFL FL 35°	302 23 811 932 ◇ ◇ = B / W
2700 K	LED [H] 7,1W / 743lm / 350mA
REFL FL 35°	302 23 811 922 ◇ ◇ = B / W

NON ADJUSTABLE

CE


0.2

IP20

IP43

OPTIONS

LED POWER SUPPLY 350mA-DC / DIM

MINI REO X

 67 x 60 /  min.5

CRI > 90

MINI REO X
3000 K
 LED [D] 6,4W / 587lm / 350mA

 **415 151 933** ◇
 ◇ = B / W

2700 K
 LED [D] 6,4W / 587lm / 350mA



 **415 151 923** ◇
 ◇ = B / W

NON ADJUSTABLE

  IP65

OPTIONS

LED POWER SUPPLY 350mA-DC / DIM

REO X

 76 x 55 /  max.22

 76 x 55

CRI > 90

REO X 65 S1
 LED [H] 7,1W / 774lm / 350mA
 LED [H] 10,4W / 1075lm / 500mA

 **202 256 811 932** ◇
 ◇ = A / B / W

2700 K 
 LED [H] 7,1W / 743lm / 350mA
 LED [H] 10,4W / 1032lm / 500mA

 **202 256 811 922** ◇
 ◇ = A / B / W

NON ADJUSTABLE

  IP65

OPTIONS

LED POWER SUPPLY 350-500mA-DC / DIM

REO X 65 S2
 LED [H] 7,1W / 774lm / 350mA
 LED [H] 10,4W / 1075lm / 500mA

 **202 2562 811 932** ◇
 ◇ = A / B / W

 LED [H] 7,1W / 743lm / 350mA
 LED [H] 10,4W / 1032lm / 500mA

 **202 2562 811 922** ◇
 ◇ = A / B / W

NON ADJUSTABLE

  IP65

OPTIONS

LED POWER SUPPLY 350-500mA-DC / DIM

CRI > 90

REO X S1
 LED [H] 7,1W / 774lm / 350mA
 LED [H] 10,4W / 1075lm / 500mA

 **202 25 811 932** ◇
 ◇ = A / B / W

2700 K 
 LED [H] 7,1W / 743lm / 350mA
 LED [H] 10,4W / 1032lm / 500mA

 **202 25 811 922** ◇
 ◇ = A / B / W

NON ADJUSTABLE

  IP20
 IP44

OPTIONS

LED POWER SUPPLY 350-500mA-DC / DIM

REO X S2
 LED [H] 7,1W / 774lm / 350mA
 LED [H] 10,4W / 1075lm / 500mA

 **202 252 811 932** ◇
 ◇ = A / B / W

 LED [H] 7,1W / 743lm / 350mA
 LED [H] 10,4W / 1032lm / 500mA

 **202 252 811 922** ◇
 ◇ = A / B / W

NON ADJUSTABLE

  IP20
 IP44

OPTIONS

LED POWER SUPPLY 350-500mA-DC / DIM

FULL INFO TECHNICAL CHAPTER

OPTIONS

CONTROL GEAR

LED POWER SUPPLY

ALL INFO ON FOLD-OUT COVER

TRANSFO 100W IP67

200 47 10


80 x 32 x 27

NEW

CTRL DELTA R

MINI DIRO R IP





67 x 70 / min.5

CRI > 80

3000 K

LENS SP 10°

MINI DIRO R IP

LED [C] 4,1W / 425lm / 350mA
LED [C] 6W / 558lm / 500mA

415 143 831 ◇
◇ = B / W

2700 K

LENS SP 10°

LED [C] 4,1W / 425lm / 350mA
LED [C] 6W / 558lm / 500mA

415 143 821 ◇
◇ = B / W

NON ADJUSTABLE

CE

0,4


IP44

OPTIONS

LED POWER SUPPLY 350-500mA-DC / DIM



DIRO GT



76 x 90 / min.5

CRI > 90

DIRO GT LED

3000 K

LED [H] 7,1W / 774lm / 350mA
LED [H] 10,4W / 1075lm / 500mA



202 342 811 932 ◇
◇ = A / W

2700 K

LED [H] 7,1W / 743lm / 350mA
LED [H] 10,4W / 1032lm / 500mA



202 342 811 922 ◇
◇ = A / W

NON ADJUSTABLE


IP20
IP44

OPTIONS

LED POWER SUPPLY 350-500mA-DC / DIM



DIRO OK X



76 x 100 / max.22

DIRO GT

QR-C51 max.50W

202 34 12 ◇
◇ = W

NON ADJUSTABLE
GX5.3 / 12V

IP20
IP44

OPTIONS
TRANSFO

DIRO OK X S1

QR-C51 max.50W


202 14 13 ◇
◇ = A

ADJUSTABLE 0°- 20°
GX5.3 / 12V

IP20
IP23

OPTIONS
TRANSFO



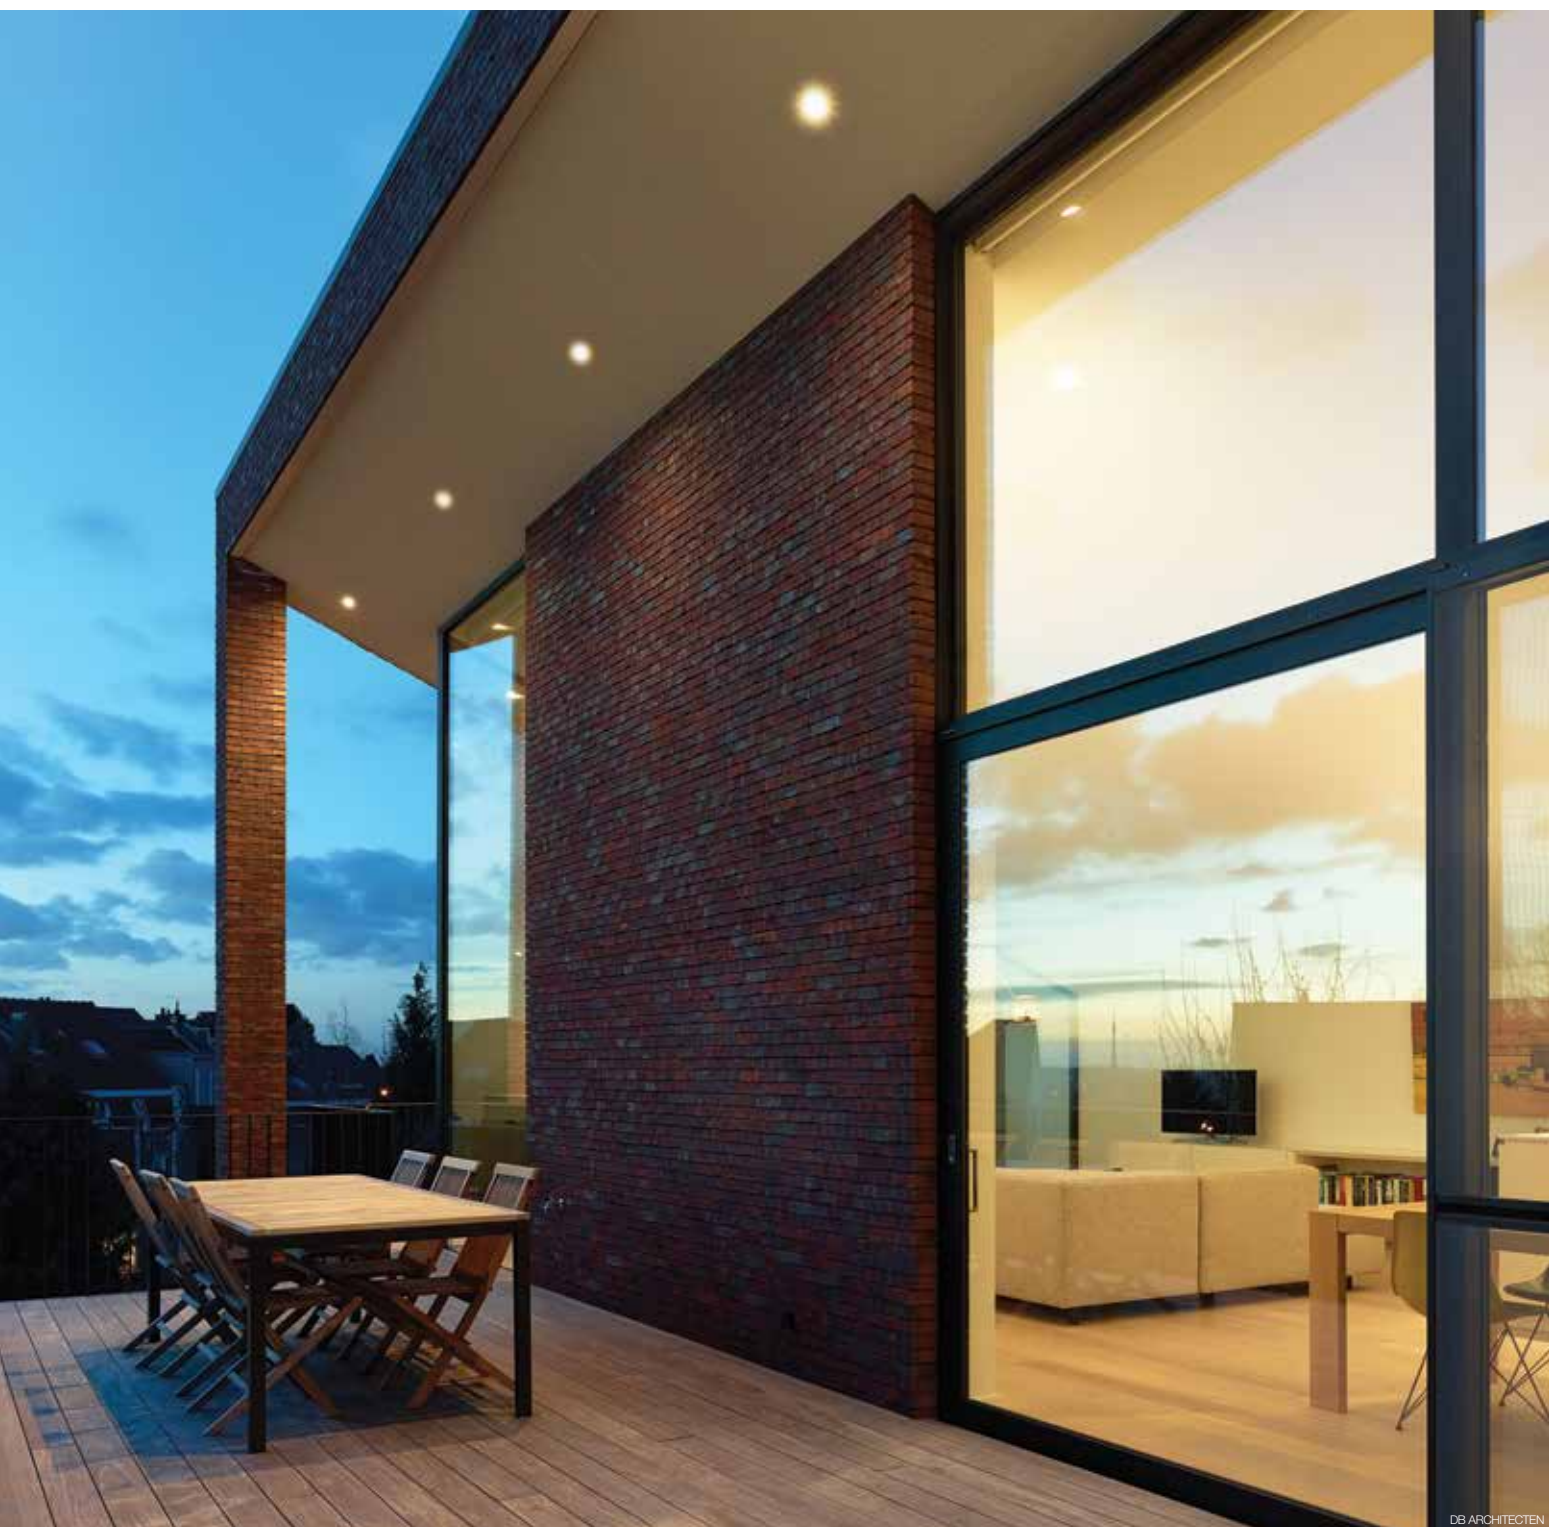

DB ARCHITECTEN



FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

CONCRETE PACK S75

207 02 9071

CONCRETE PACK C S75

207 02 9071 C

CONCRETE PACK T S75

207 02 9071 T

EXPOSED CONCRETE

PACK S75

207 02 9093

EXPOSED CONCRETE

PACK C S75

207 02 9093 C

EXPOSED CONCRETE

PACK T S75

207 02 9093 T

CONTROL GEAR

LED POWER SUPPLY

ALL INFO ON FOLD-OUT COVER

TRANSFO 100W IP67

200 47 10

CRI > 90

3000
K

REFL
FL
33°

2700
K

NEW

REFL
FL
33°

CRI > 90

3000
K

REFL
FL
33°



2700
K

NEW

REFL
FL
33°



CARREE X LED



75 x 75 x 80 / max.35

CARREE X LED 65 S1

LED [H] 7,1W / 774lm / 350mA

202 206 811 932 ◇
◇ = A / N / W

LED [H] 7,1W / 743lm / 350mA

202 206 811 922 ◇
◇ = A / N / W

NON ADJUSTABLE

CE 0,3 IP65

OPTIONS

LED POWER SUPPLY 350mA-DC / DIM

CONCRETE PACK S75 / C S75 / T S75 (ONLY FOR S2)

EXPOSED CONCRETE PACK S75 / C S75 / T S75 (ONLY FOR S2)

CARREE X LED S1

LED [H] 7,1W / 774lm / 350mA

202 20 811 932 ◇
◇ = A / N / W

LED [H] 7,1W / 743lm / 350mA

202 20 811 922 ◇
◇ = A / N / W

NON ADJUSTABLE



CE 0,3 IP20
IP44

OPTIONS

LED POWER SUPPLY 350mA-DC / DIM



CARREE II X



75 x 75 x 90 / max.35

CARREE II X S1

QR-C51 max.50W

202 20 41 ◇
◇ = A

NON ADJUSTABLE

GX5.3 / 12V

CE 0,2 IP20
IP23 0,5

OPTIONS

TRANSFO

CONCRETE PACK S75 / C S75 / T S75 (ONLY FOR S2)

EXPOSED CONCRETE PACK S75 / C S75 / T S75 (ONLY FOR S2)







