


EXTERIOR CEILING SURFACE

The following range offers you easy-to-install ceiling luminaire solutions, be it for outdoor use or bathroom and wellness areas. Different light characteristics and colour finishes are available to match your project.

www.deltalight.com/ECS



To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url. E.g. www.deltalight.com/2320107 or www.deltalight.com/dox100s

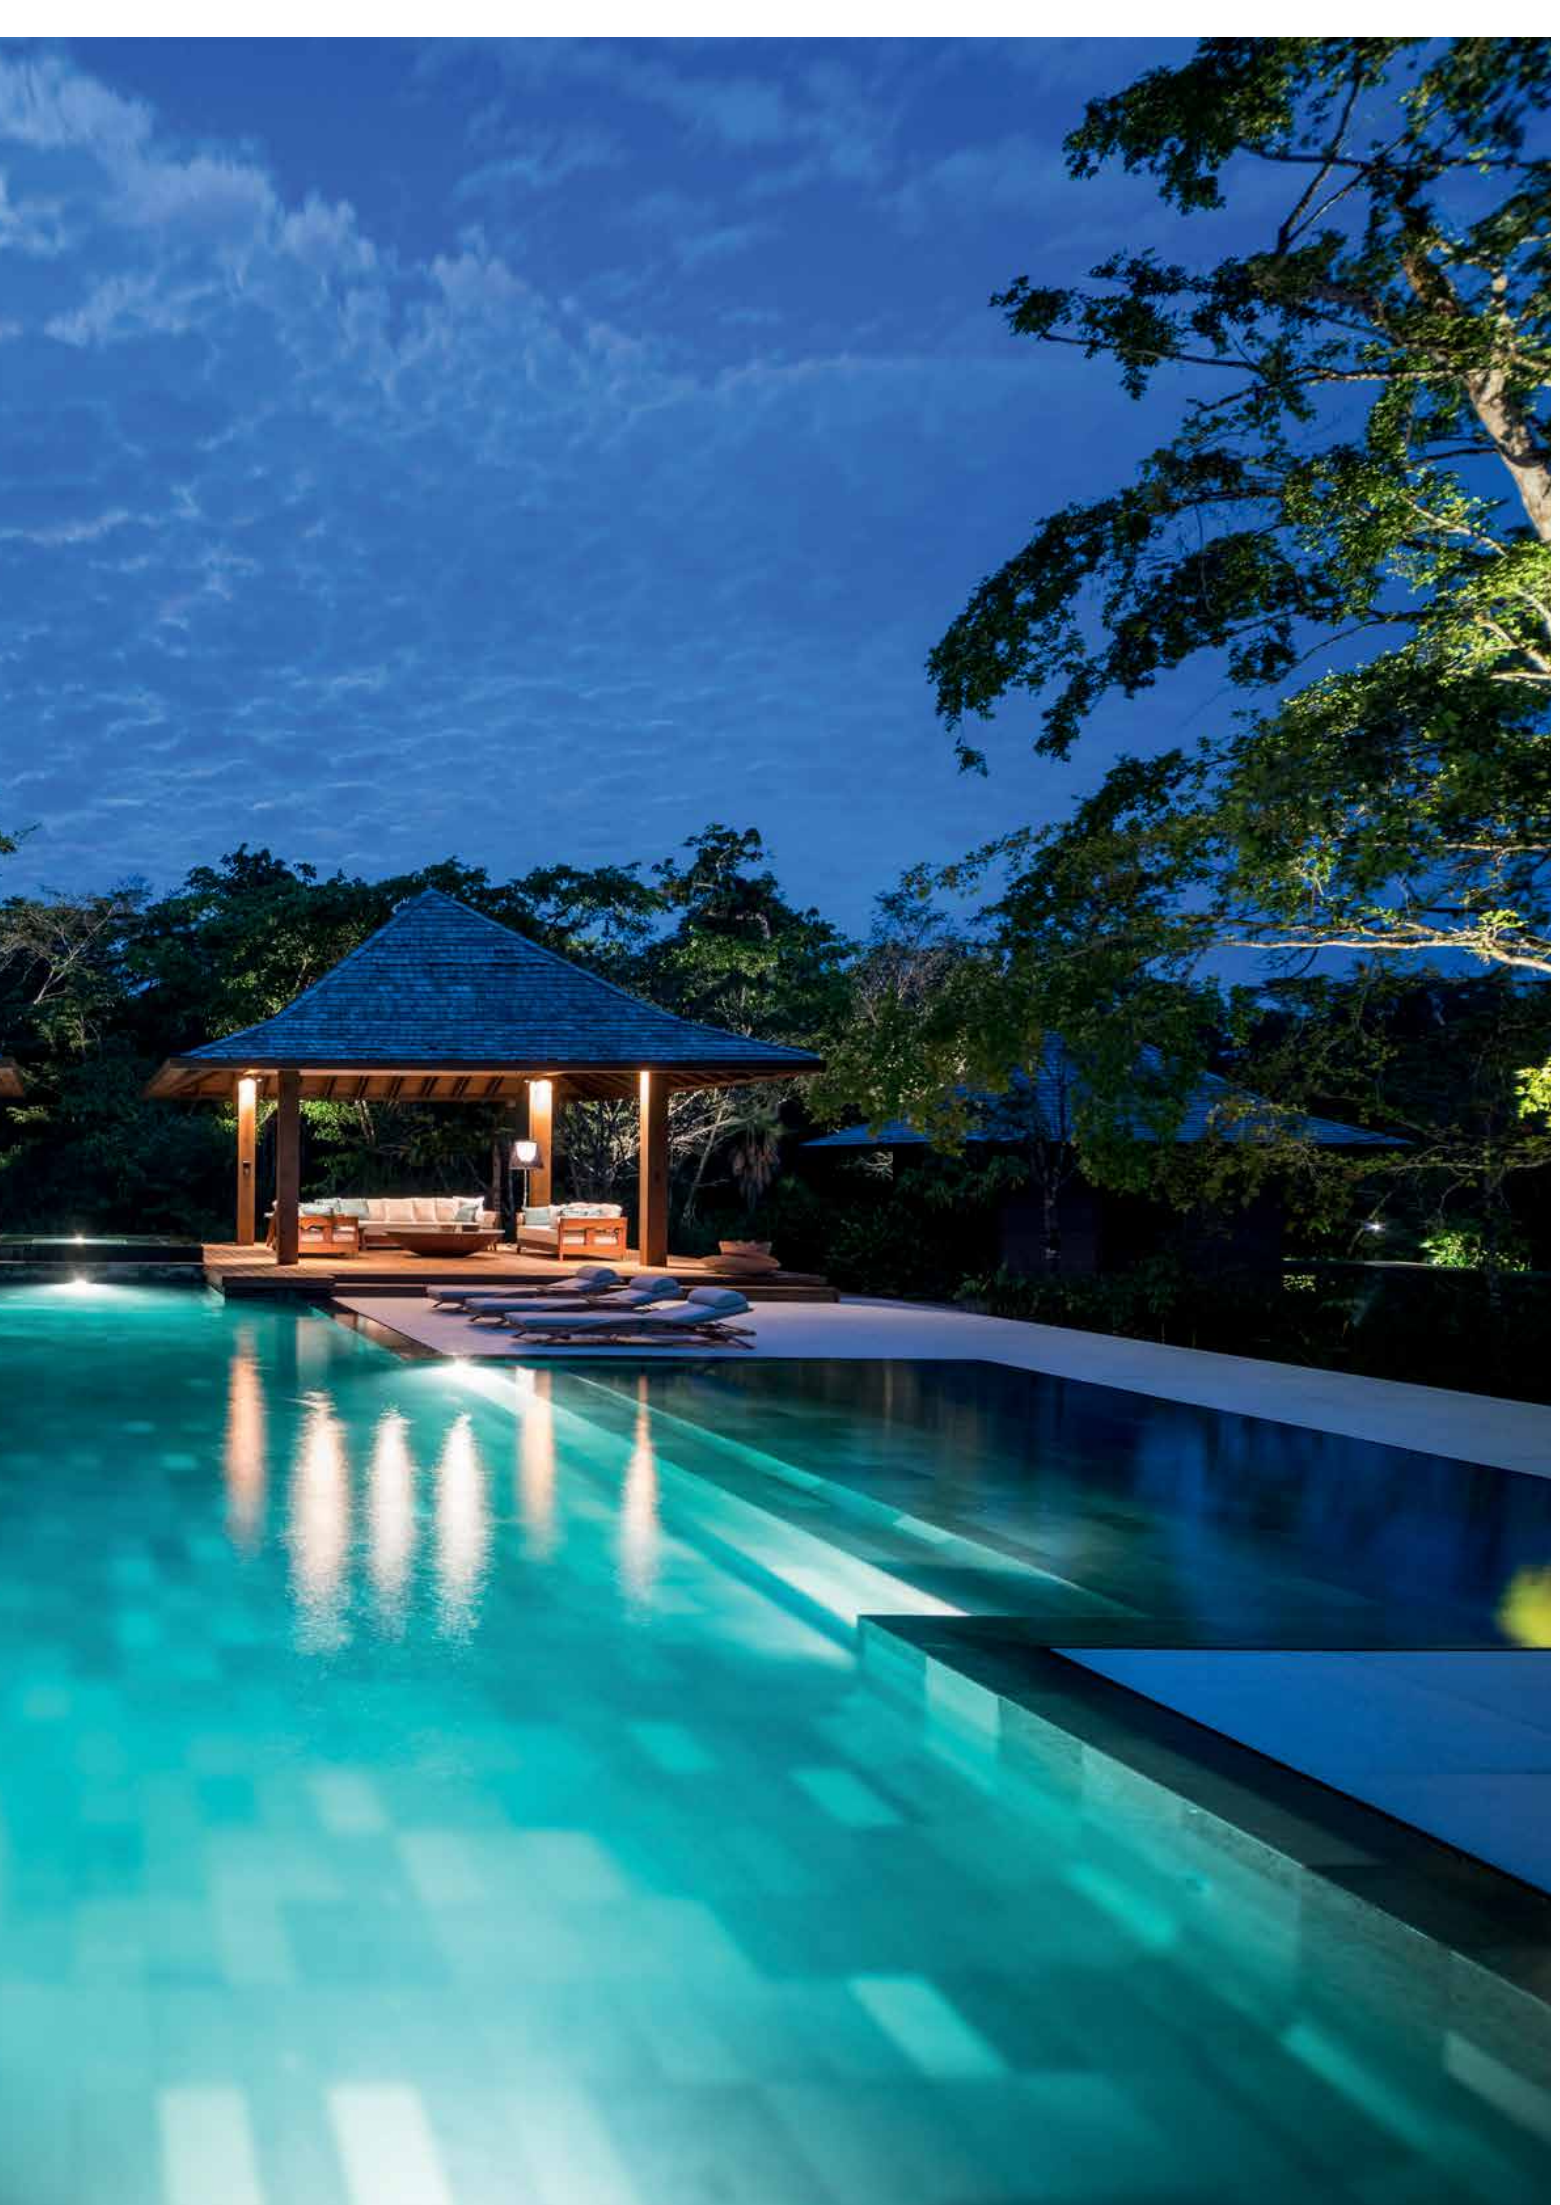

INDEX

EXTERIOR CEILING SURFACE



BOXY R
EXT 769



MONTUR SQL
INT 779



KIX S
EXT 787



DOX 100 S
EXT 771



MONTUR R
INT 779



INDUSTRIAL S
EXT 787



SUPERNOVA XS X
EXT 773



SONTUR R
INT 779



B-LINER 65 IP
EXT 775



BOXY L+ LED
EXT 781



MONTUR S
EXT 777



BOXY +
EXT 781



MONTUR M
EXT 777




STIG
EXT 785

B-LINER 65 IP	EXT 775
BOXY +	EXT 781
BOXY L+ LED	EXT 781
BOXY R	EXT 769
DOX 100 S	EXT 771
INDUSTRIAL S	EXT 787
KX S	EXT 787
MONTUR M	EXT 777
MONTUR R	EXT 779
MONTUR S	EXT 777
MONTUR SQL	EXT 779
SONTUR R	EXT 779
STIG	EXT 785
SUPERNOVA XS X	EXT 773





BOXY R



CRI > 90

BOXY R DIM8

3000
K

LED 10,4W / 1075lm / 500mA

FE



251 70 811 932 ED8 ◇
◇ = B-B / W-B / W-W

2700
K

LED 10,4W / 1032lm / 500mA

FE



251 70 811 922 ED8 ◇
◇ = B-B / W-B / W-W

MAINS DIMMING (FE)
110-240V / 50-60Hz

CE 0.6 IP53





BOXY R LED B-B / W-W





DOX 100 S



CRI > 80

DOX 100 S LED

DOX 100 S

3000
K

LED 8W / 963lm / 450mA

TC-FSE max.9W



232 01 09 ♦
♦ = N


232 01 07 ♦
♦ = A

100-240V / 50-60Hz

GX53 / 100-240V / 50-60Hz



◊ CE 0.7 IP65

◊ CE 0.6 IP55

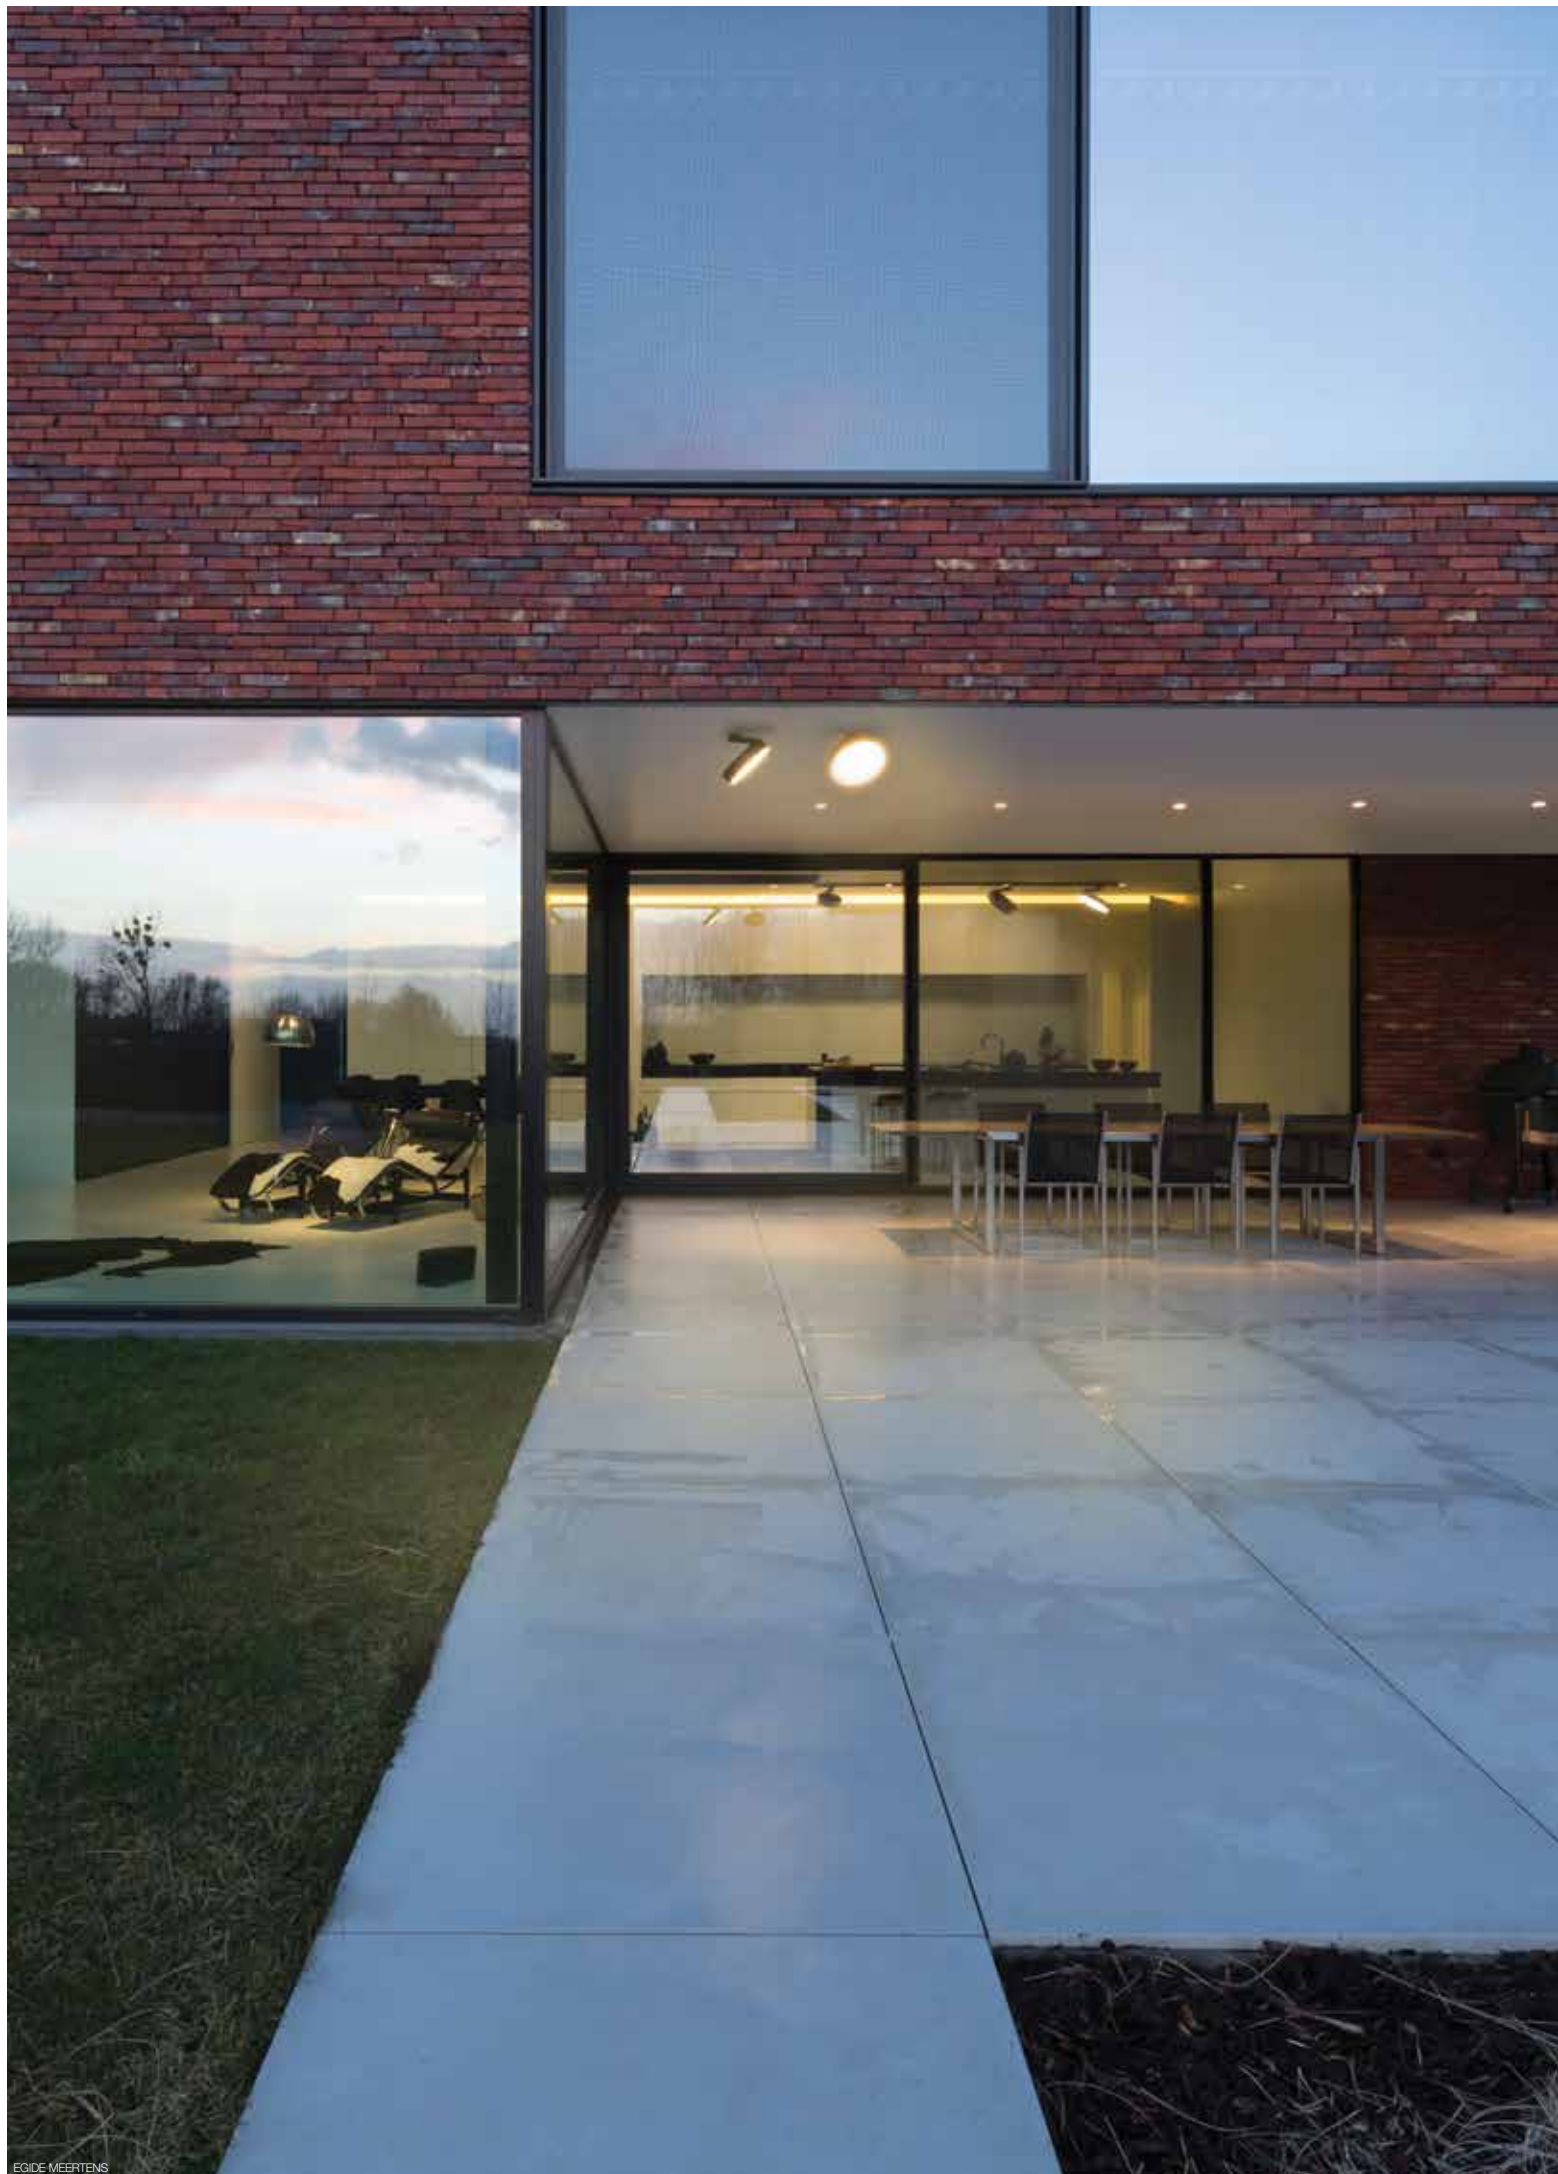



SUPERNOVA XS X



CRI > 80

3000
K

FULL / GLASS OPAL



SUPERNOVA XS 260 X

LED CLUSTER 10W / 900lm

274 87 2610 83 ◇
◇ = N / W

NON ADJUSTABLE
220-240V / 50-60Hz

◇ CE 2.4 IP64

SUPERNOVA XS PIVOT 260 X

LED CLUSTER 10W / 900lm

274 88 2610 83 ◇
◇ = N / W




ADJUSTABLE 0°-45° / 360°
220-240V / 50-60Hz

◇ CE 2.9 IP64





B-LINER 65 IP




CRI > 80

	B-LINER 6522 IP	B-LINER 6532 IP	B-LINER 6542 IP
3000 K	LED ARRAY 15W / 1960lm	LED ARRAY 22W / 2940lm	LED ARRAY 30W / 3920lm
	388 01 22 ◇ ◇ = A / N / W	388 01 32 ◇ ◇ = A / N / W	388 01 42 ◇ ◇ = A / N / W
	110-240V / 50-60Hz □ CE 1,7 IP65	110-240V / 50-60Hz □ CE 2,1 IP65	110-240V / 50-60Hz □ CE 2,6 IP65






MONTUR S



IK07



MONTUR M



IK07

CRI > 80

MONTUR S LED

3000 K

LED CLUSTER 6,3W / 808lm / 350mA

232 112 83 ◇
◇ = B

2700 K

NEW

LED CLUSTER 6,3W / 808lm / 350mA

232 112 82 ◇
◇ = B

INCL. GLASS OPAL
100-240V / 50-60Hz

◇ CE 2.0 IP65

MONTUR M LED

LED CLUSTER 6,3W / 840lm / 350mA

232 212 83 ◇
◇ = B

LED CLUSTER 6,3W / 840lm / 350mA

232 212 82 ◇
◇ = B

INCL. GLASS OPAL
100-240V / 50-60Hz

◇ CE 2.6 IP65





CRI > 80

MONTUR SQL LED

MONTUR R LED

SONTUR R LED

3000
K

LED CLUSTER 7,4W / 1000lm / 350mA

LED CLUSTER 6,3W / 840lm / 350mA

LED CLUSTER 6,3W / 840lm / 350mA

232 812 83 ◇
◇ = B

232 712 83 ◇
◇ = B

232 711 83 ◇
◇ = B

2700
K

LED CLUSTER 7,4W / 1000lm / 350mA

LED CLUSTER 6,3W / 840lm / 350mA

LED CLUSTER 6,3W / 840lm / 350mA

232 812 82 ◇
◇ = B

232 712 82 ◇
◇ = B

232 711 82 ◇
◇ = B

INCL. GLASS OPAL
100-240V / 50-60Hz
◇ CE 2.1 IP65

INCL. GLASS OPAL
100-240V / 50-60Hz
◇ CE 2.1 IP65

INCL. GLASS OPAL
100-240V / 50-60Hz
◇ CE 1.8 IP65



ARCHITECT ALFREDO SARAVIA / PROPORCION Y ESCALA / CARMEN MALDONADO / AREA STUDIO

FULL INFO TECHNICAL CHAPTER

OPTIONS

CONTROL GEAR





TRANSFO 100W IP67
200 47 10


80 x 32 x 27



BOXY L+ LED




BOXY +



CRI > 90	BOXY L+ LED	BOXY 2L+ LED	BOXY +
	LED 7,1W / 774lm / 350mA	2 x LED 7,1W / 774lm / 350mA	QPAR51 (max.50W)
	251 67 811 932 ED8 ◇ ◇ = A-A / B-B / G-G / W-W	251 67 812 932 ED8 ◇ ◇ = A-A / B-B / W-W	251 67 44 ◇ ◇ = A / G / W (max.35W)
	MAINS DIMMING (FE) 110-240V / 50-60Hz IP53	MAINS DIMMING (FE) 110-240V / 50-60Hz IP53	GU10 / 100-240V / 50-60Hz IP44 BOXY + 12V 1 x QR-C51 max.35W 251 67 43 ◇ ◇ = A / W GU5.3 / 12V IP44 OPTIONS TRANSFO



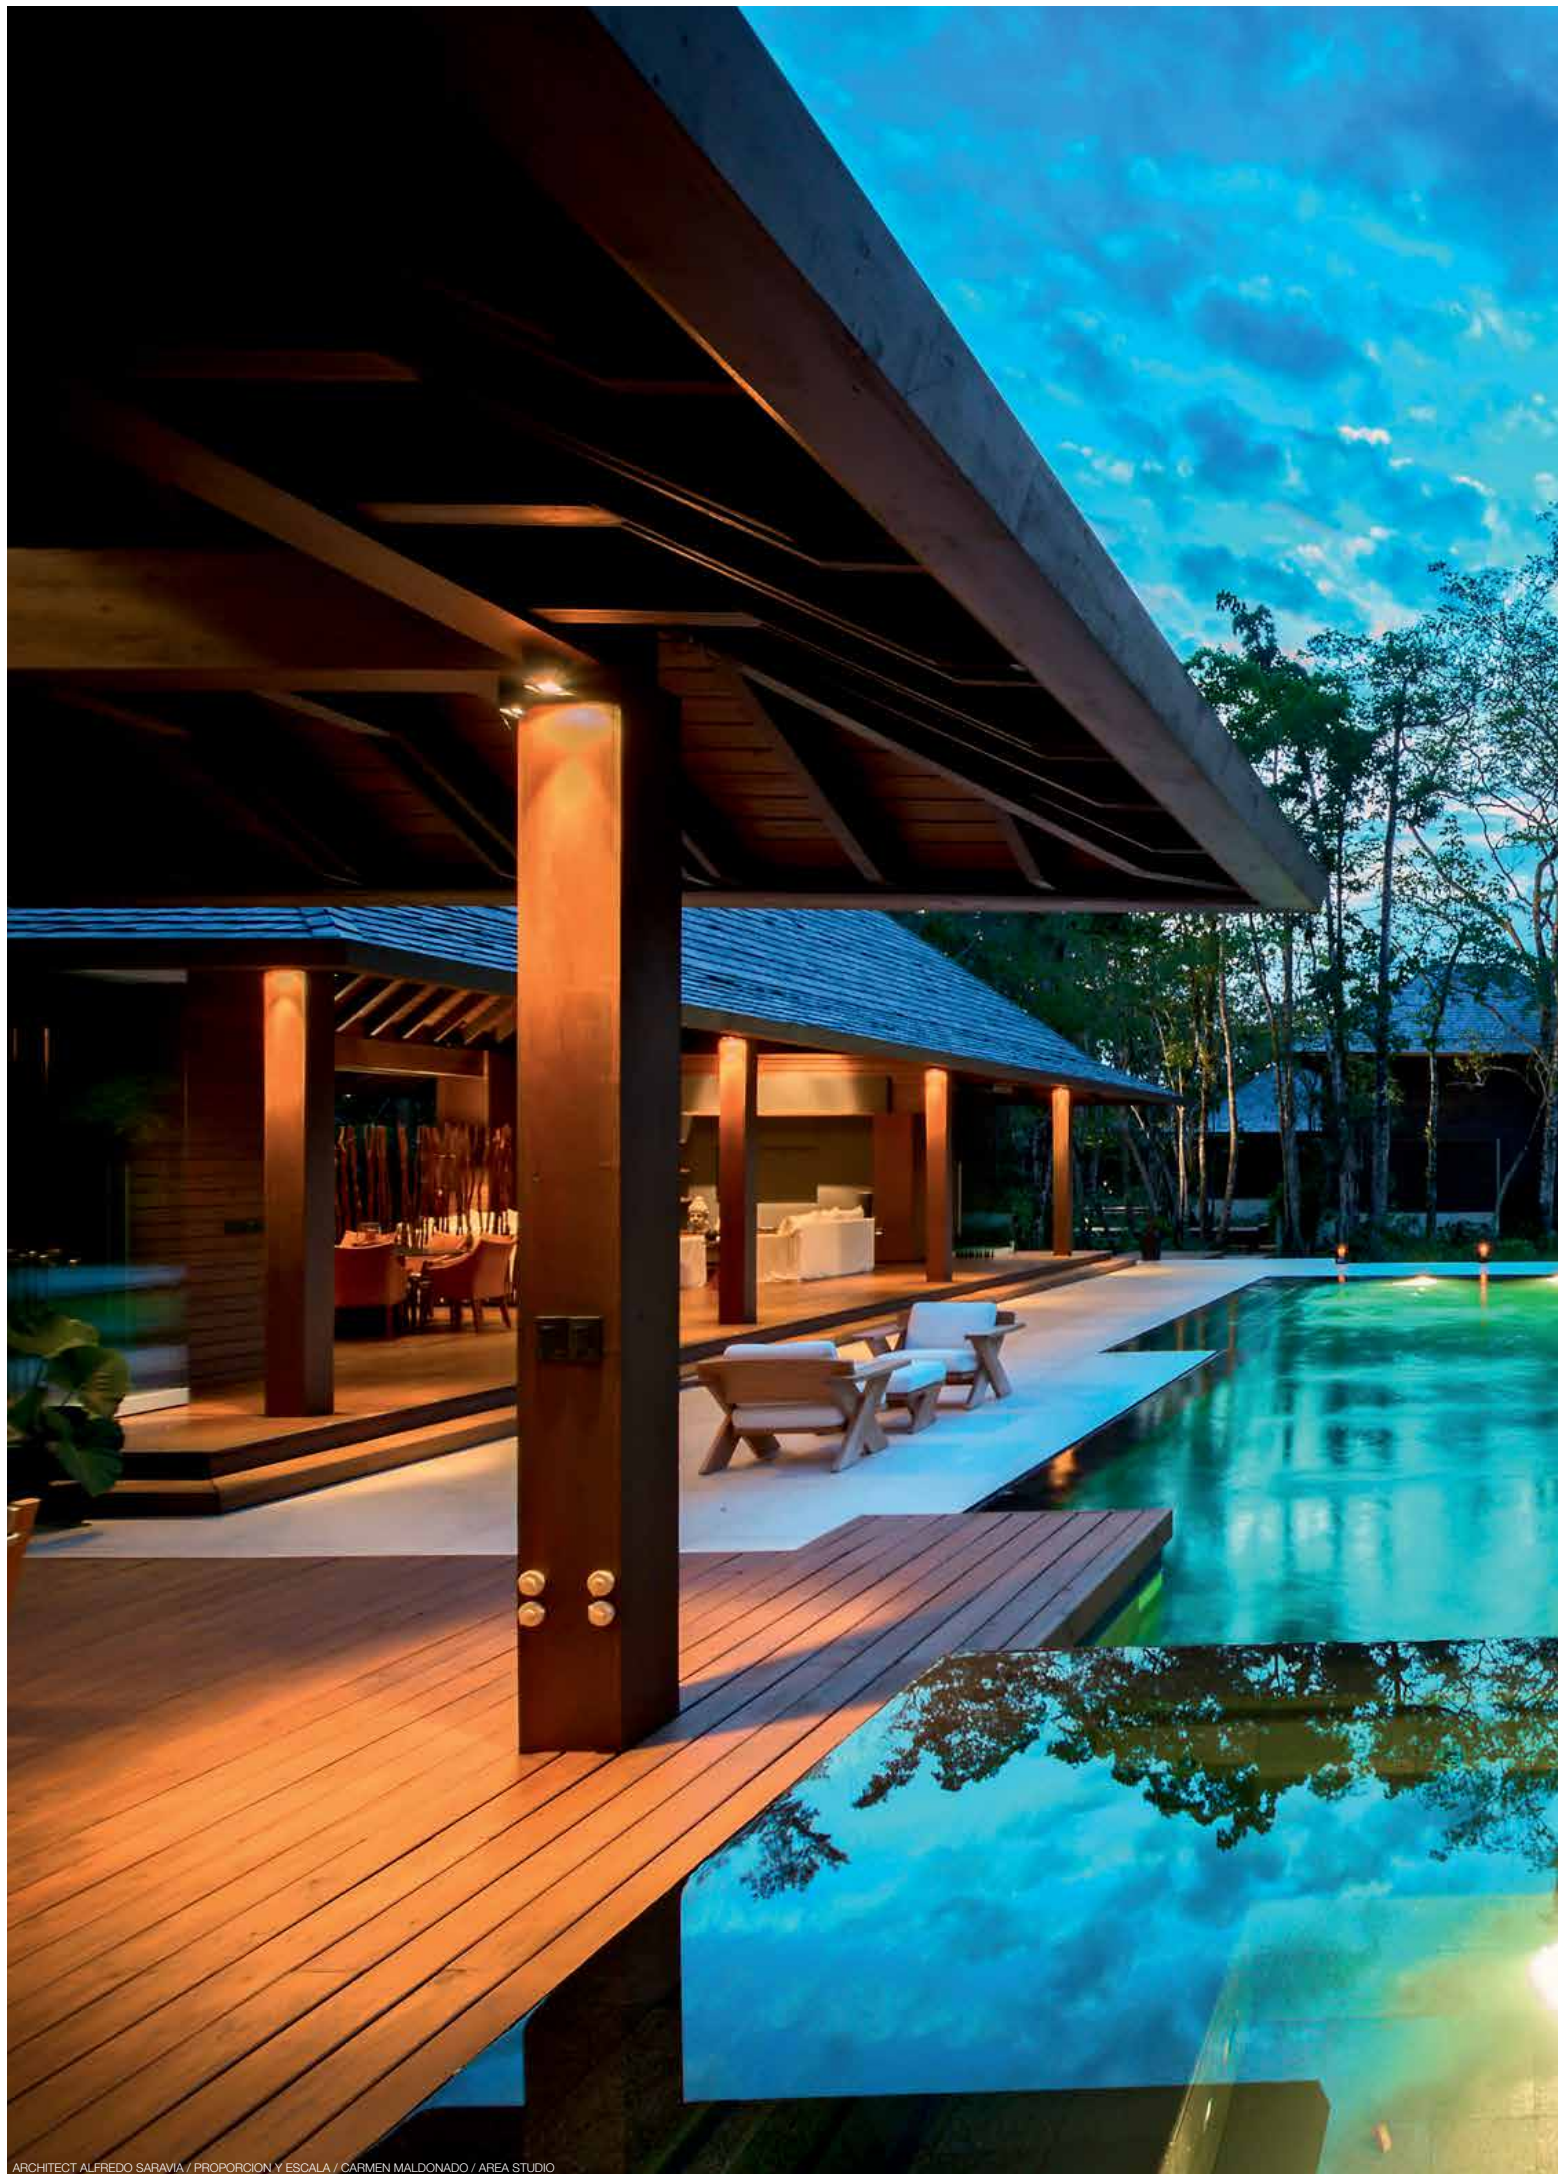





FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

STRAP
232 20 99
MAX. Ø200mm



CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER









STIG

NEW

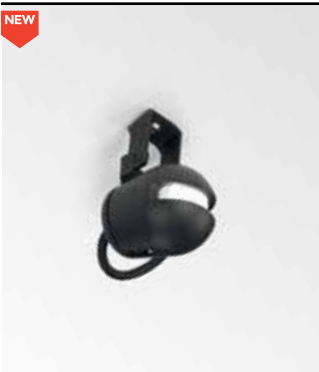



CRI > 80


3000
K

STIG

LED [E] 6W / 570lm / 500mA
LED [E] 8,7W / 723lm / 700mA

232 20 83 ◇
◇ = N

ADJUSTABLE
INCL.1 x CABLE H05 RN-F 2 x 1mm² 2m



OPTIONS
STRAP
LED POWER SUPPLY 500-700mA-DC / DIM



OTHER CRI OR KELVIN ON REQUEST

deltalight.com EXT 785



FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION

STRAP

232 20 99

MAX. Ø200mm




CONTROL GEAR

LED POWER SUPPLY

ALL INFO ON FOLD-OUT COVER



KIX S



CRI > 80

KIX S

LED [A] 1,1W / 120lm / 350mA
LED [A] 1,6W / 168lm / 500mA
LED [A] 2,3W / 223lm / 700mA

232 08 831 ◇
◇ = A / N

INCL.1 x CABLE H05 RN-F 2 x 1mm² 2m

IP65

OPTIONS

STRAP

LED POWER SUPPLY 350-700mA-DC / DIM

CRI > 80

INDUSTRIAL S

LED [A] 1,1W / 130lm / 350mA
LED [A] 1,6W / 181lm / 500mA
LED [A] 2,3W / 242lm / 700mA

306 01 04 ◇
◇ = A

LED [A] 1,1W / 120lm / 350mA
LED [A] 1,6W / 168lm / 500mA
LED [A] 2,3W / 223lm / 700mA

306 01 02 ◇
◇ = A

INCL.1 x CABLE H05 RN-F 2 x 0,75mm² 2m

IP67

OPTIONS

STRAP

LED POWER SUPPLY 350-700mA-DC / DIM